

OFC温馨提示：（产品快速检索使用说明）

OFC Friendly Reminder (Quick Product Search Guide):

您只需在目录索引处点击对应的产品，即可自动跳转到相对应页面。

Simply click the corresponding product in the Directory

Index to jump directly to its page!



点击此处直接  
跳转至“目录索引”

Click here to jump directly  
to the "Directory Index"

**OFC Lighting CoLimited**

香港欧菲斯照明有限公司  
中山市欧菲斯电子科技有限公司

地址：广东省中山市小榄镇绩东二骏利街2号  
Add: No. 12 Junli Street, Taichang Road,  
XiaoLan Town, Zhongshan City, Guangdong.

Email: sales@ofclighting.com  
officezm@126.com

Web: www.ofclighting.com

NEW PRODUCTS 2025-2026



工厂通过: ISO9001质量管理体系认证 SGS工厂审核 GRS认证  
ISO9001 CERTIFICATED, SGS SYSTEM AUDIT, GRS CERTIFICATED



# OFC

## OFC lighting

中山市欧菲斯电子科技有限公司，成立于2013年，拥有“OFC”“欧菲斯”两个自主品牌，公司致力于研发生产中高端办公照明、高端非标订制类灯具。公司拥有专业的研发设计、生产、服务团队，并通过ISO9001质量体系认证和SGS体系审核。我们拥有全工序制造设备，从灯珠贴片、模具制作、五金加工、铝材切割滚弧、面罩雕刻等全工序，同时设有安规检测、积分球、IES暗房等检测设备。从项目立案、产品落地到项目达成，我们均给予专业的配合。

欧菲斯照明得到国内外照明品牌的认可，并先后与多个内外品牌达成战略合作关系，共同完成

包括“杭州阿里巴巴产业园区”、“北京阿里巴巴产业园区”、“阿里巴巴—阿里百城全国行政板块办公楼”、“耐克上海总部”、“西安交通大学”、“新浪北京总部”、“西安创新港大厦”、“小米（北京）金山产业园区”、“贵州银行总部大厦”、“得力宁波、杭州总部”“腾讯总部”“OPPO总部研发园区”“OPPO总部智造园区”“南昌高级教育出版社”“哔哩哔哩上海总部”“中石油上海总部”“上海安踏总部”“杭州望朝/极氪汽车总部”标志性总部项目。打造多维度应用、高品质办公环境！

我们将持续致力于打造专业舒适的办公环境，希望有您的加入.....

Zhongshan OFC Electronic Technology Co., LTD. Founded in 2013, with "OFC" and "欧菲斯", two independent town brands, OFC Lighting Co., Ltd is committed to the R&D and manufacturing high-end office lighting and non-standard customized lighting products. We have a professional team includes R&D, manufacturing, and pre-sale and post-sale service team. We passed the ISO9001 quality system certification and SGS system audit. 100% internal full process manufacturing equipment, from LED SMD, mold making, hardware processing, aluminum cutting and bending, diffuser 2nd operation like cutting, drilling etc to final assembly. Equipped products compliance test machines, integrating sphere, IES dark room and other testing equipment.

Our team are providing professional support and service to customer from project start, products feasibility analysis, till customer win the projects. OFC Lighting Co., Ltd has been widely recognized by famous lighting brand at home and abroad and achieved strategic cooperative partnership with PHILIPS, THORN and NVC together with them, we perfectly finished, "Hangzhou Alibaba Industrial Park", "Beijing Alibaba Industrial Park"; "Alibaba National Wide Administration Division Office Building"; "Nike Shanghai Headquarter", "Xi'an Jiaotong University"; "Xinlang Beijing Headquarter", "Xi'an Innovation Harbour Building"; "Xiaomi (Beijing) Jinshan Industrial Part"

We will continue to committed to creating professional and comfortable office environment, and looking forward to your joining.


# ENTERPRISE HONOR



欧菲斯已通过ISO9001质量管理体系认证，产品已通过TUV、CE、ETL认证并符合RoHS标准。我们以优雅的设计，先进的技术，优良的品质和良好的售后服务赢得了客户的好评。我们的产品出口到世界各地，特别是欧洲和中东地区。我们不仅销售自己的产品，也欢迎客户前来定制产品。欧菲斯真诚希望与广大客户携手合作，共创美好未来！

OFC LIGHTING has passed ISO9001 quality management system certification, and its products have passed TUV, CE, ETL certification and comply with RoHS standards. We have won the praise of customers with elegant design, advanced technology, excellent quality and good after-sales service. Our products are exported all over the world, especially to Europe and the Middle East. We not only sell our own products, but also welcome customers to customize products.

OFC LIGHTING sincerely hope to cooperate with our customers to create a better future!

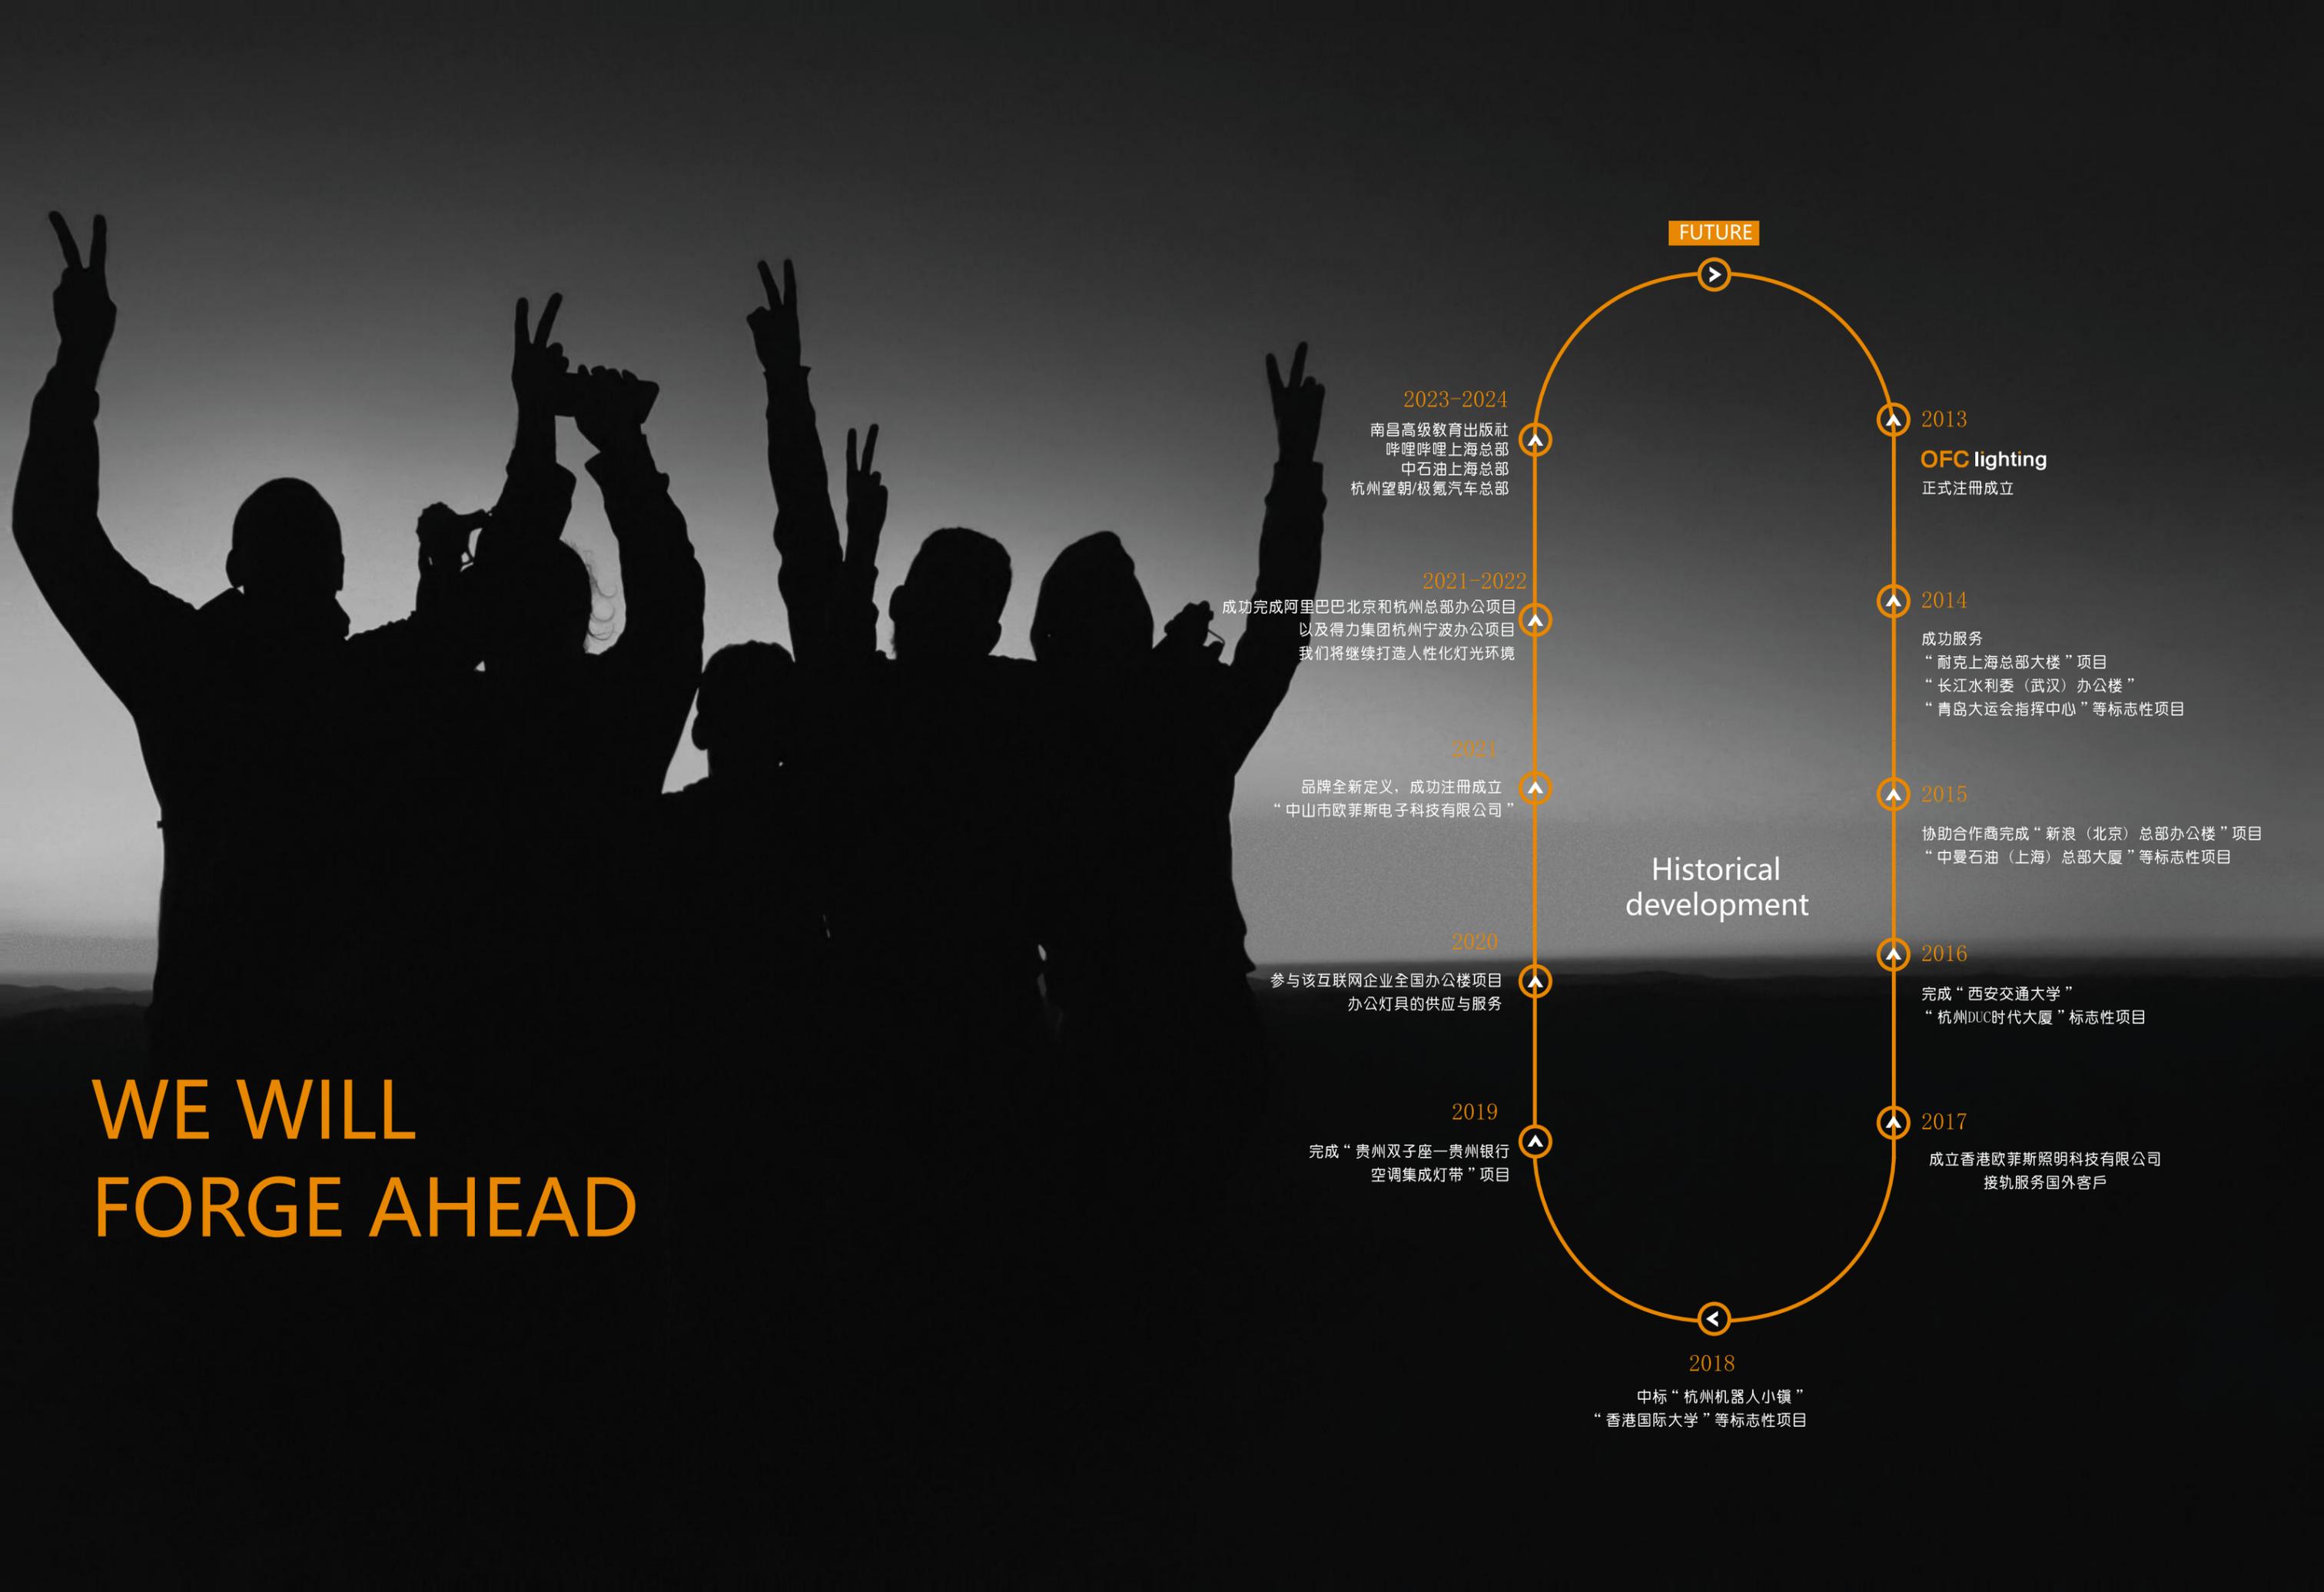

WE WILL  
FORGE AHEAD

FUTURE

Historical  
development

2023-2024  
南昌高级教育出版社  
哔哩哔哩上海总部  
中石油上海总部  
杭州望朝/极氪汽车总部

2021-2022  
成功完成阿里巴巴北京和杭州总部办公项目  
以及得力集团杭州宁波办公项目  
我们将继续打造人性化灯光环境

2021  
品牌全新定义，成功注册成立  
“中山市欧菲斯电子科技有限公司”

2020  
参与该互联网企业全国办公楼项目  
办公灯具的供应与服务

2019  
完成“贵州双子座—贵州银行  
空调集成灯带”项目

2018  
中标“杭州机器人小镇”  
“香港国际大学”等标志性项目

2013  
OFC lighting  
正式注册成立

2014  
成功服务  
“耐克上海总部大楼”项目  
“长江水利委（武汉）办公楼”  
“青岛大运会指挥中心”等标志性项目

2015  
协助合作商完成“新浪（北京）总部办公楼”项目  
“中曼石油（上海）总部大厦”等标志性项目

2016  
完成“西安交通大学”  
“杭州DUC时代大厦”标志性项目

2017  
成立香港欧菲斯照明科技有限公司  
接轨服务国外客户

# OFC LIGHTING OPTICS

## OFC照明光学




### Upglow+Underglow

光源可选泛光款和聚光款，上下两面发光空间灯光更均匀，层次感更强。




PMMA磨砂罩




蜂窝防眩罩（小）



眉毛防眩罩



蜂窝防眩罩（大）



棱晶防眩罩



格栅防眩罩



条纹防眩罩



射灯模组

# INTELLIGENT INDUCTION

## 智能感应




### COLOR TEMPERATURE CONTROL

#### 色温调节

只需一个简单的手势即可设置色温，从3000K暖色调到6000K冷色调。

The color temperature can be set with a simple gesture, from 3000K warm to 6000K cool.

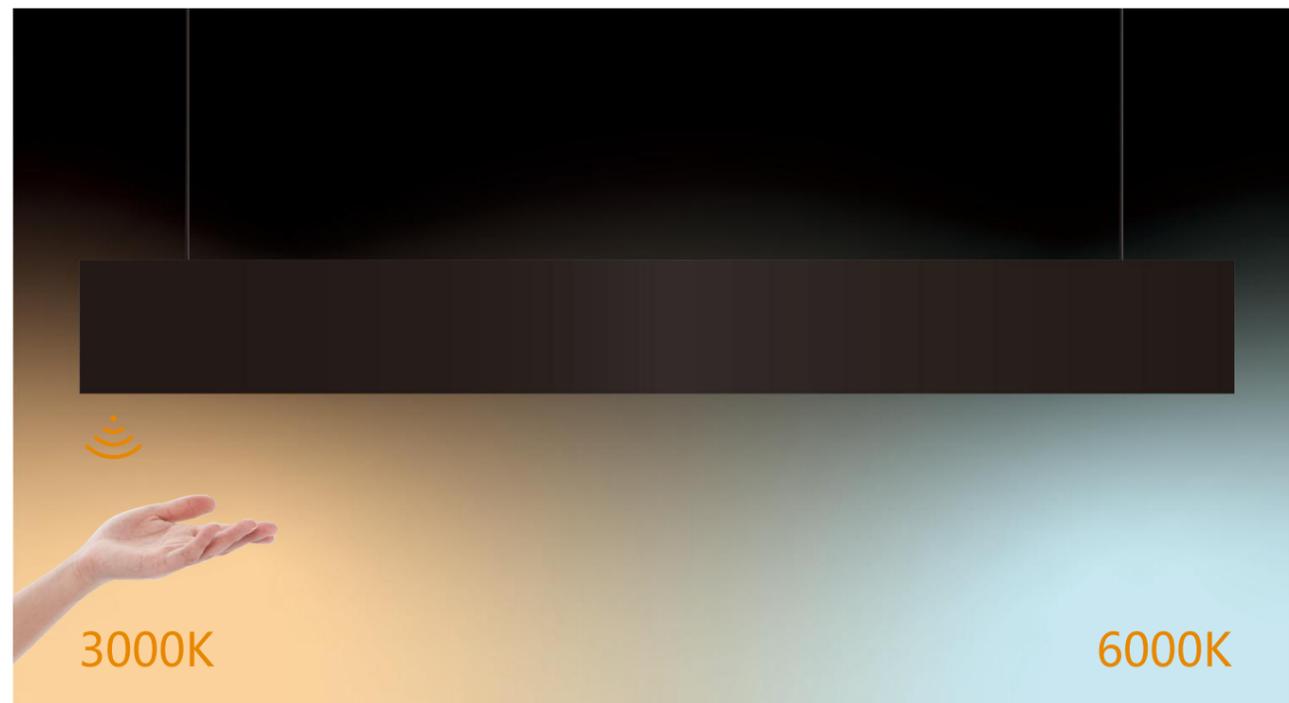


### DIMMABLE 5%-100%

#### 亮度调节

只需一个简单的手势即可设置亮度，从5%的暗光到100%的亮光。

The brightness can be set with a simple gesture, from 5% dark to 100% bright.

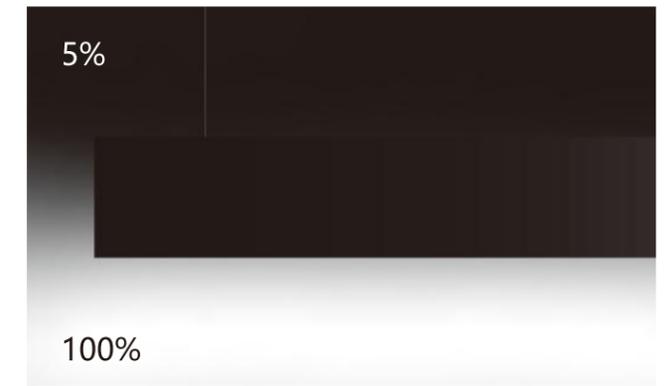

### LIGHT SENSING DIMMABLE

#### 光感调节

可通过灯具的两个LED光环提供双面光输出，上发光和下发光可以独立操作。

Double-sided light output can be provided through the two LED auras of the luminaire, and the up-light and down-light can be operated independently.




# CONTROL FLEXIBILITY

## 控制协议


OFC 灯具兼容多种控制系统。选择各种有线控制选项，或使用我们创新的蓝牙技术从智能设备进行无线控制。

OFC luminaires are compatible with multiple control systems. Choose between a variety of wired control options, or use our innovative Bluetooth technology for wireless control from a smart device.


休闲室  
Lounge

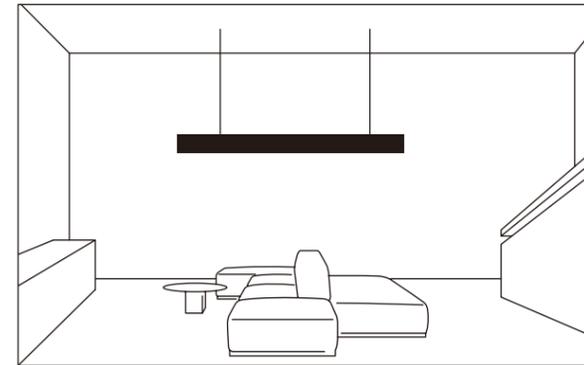


接待室  
Reception room

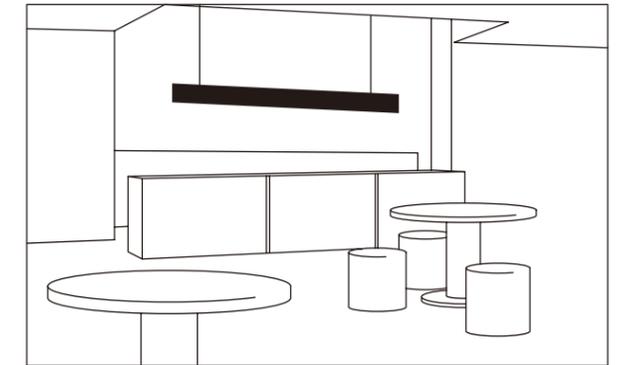

前台  
Foreground

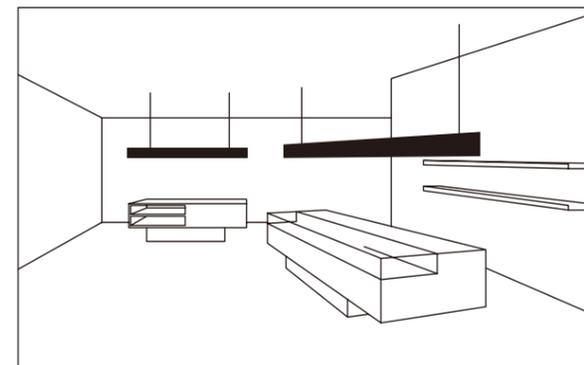

会议室  
Conference room

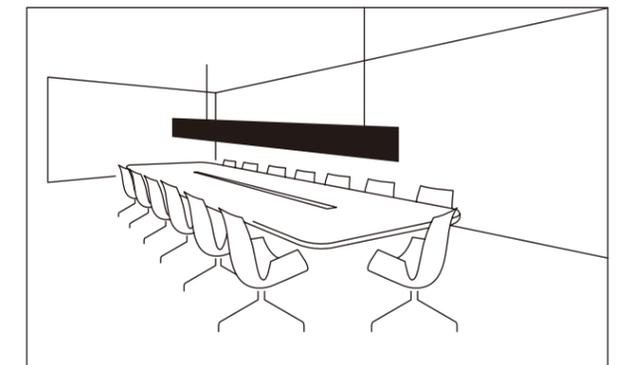

Connected by  
**OFC** | **WIZ**

提供各种智能控制方案

On/OFF  
Control

DALI8  
Control

DMX/RDM  
Control

1-10V  
Dimmers

TRIAC  
Dimmers

 DMXrdm

CASAMBI

专门为办公室场所提供高效、符合标准的照明。作为一款吊灯可以灵活地放置在办公室环境的最佳高度。在同样高的水平上实现视觉舒适性和光效，并将日光的节奏带入到办公室。

Specializes in efficient, standard-compliant lighting for office Spaces. As a chandelier, it can be flexibly placed at the best height in an office environment. Achieve visual comfort and light efficiency at the same high level, and bring the rhythm of daylight into the office.


# ICON INTERPRETATION


## 图标释义

**CE** CE 类型认证产品  
CE type certified products

 色温调节  
Color tune

**CRI > 90** 高显色指数  
Highcolor rendering index


 吊装式灯具  
Suspended lighting

 嵌装式灯具  
Recessed lighting

 室内应用  
Indoor application

 亮度调节  
Dimmable 5%~100%

**IP20** 保护级别  
Protection level

 明装式灯具  
Surface lighting


 铝方通灯具  
Aluminum side pass lighting

 抗眩光  
Anti glare

 微波感应  
Microwave induction

**100V ~ 240V** 100V~240V 输入电压  
Input voltage


 壁挂式灯具  
Wall lighting


 地装式灯具  
Ground lighting

 高视觉舒适度  
High visual comfort

 光感调光  
Light sensing dimming

**DIMM** 0-10V 调光  
Dimming 0-10V


 可拆卸嵌装式灯具  
Recessed detachable lighting


 落地式灯具  
Floor lighting

300mm to 3000mm 300mm~3000mm 尺寸可调  
Size adjustable

 手势调光  
Gesture dimming

**DALI** 照明控制系统  
DALI dimmable driver

 台式灯具  
Table lighting

 预埋式灯具  
Recessed trimless lighting

**3000K** 3000K~6000K 色温可调  
Color temperature adjustable

 手扫感应  
Hand scanning induction

 延时关灯  
Delay light off

**3000K** 3000K~4000K 色温可调  
Color temperature adjustable

 吊线可调  
Adjustable suspension wire

 支持多台组装拼台  
Multiple splices

 真实的阳光体验  
Real sunshine experience

 纳米技术, 还原瑞利散射  
Reduced Rayleigh scattering

 3060 标准规格  
Standard specifications


# PRODUCT INDEX

## 产品索引

Page  
P001~006

Suspended lighting  
吊装式灯具

### CHORD

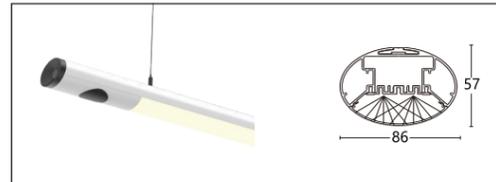

KD8657  
P. 006

Page  
P007~012

Suspended lighting  
吊装式灯具

### FLOW LINES




KD4575  
P. 012

Page  
P013~020

Suspended / Surface lighting  
吊装式/明装式灯具

### KD917S EDO异度系列

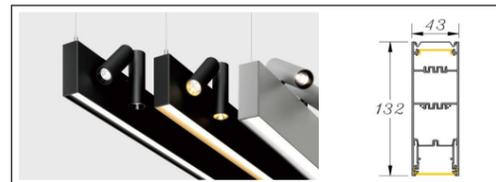

KD917S  
P. 020

Page  
P021~030

Suspended / Surface lighting  
吊装式/明装式灯具

### TORUS 图乐斯



KD075/KD105

Page  
P031~030

Suspended / Surface lighting  
吊装式/明装式灯具

### ARTHUS 阿图斯




KD7-B075  
KD7-C075 KD-C105  
KD70160 KD70260  
KD70350 KD70480  
KD70600 KD70800

Page  
P041~044

Suspended / Recessed / Surface lighting  
吊装式/嵌装式/明装式灯具 异形非标订制


### HERIK 赫科

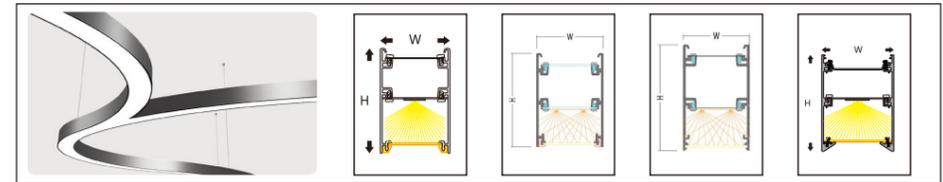

Page  
P045~048

Suspended lighting  
吊装式灯具

### HEXAGON 六边形

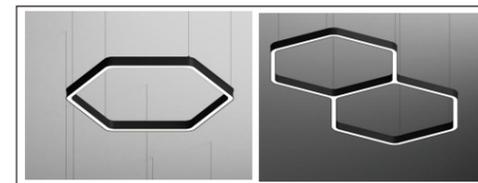

Page  
P049~050

Suspended lighting  
吊装式灯具

### INTREACT 智慧工业 汽车拱形光廊




# PRODUCT INDEX

## 产品索引


Page  
P056~093

Suspended lighting  
吊装式灯具


### WIP PLUS




KD7024 P. 056




KD906-L1 P. 062




KD934 P. 064




KD935 P. 068




KD6060 P. 070




KD933 P. 073




KD15060 P. 074




KD931 P. 078




KD936 P. 082




KD940 P. 084




KD857 P. 086




KD10050 P. 089




KD12050 P. 089



KD14845 P. 090



KD15040 P. 092




KD20050 P. 093


Page  
P105~114

Suspended lighting  
吊装式灯具


### WIP PRO




KD921S-A P. 105




KD921S-F P. 105




KD921S-G P. 106




KD918-A P. 107




KD918-F P. 107




KD918/5T-G P. 108




KD918/1T-G P. 108




KD904-A P. 110




KD904-F P. 110




KD904/5T-G P. 110




KD904/1T-G P. 110




KD914/5T-G P. 112



KD914-A P. 112



KD914-L P. 112



KD914/5T-G P. 112


# PRODUCT INDEX

## 产品索引

Page  
P115~124

Suspended lighting  
吊装式灯具


WIP

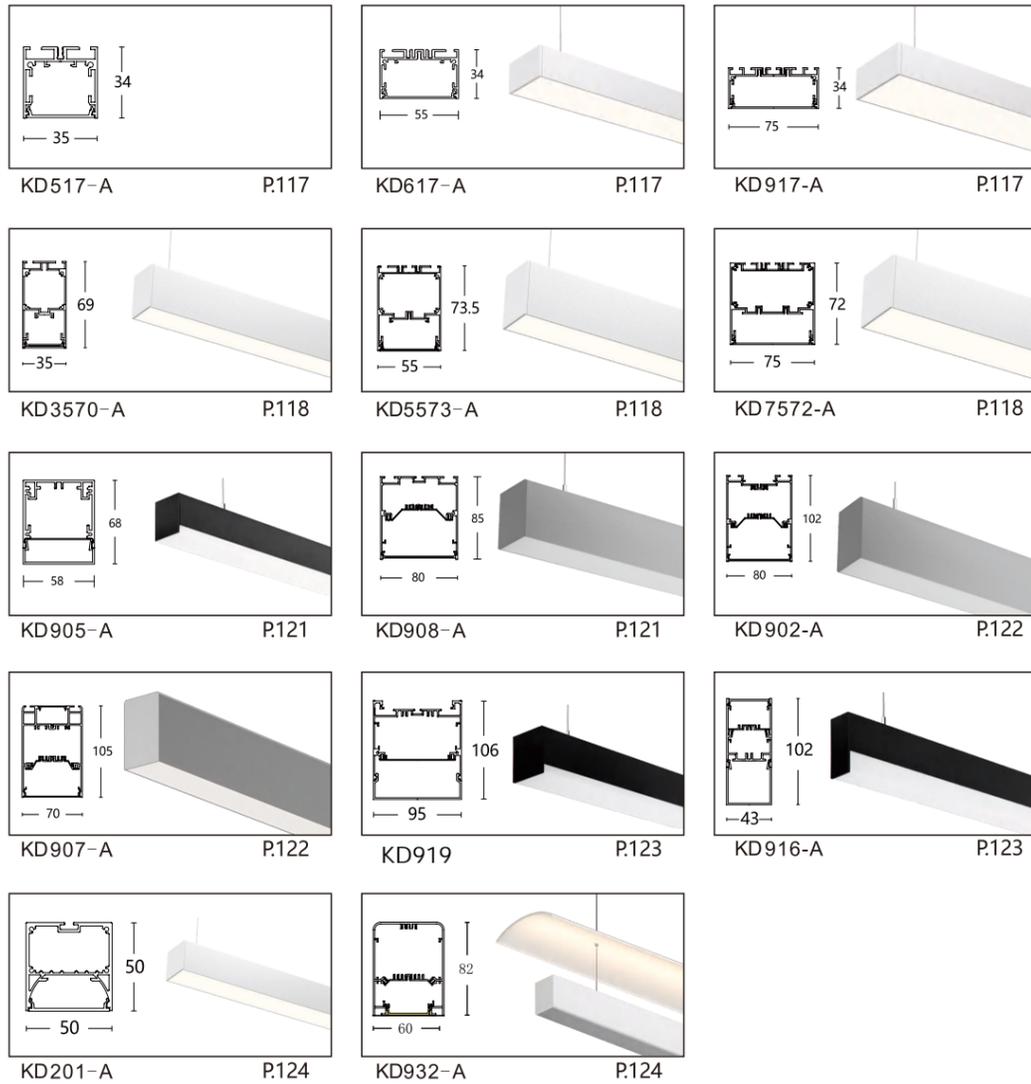

Page  
P125~130

Recessed lighting  
嵌入式灯具


FEDORA

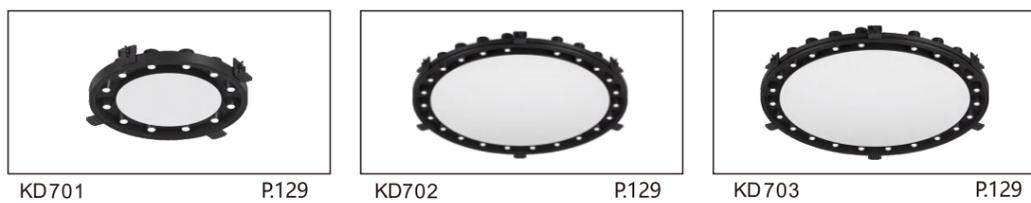

Page  
P131~142

Suspended / Recessed / Surface lighting  
吊装式/嵌装式/明装式灯具

HERIK

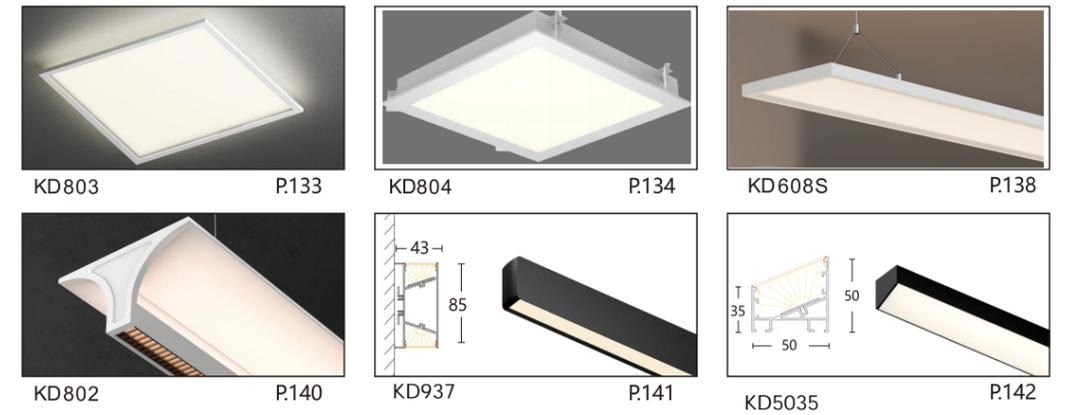

Page  
P143~156

Recessed lighting  
嵌入式灯具

TARA



# PRODUCT INDEX

## 产品索引


page P157~166  
Suspended / Recessed / Surface Aluminum side pass / Wall / Ground lighting  
吊装式/嵌装式/明装式/铝方通/壁装式/地装式灯具

### DJANA



page P167~174  
Suspended / Recessed / Surface Aluminum side passage  
吊装式/嵌装式/明装式/铝方通

### WOLF

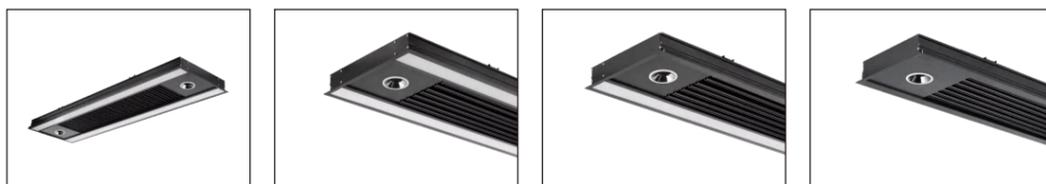


page P175~182  
商业照明

### SUH SERIES



page P183~190  
商业照明

### SKY SERIES

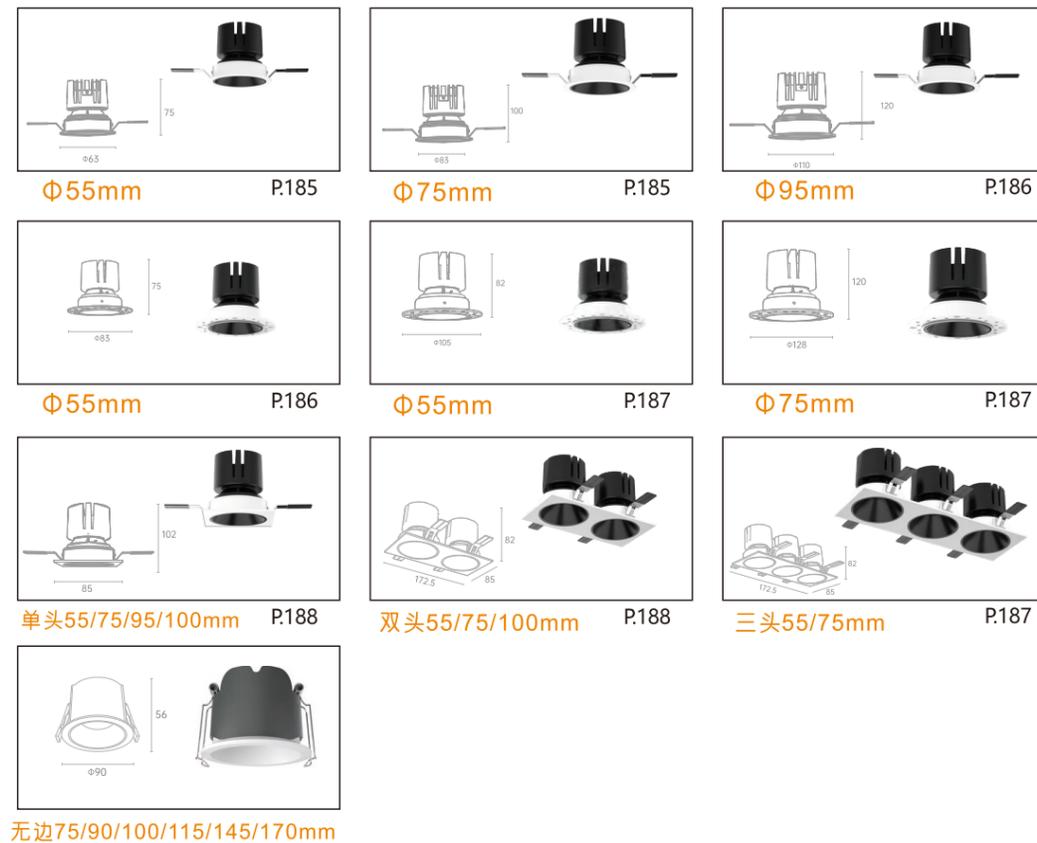

# CHORD

INSTALLATION MODE




LIGHT DISTRIBUTION






扩音器



具有蓝牙功能  
(可连接手机蓝牙播放音乐)

按压式锁线器卡扣



端盖可定制颜色



● 黑



○ 白




● 灰



OFC专利产品



# KD8657

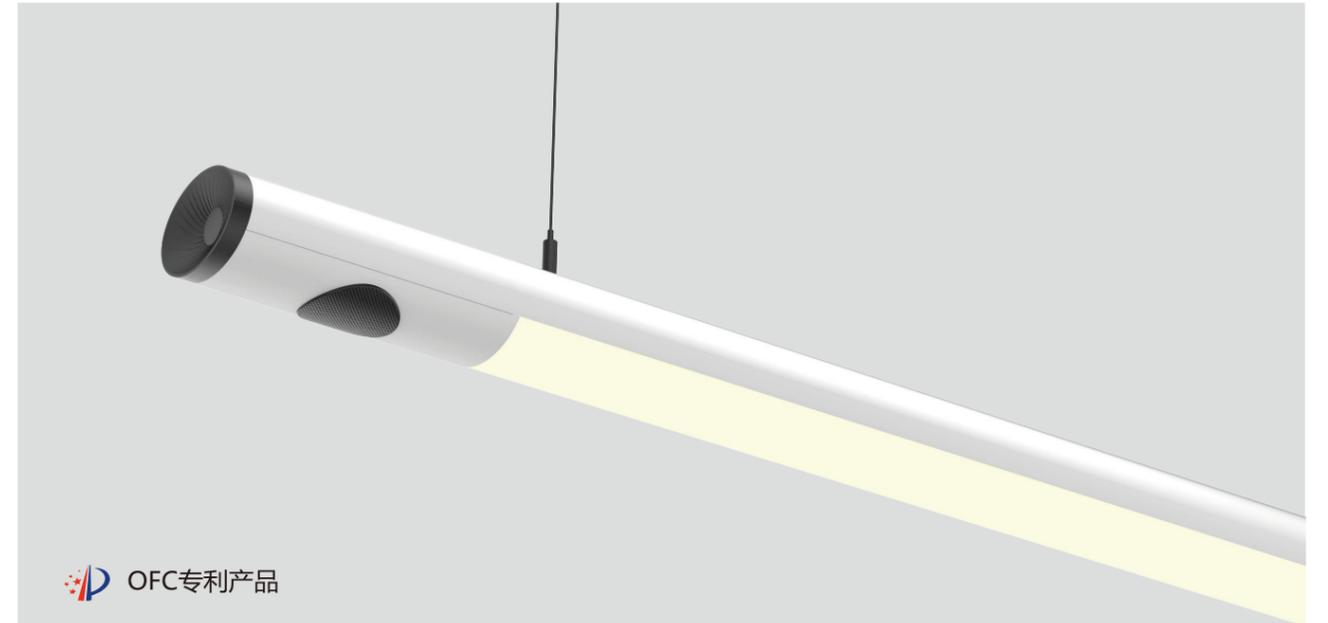

## PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W 115-130 lm/W
SIZE	L×W86×H57mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°


## TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%; margin-right: 5px;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%; margin-right: 5px; margin-left: 10px;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d3d3d3; border-radius: 50%; border: 1px solid black; margin-left: 10px;"></span> SR


1



## PHOTOMETRIC

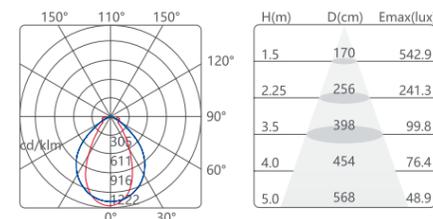


## LINE SKETCH

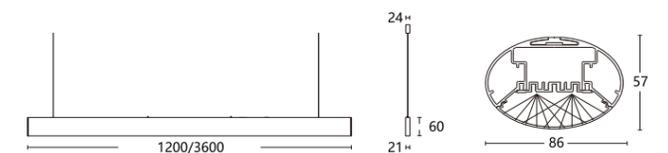

# FLOW LINES

KD-4575


INSTALLATION MODE



LIGHT DISTRIBUTION




50M 卷面长度

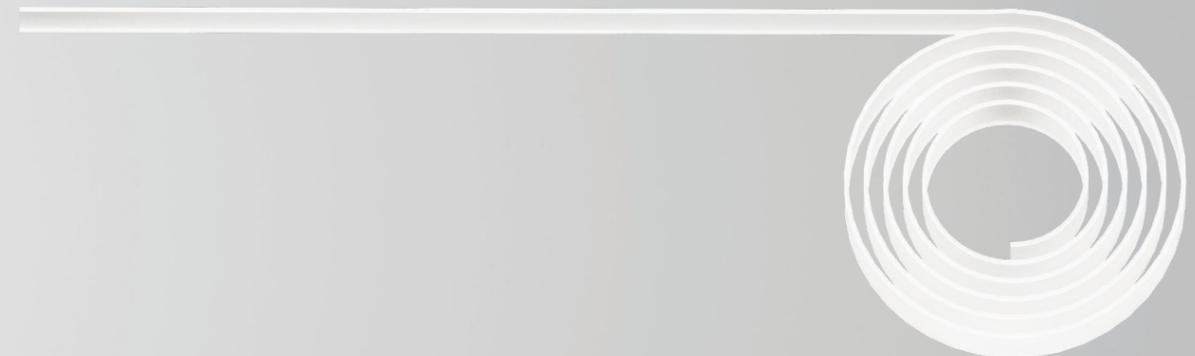



### 可增加射灯模组

Compatible With Spotlight Module

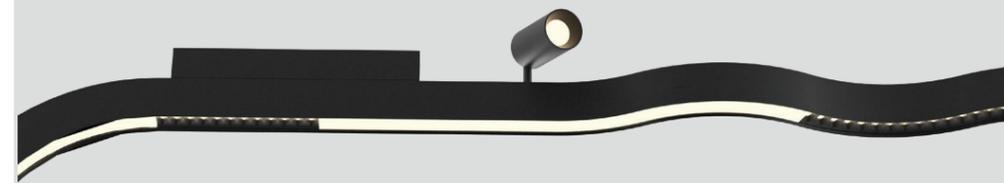

### 背部磁吸导轨条

Backside Compatible Magnetic Guid Rail



# 传统硅胶 VS 新型耐候材料

Normal Silicon Diffuser

New Invented Anti-Weathering Material



透光效率差  
Low Transmission



透光效率与进口面罩一致  
The Same Light Transmission as Normal PMMA Diffuser



会改变光的参数



有效控制灯光的色温偏差  
Effective Control Lighting Color Temperature



耐候性差 (容易发黄)  
Bad Anti-weathering Effect  
(Easy Yellowing)



耐候性强 (不发黄、不易质变)  
Excellent Anti-weathering Property  
(No Yellowing, No Basic Quacilty Change)

传统硅胶

VS

新型材料

KD4575




## PRODUCT PARAM ETER


POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W45×H75mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

## TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

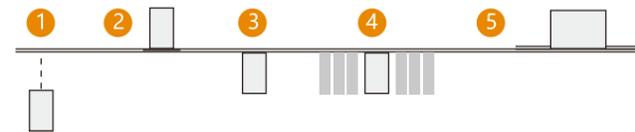

## PHOTOMETRIC

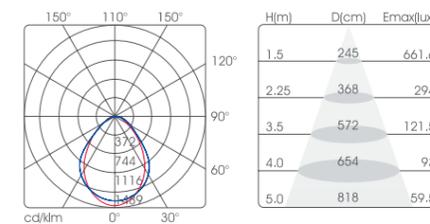


## LINE SKETCH

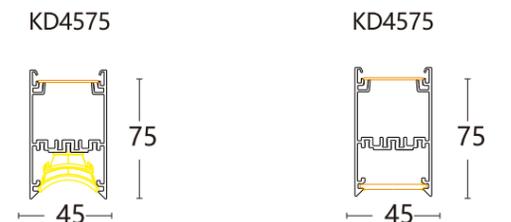




OFC欧菲斯 EDO异度系列产品:  
OFC LIGHTING EDO Series:

- 八种出光方式, 满足各种场景需求  
Eight kinds of diffusers with different light effect, versatile for all situations;
- 四种转接弯头, 实现DIY万能组合  
Four types of connectors, DIY universal combinations;
- 实现转接快速取电, 无需额外接线  
Quick power on once connect, no extra wiring;
- 整灯48V低压输出, 轻松兼容各种灯光智能控制系统  
48V low-voltage output, compatible with intelligent lighting control system easily;
- 搭载48V磁吸轨道射灯, 实现全景灯光组合  
48V magnetic track spotlights comprised, achieving panoramic light effect combination.




OFC欧菲斯 EDO异度系列产品:  
OFC LIGHTING EDO Series:

- 八种出光方式, 满足各种场景需求  
Eight kinds of diffusers with different light effect, versatile for all situations;
- 四种转接弯头, 实现DIY万能组合  
Four types of connectors, DIY universal combinations;
- 实现转接快速取电, 无需额外接线  
Quick power on once connect, no extra wiring;
- 整灯48V低压输出, 轻松兼容各种灯光智能控制系统  
48V low-voltage output, compatible with intelligent lighting control system easily;
- 搭载48V磁吸轨道射灯, 实现全景灯光组合  
48V magnetic track spotlights comprised, achieving panoramic light effect combination.

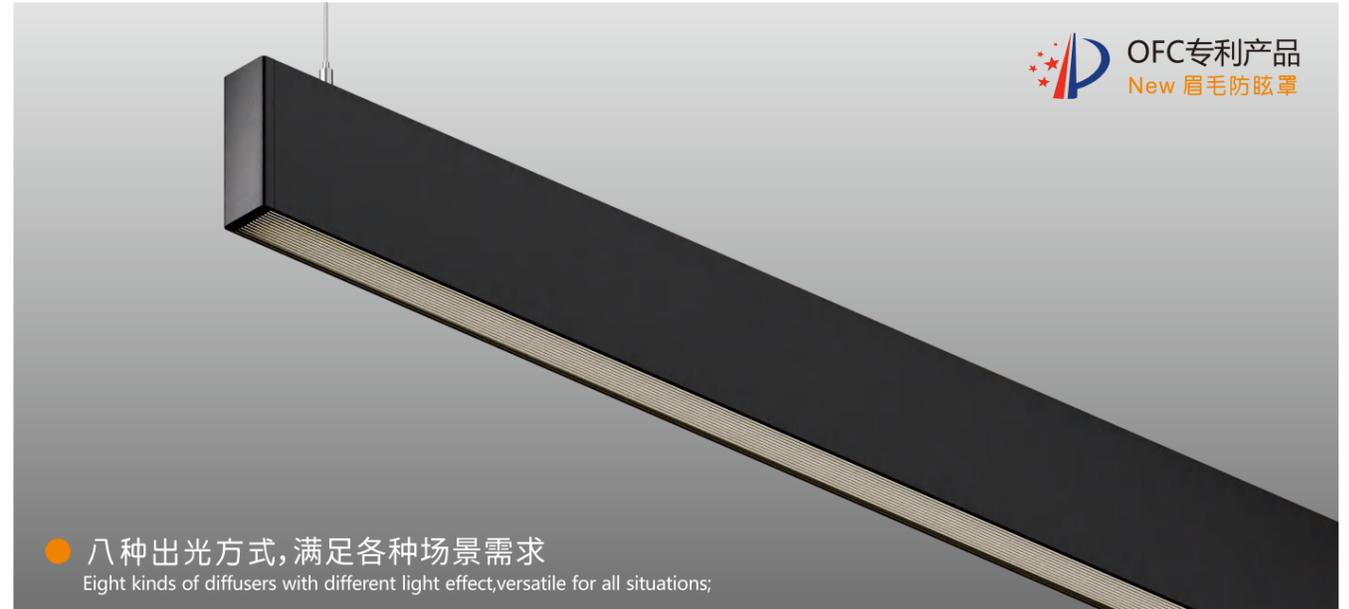


● 八种出光方式, 满足各种场景需求  
Eight kinds of diffusers with different light effect, versatile for all situations;

眉毛防眩罩  
Designed Eyebrow Like Anti-glare Diffuser

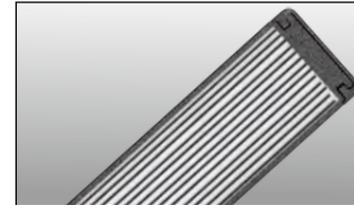

PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°




磨砂罩 PMMA Mat Surface Diffuse



PRODUCT PARAM ETER

POWER	25W/M
FLUX	110-125 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°




棱晶罩 MicroPrismatic Diffuser



PRODUCT PARAM ETER

POWER	25W/M
FLUX	110-125 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°





条纹罩 Linear Lines Diffuser



PRODUCT PARAM ETER


POWER	25W/M
FLUX	90-105 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°



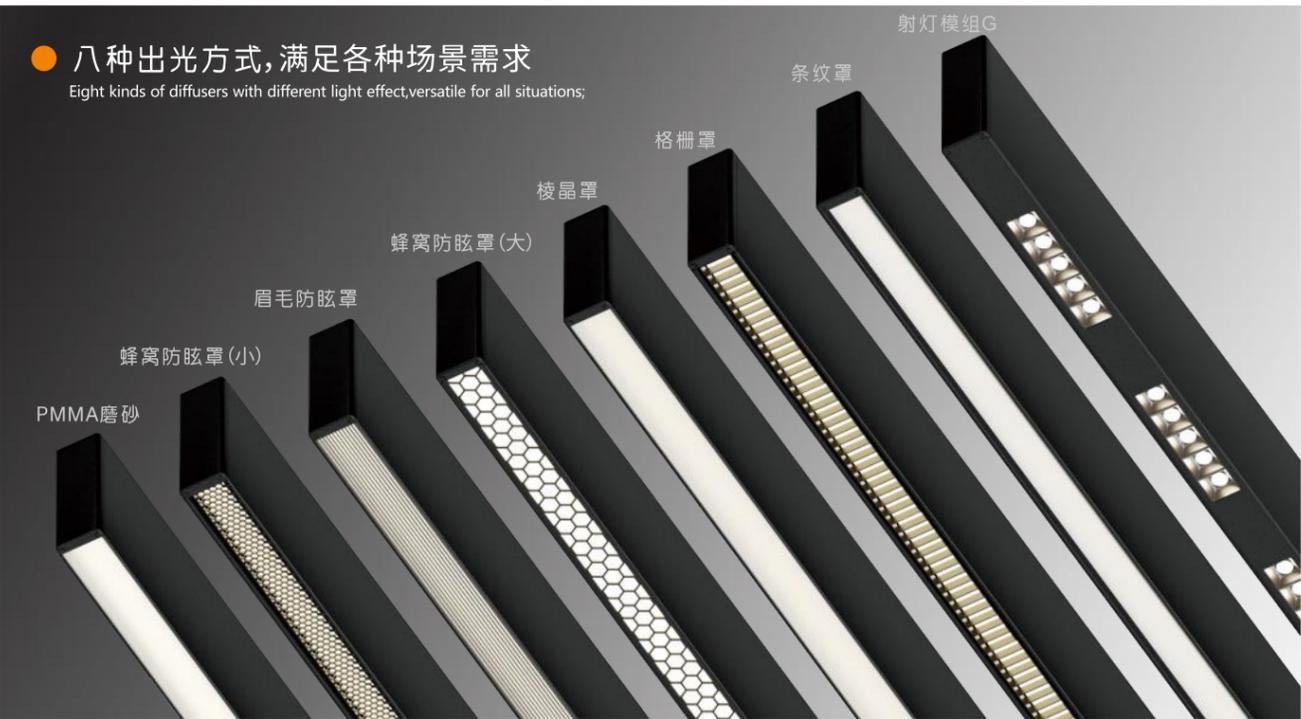


● 八种出光方式, 满足各种场景需求  
Eight kinds of diffusers with different light effect, versatile for all situations;


蜂窝防眩罩(大)  
Standard Honeycomb Diffuser




POWER	25W/M
FLUX	60-85 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°




蜂窝防眩罩(小)  
Mini Honeycomb Diffuser




POWER	25W/M
FLUX	60-85 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°



格栅罩 Grill Diffuser




POWER	25W/M
FLUX	90-105 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°



射灯模组G Lens Module



POWER	25W/M
FLUX	60-85 lm/W
CCT	3000k/4000k/6000k
BEAM ANGLE	110°



● 整灯48V低压输出, 轻松兼容灯光智能控制系统  
48V low-voltage output, compatible with intelligent lighting control system easily;











2PCS标准拼接  
2 PCS Standard Connection  
摆动角度:68-290°  
Angle Range: 68~290°

3PCS标准拼接  
3 PCS Standard Connection  
摆动角度:68-210-220°  
Angle Range: 68-210-220°

4PCS标准拼接  
4PCS Standard Connection  
摆动角度:68-150-160°  
Angle Range: 68-150-160°

2PCS快速直拼方式  
2PCS Quick Connection  
摆动角度:无Angle Range: N/A



● 四种转弯头, 实现DIY万能组合  
Four types of connectors, DIY universal combinations;

● 实现转接快速取电, 无需额外接线  
Quick power on once connect, no extra wiring;



KD917S EDO异度系列



- 搭载48V磁吸轨道射灯，实现全景灯光组合  
48V magnetic track spotlights comprised, achieving panoramic light effect combination.




背部磁吸导轨条 Backside Compatible Magnetic Guid Rail

PRODUCT PARAM ETER

POWER	10W 15W
FLUX	115 lm/W
SIZE	L×W43×H132mm
CCT	3000k/4000k
BEAM ANGLE	射灯角度 15°-24°-36°


PHOTOMETRIC



TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	Glass
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	● MB ● MW

LINE SKETCH

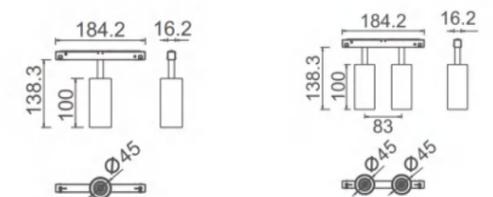


# TORUS

## 图乐斯·圆环灯


正面按压式安装更便利，IP44防尘防水，受热胀冷缩应力影响小防脱落更安全可靠，还可适配各种材质以增加防眩效果，通过特殊结构设计发光面最宽可做到300mm，广泛应用于机场地铁、CBD办公楼、大型商场、汽车4S店等大型项目。

Front press installation is more convenient, IP44 dustproof and waterproof, affected by thermal expansion and cold contraction stress small anti-fall more safe and reliable, but also suitable for various materials to increase the anti-glare effect, through the special structure design of the luminous surface can be up to 300mm, widely used in airport subway, CBD office buildings, large shopping malls, car 4S shops and other large projects.

### INSTALLATION MODE

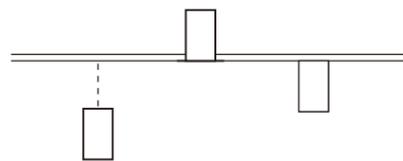


### LIGHT DISTRIBUTION

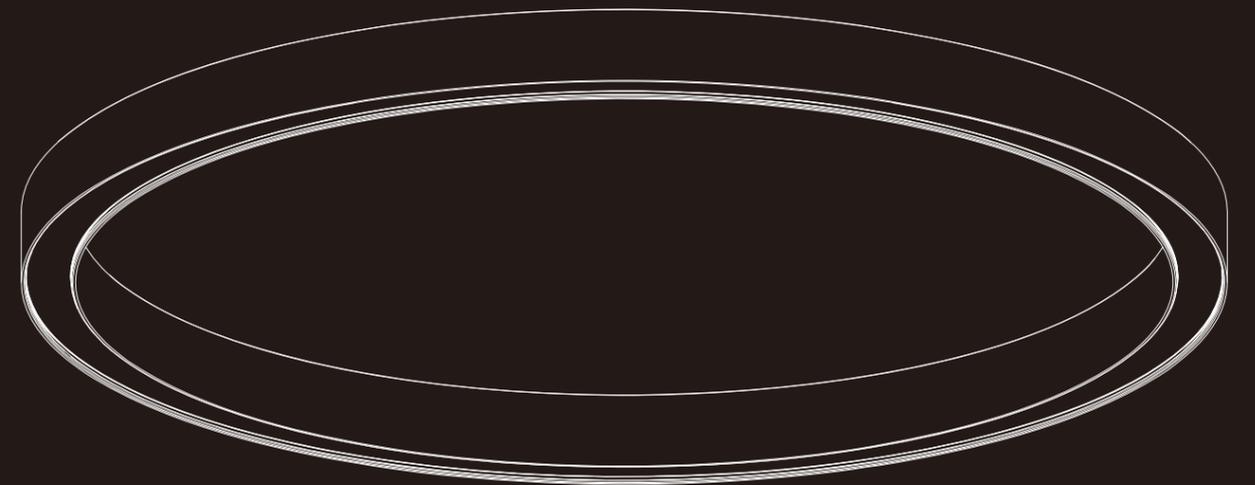





 OFC结构专利产品

OFC标准圆环  
OFC Standard Circular




D600/D800/D1000/D1200

其他直径可定制  
Other Diameter Customizable

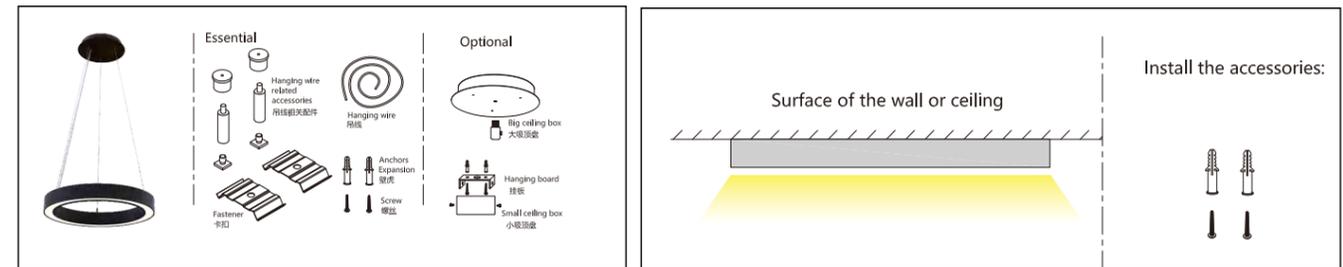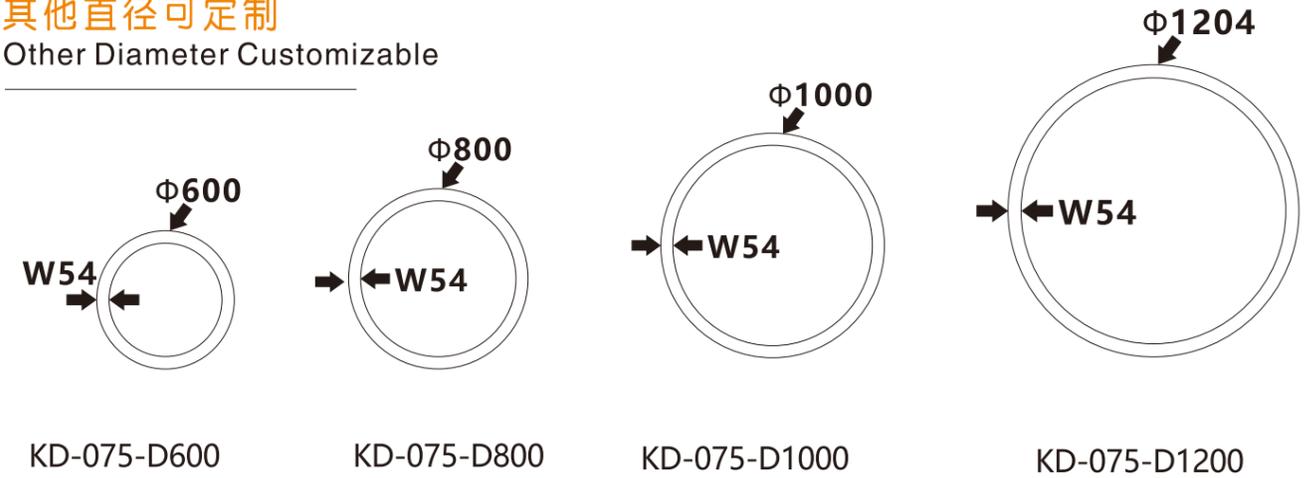

面罩为一体式  
A WHOLE PIECE OF DIFFUSER

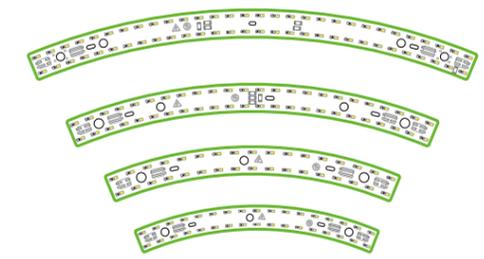

PCB


PRODUCT PARAMETER

POWER	25W/M
FLUX	80-95 lm/W    100-105 lm/W
SIZE	L×W54×H75mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS






BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA/PC
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

OFC标准圆环  
OFC Standard Circular




D1300/D2000

其他直径可定制  
Other Diameter Customizable

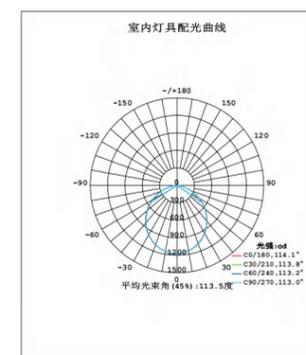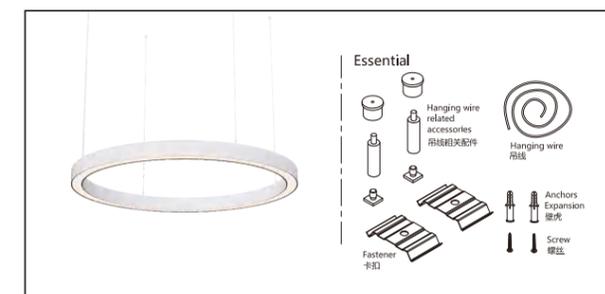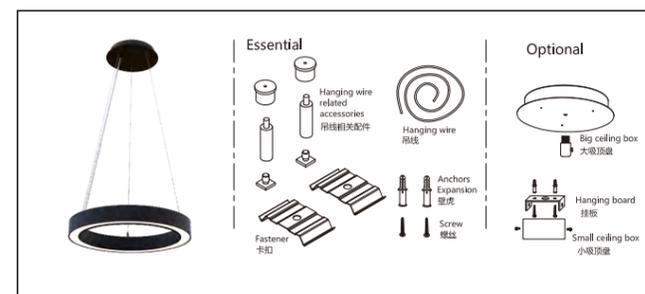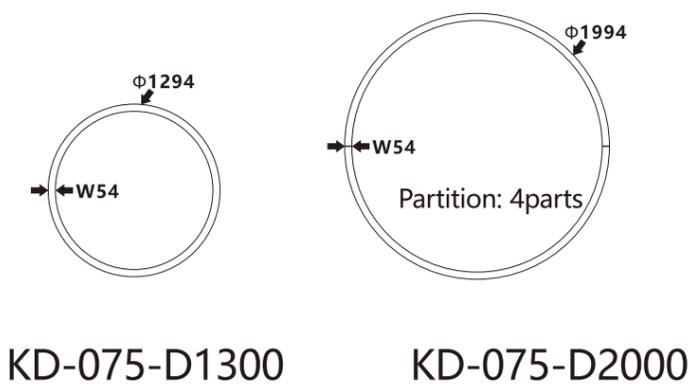

面罩为一体化/2PCS  
A WHOLE PIECE OF DIFFUSER//2PCS

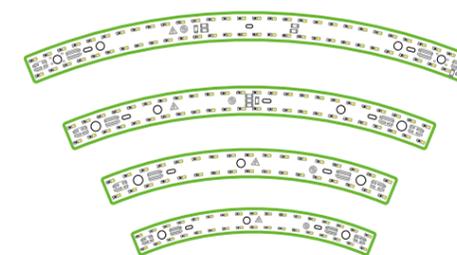

PCB

PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W    100-105 lm/W
SIZE	L×W54×H75mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°


TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA/PC
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	






OFC标准圆环  
OFC Standard Circular




D600/D800/D1000/D1200



其他直径可定制  
Other Diameter Customizable

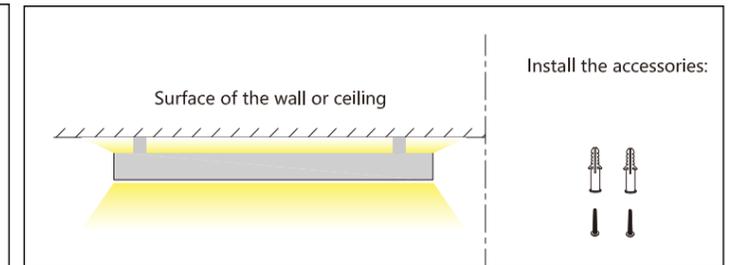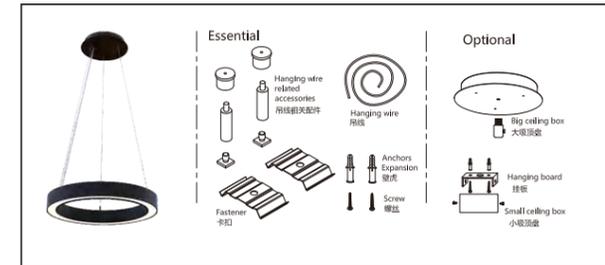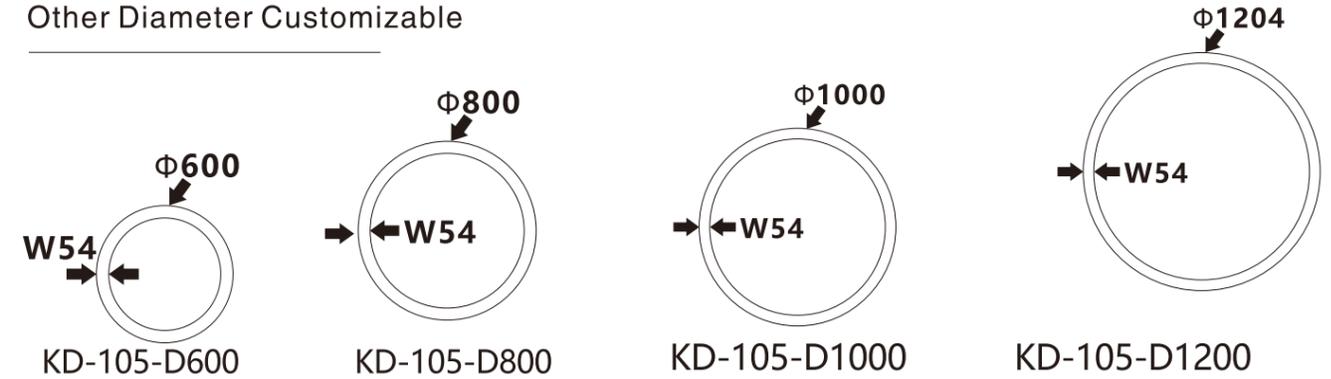

面罩为一体式  
A WHOLE PIECE OF DIFFUSER

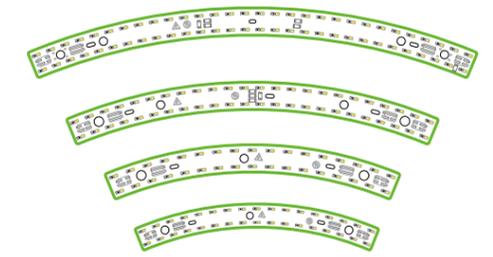

PCB


PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W 100-105 lm/W
SIZE	L×W54×H105mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA/PC
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

OFC标准圆环  
OFC Standard Circular




D1300/D2000





其他直径可定制  
Other Diameter Customizable




KD-105-D1300

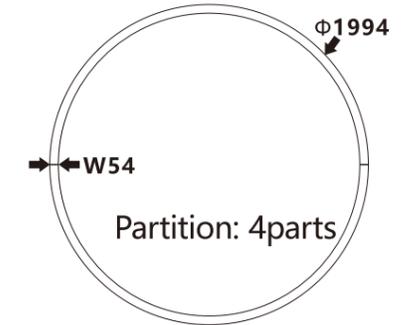

KD-105-D2000

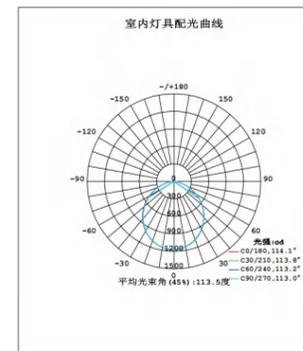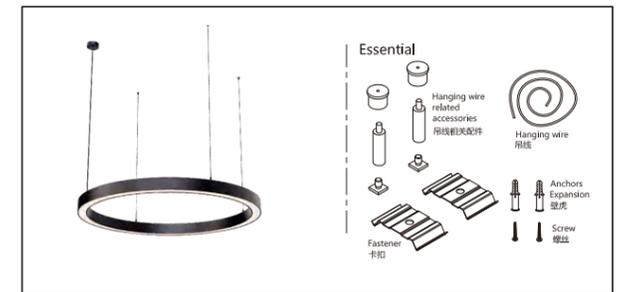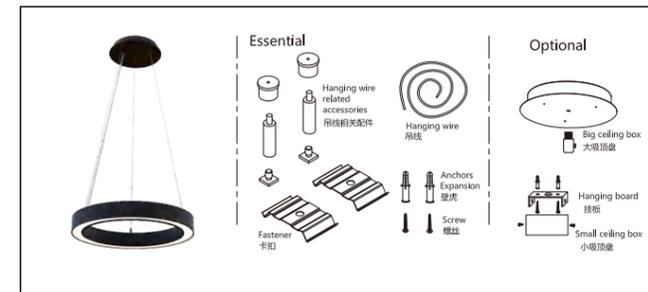

面罩为一体化/2PCS  
A WHOLE PIECE OF DIFFUSER//2PCS

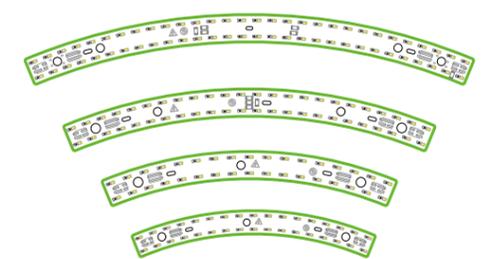

PCB

PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W    100-105 lm/W
SIZE	L×W54×H75mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA/PC
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	



# ARTHUS

## 阿图斯·圆饼灯

适用于机场、高铁站、商店、展厅、家庭、办公室、学校、工厂、医院、图书馆、超市、地铁、酒店、餐厅等场所。产品节能寿命长。

Suitable for airports, high-speed rail stations, shops, exhibition halls, families, offices, schools, factories, hospitals, libraries, supermarkets, subways, hotels, restaurants, etc., the product energy-saving long life.

### INSTALLATION MODE




### LIGHT DISTRIBUTION





KD-B075




可做尺寸Size: D400-D1200mm  
灯罩Cover: PC/PMMA  
可做上下发光 正压灯罩系列

FRONTPRESSUREL AMP SHADE SERIES


The front press type installation is more convenient, IP44 dustproof and waterproof, and it is less affected by thermal expansion and contraction stress, making it safer and more reliable to prevent falling. It can also be adapted to various materials to reduce the UGR. The maximum width can reach 300MM by the our structural design , which is widely used in big

STANDARD SIZE


All tests are subject to the following conditions:  
OSRAM 2835 LED+PHILIPS Driver+PMMA Diffuser




KD-B075-S  
45W/4050LM




KD-B075-M  
54W/5400LM




KD-B075-L  
90W/9000LM



KD-B075-1L  
150W/15000LM



DIFFUSER  
Opal Mat Surface Diffuser



DIFFUSER  
MicroPrismatic Diffuser

PRODUCT PARAM ETER

POWER	25W/M
FLUX	110-130 lm/W
SIZE	L×W54×H75mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°


TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA/PC
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

内压灯罩系列(平边)

INTERIORPRESSUREL AMPSHADE SERIES


Using hardware to press the lampshade tightly from the inside of the lamp body, dustproof and waterproof is IP44, and is less affected by thermal expansion and contraction stress, making it safer and more reliable to prevent falling. It can also be adapted to various materials to increase the anti glare effect. Through special structural design and thickening of the lampshade, the maximum width of the luminous surface can be 1200mm, suitable for various large circular cakes, and widely used in projects such as airports, subways, CBD office buildings, and large shopping malls.




KD-C075

STANDARD SIZE


All tests are subject to the following conditions:  
OSRAM 2835 LED+PHILIPS Driver+PMMA Diffuser




KD-C075-S  
70W/9800LM



KD-C075-M  
100W/14000LM



KD-C075-L  
150W/21000LM




KD-C075-1L  
180W/25000LM



DIFFUSER  
Opal Mat Surface Diffuser



DIFFUSER  
MicroPrismatic Diffuser



KD-C105

可做尺寸Size: D400-D1200mm

灯罩Cover: PC/PMMA

可做上下发光或双色温


内压灯罩系列(内凹防眩)

INTERIORPRESSUREL AMPSHADE SERIES


Using hardware to press the lampshade tightly from the inside of the lamp body, dustproof and waterproof is IP44, and is less affected by thermal expansion and contraction stress, making it safer and more reliable to prevent falling. It can also be adapted to various materials to increase the anti glare effect. Through special structural design and thickening of the lampshade, the maximum width of the luminous surface can be 1200mm, suitable for various large circular cakes, and widely used in projects such as airports, subways, CBD office buildings, and large shopping malls.

STANDARD SIZE


All tests are subject to the following conditions:  
OSRAM 2835 LED+PHILIPS Driver+PMMA Diffuser  
LED double color or up to 140LM/W  
可做双色或双珠提高光效到140LM/W




70W/9800LM



100W/14000LM



150W/21000LM



180W/25000LM



## ULTRA-THIN DESIGN



精选优质亚克力板并采用吊顶大阴影透光设计，使整个空间更加明亮通透，密封设计，防尘防虫，有效防止固体粉尘、蚊虫进入。光源装有透镜，折射和扩散的原理使光发散的范围更广。




The selected high-quality acrylic panel adopts the light transmission design of large shadow of the ceiling, make the whole space brighter and more transparent, sealed design, dust and insect prevention, and effectively prevent the entry of solid dust and mosquitoes. The light source is equipped with a lens, and the principle of refraction and diffusion makes the light diverge more widely.




PRODUCT CODE	SIZE	POWER	FLUX	BEAM ANGLE
KD70160	Φ160×H50mm	12W		
KD70260	Φ260×H62mm	20W		
KD70350	Φ350×H62mm	30W		
KD70480	Φ480×H62mm	45W		
KD70600	Φ600×H62mm	54W	105-130 lm/W	110°
KD70800	Φ800×H82mm	60W		

ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR
/	3000k/4000k/6000k	SB                      SW

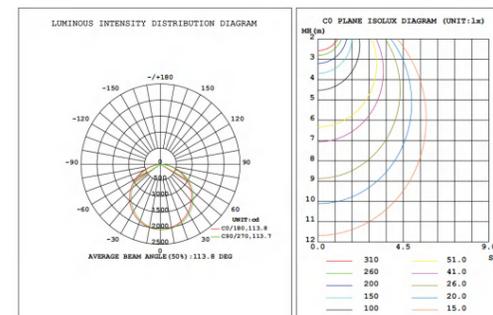

DIFFUSER  
Opal Mat Surface Diffuser





DIFFUSER  
MicroPrismatic Diffuser

# FREE SPLICING

## 自由拼接

创意异形灯——造型多变，自由拼接。各种形状和创意组合，可定制任意形状和宽度。光线通过唯一的出口向下照射，并像光环一样围绕着灯具。灯体有白色和黑色可供选择。

Creative special shaped lamp - changeable shape, free splicing. Various shapes and creative combinations can be customized in any shape and width. The light shines down through the only outlet and surrounds the fixture like a halo. The lamp body is available in white and black.

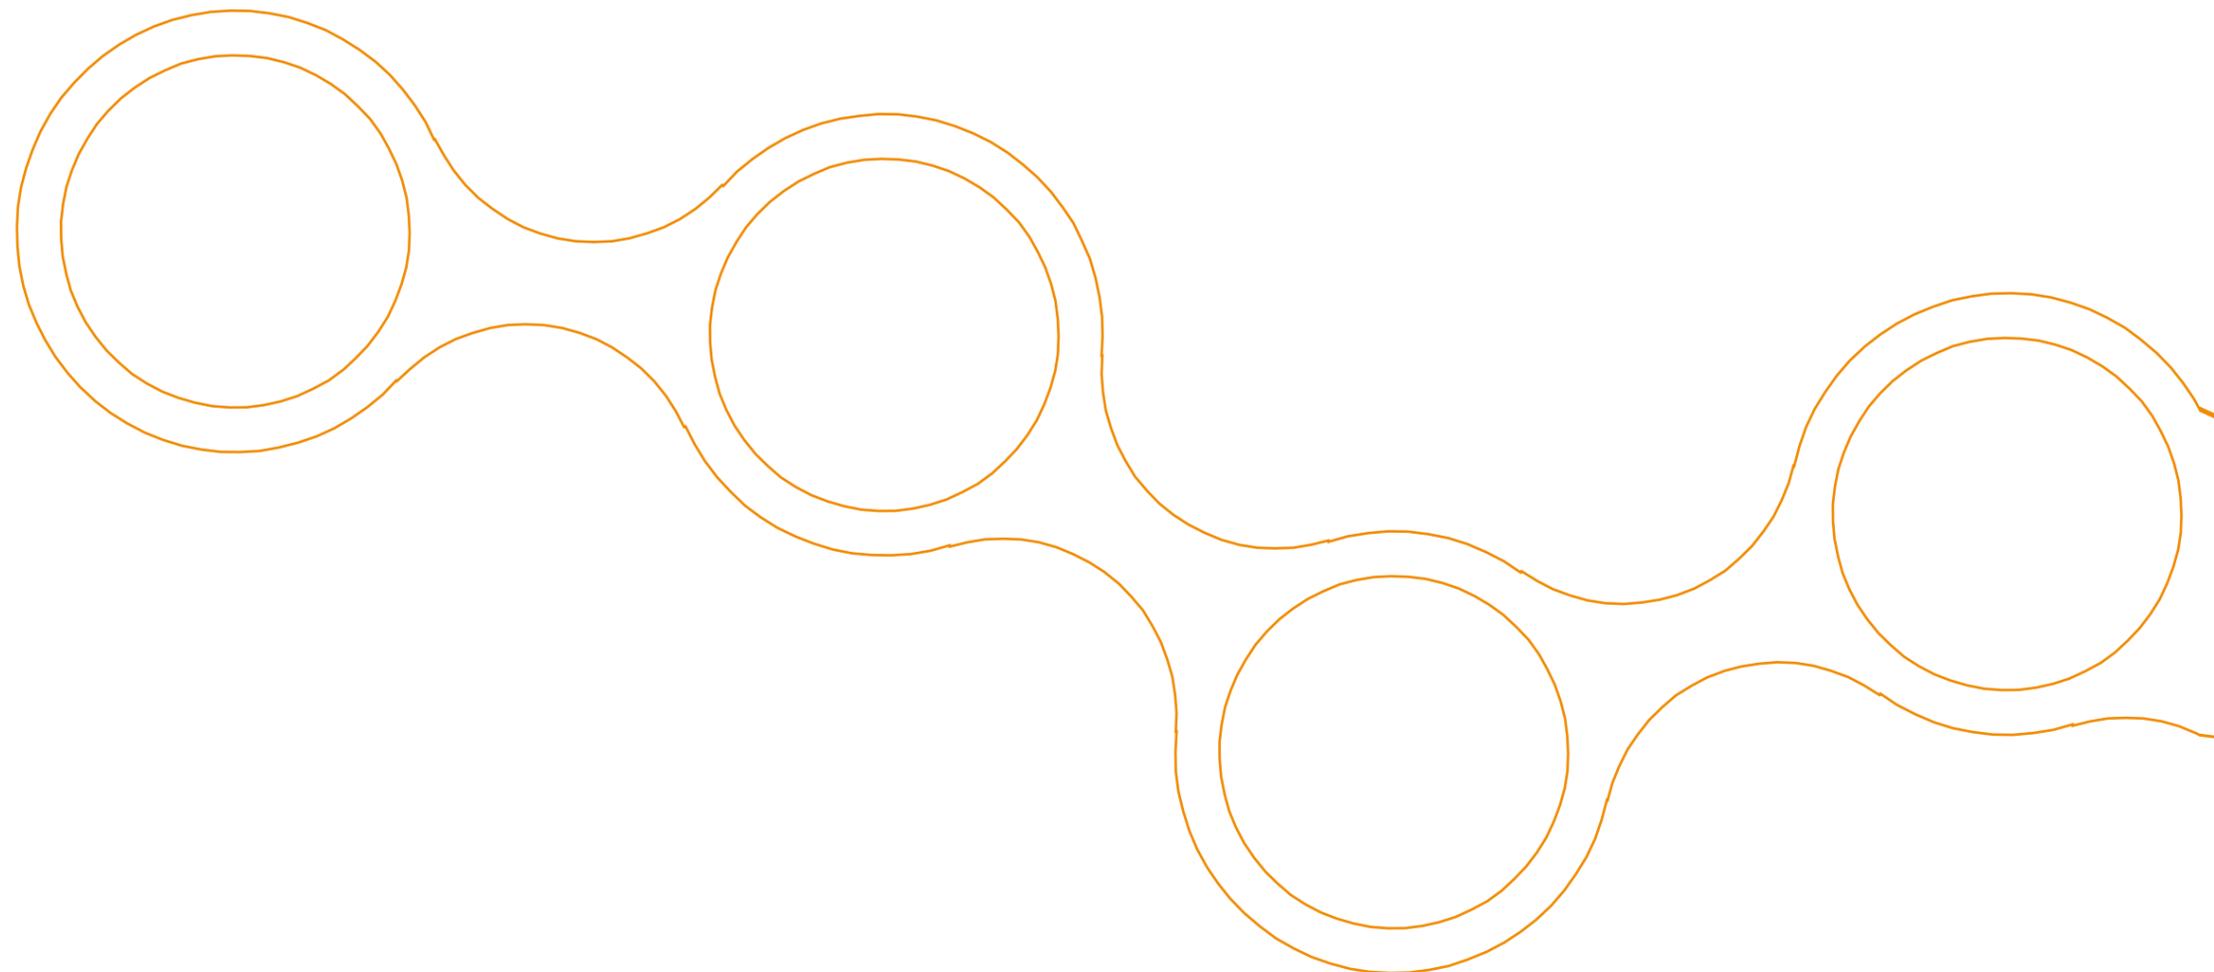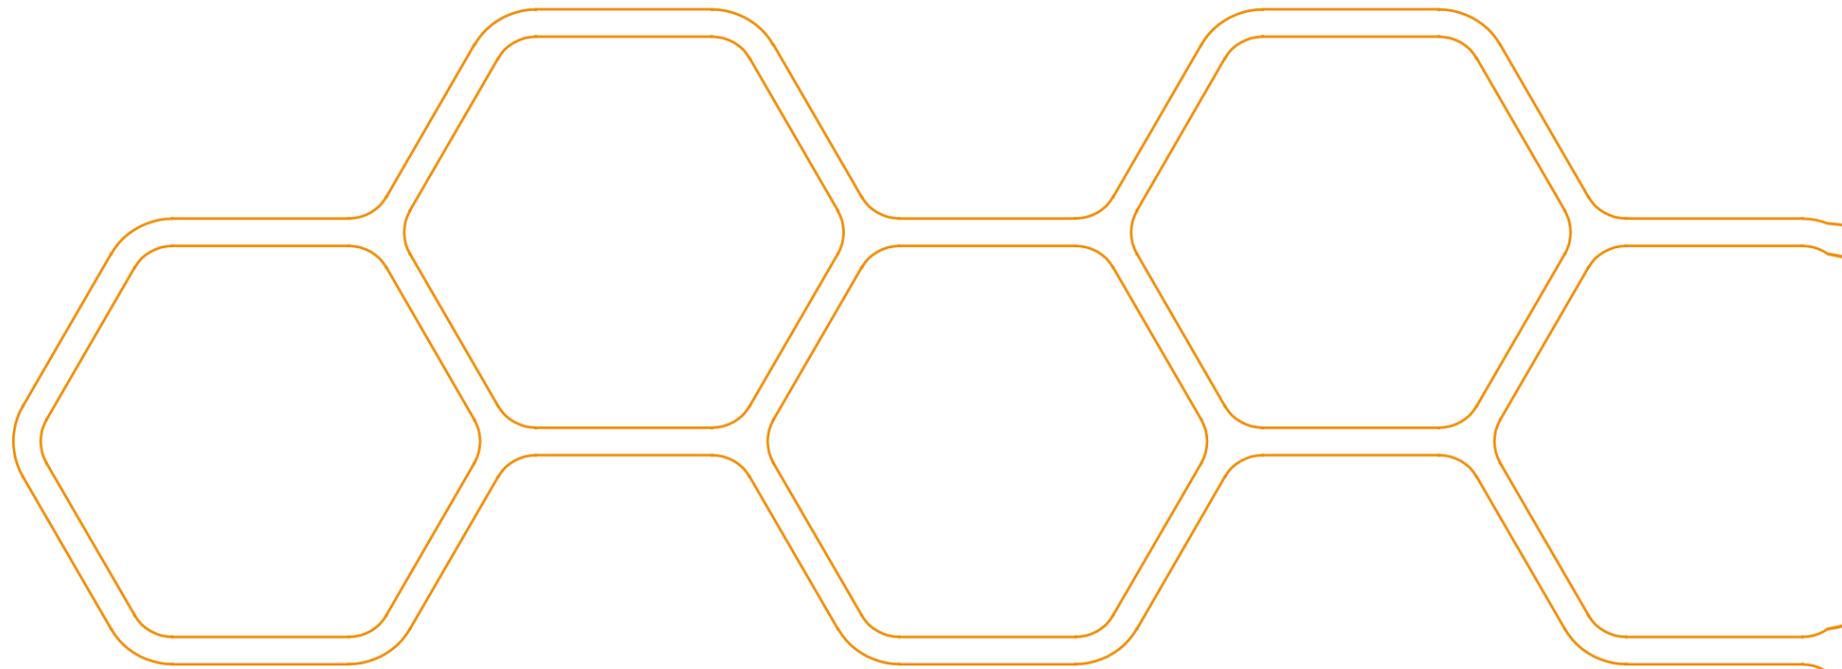

- 1 HEXAGON  
六边形 
- 2 TRIANGLE  
三角形 
- 3 CROSS TYPE  
十字形 
- 4 MOON LIGHT  
C字形 
- 5 HERRINGBONE  
人字形 
- 6 ROUND  
圆环形 
- 7 SQUARE  
正方形 


# HERIK SERIES

根据不同的场景需求和安装环境  
OFC可选用不同的结构实现：  
Different Types of Light Structure to Meet Different  
Architecture Application and Real Assembling  
Demand

 OFC专利产品

一代正压面罩系列 (面罩正面打开)


1st Generation—Patent Clip Design  
Making Diffuser Can Open from Top Side



 OFC专利产品


二代正压面罩系列 (面罩正面打开)

2nd Generation —Patent Clip Design  
Making Diffuser Can Open from Top Side





直压面罩系列 (面罩正面打开)

Thin Edge Structure Making Diffuser  
Can Open from Top Side






内压面罩系列 (适合W大尺寸)

Diffuser Inside Housing Making Wider  
Width Available

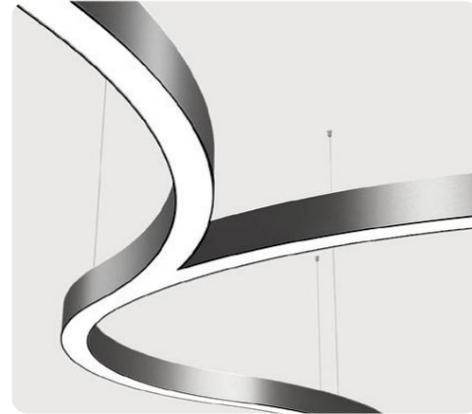

## Spliceable

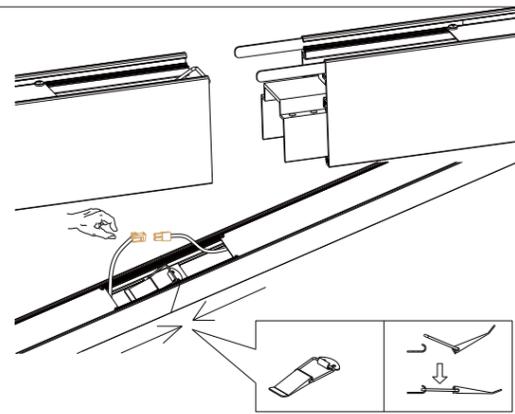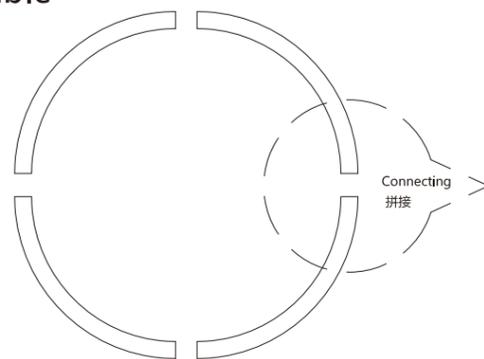

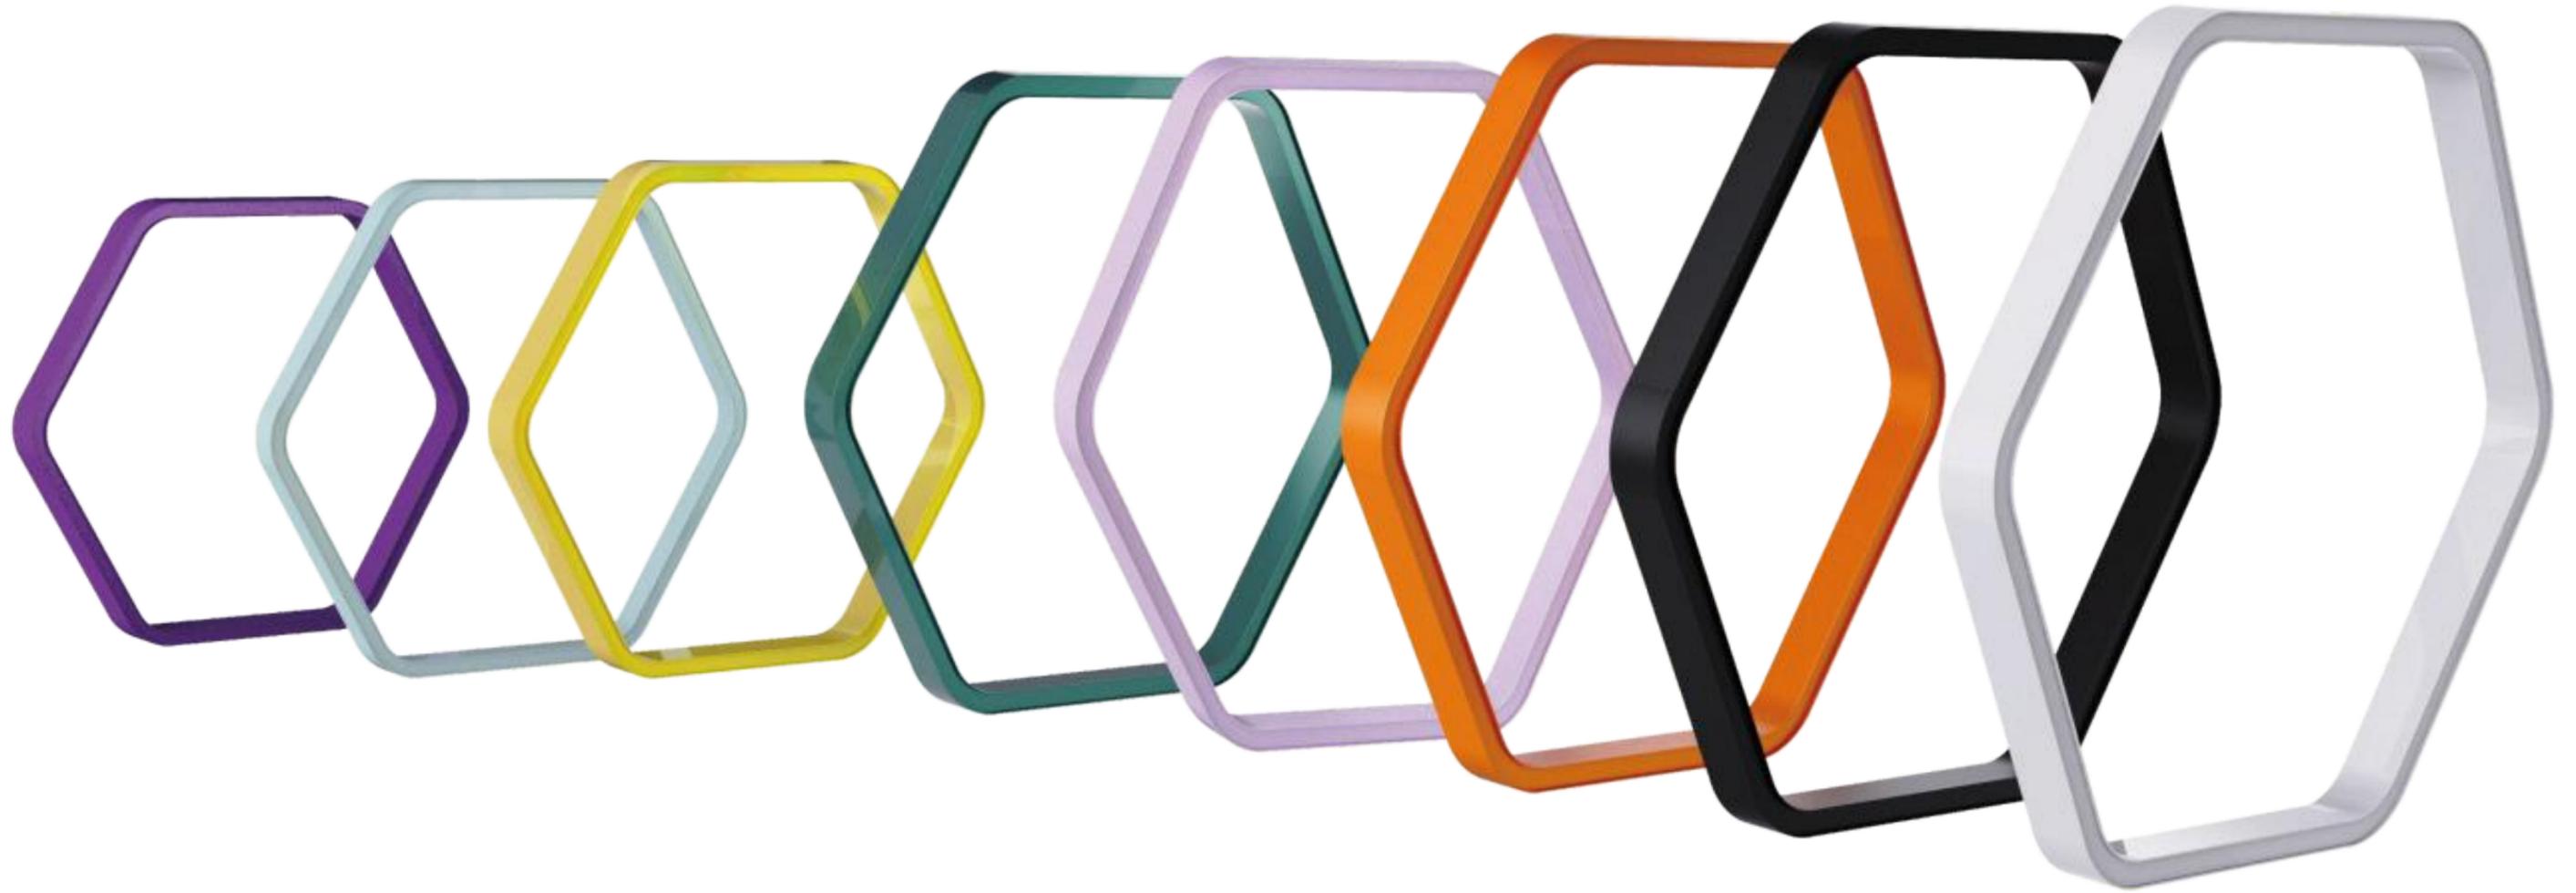

## HEXAGON-HARMONY SERIES


适用于商业、办公室、会议室、休闲区、网吧、餐厅等场所。  
随意造型组合拼接，发挥你的风格。


Suitable for commerce, offices, meeting rooms, leisure areas, Internet cafes, restaurants and other random modeling combination and splicing to play your style.

### LIGHT DISTRIBUTION




### HEXAGON-HARMONY SERIES PRODUCT SPECIFICATION


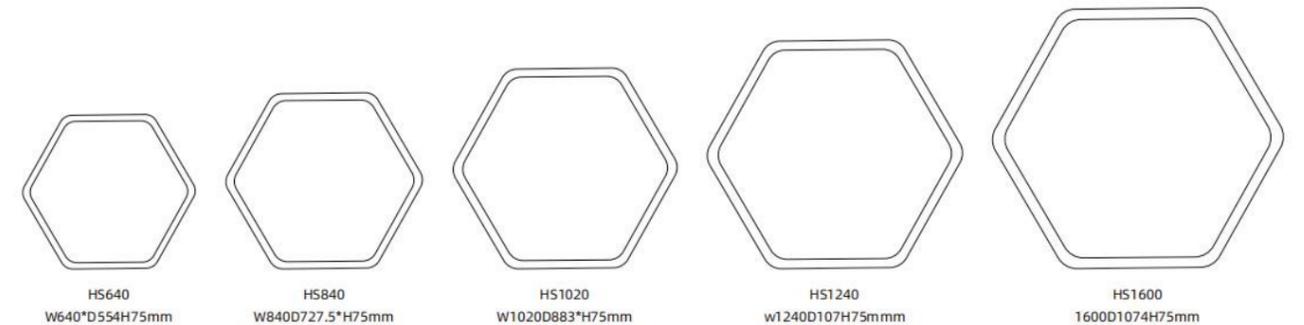


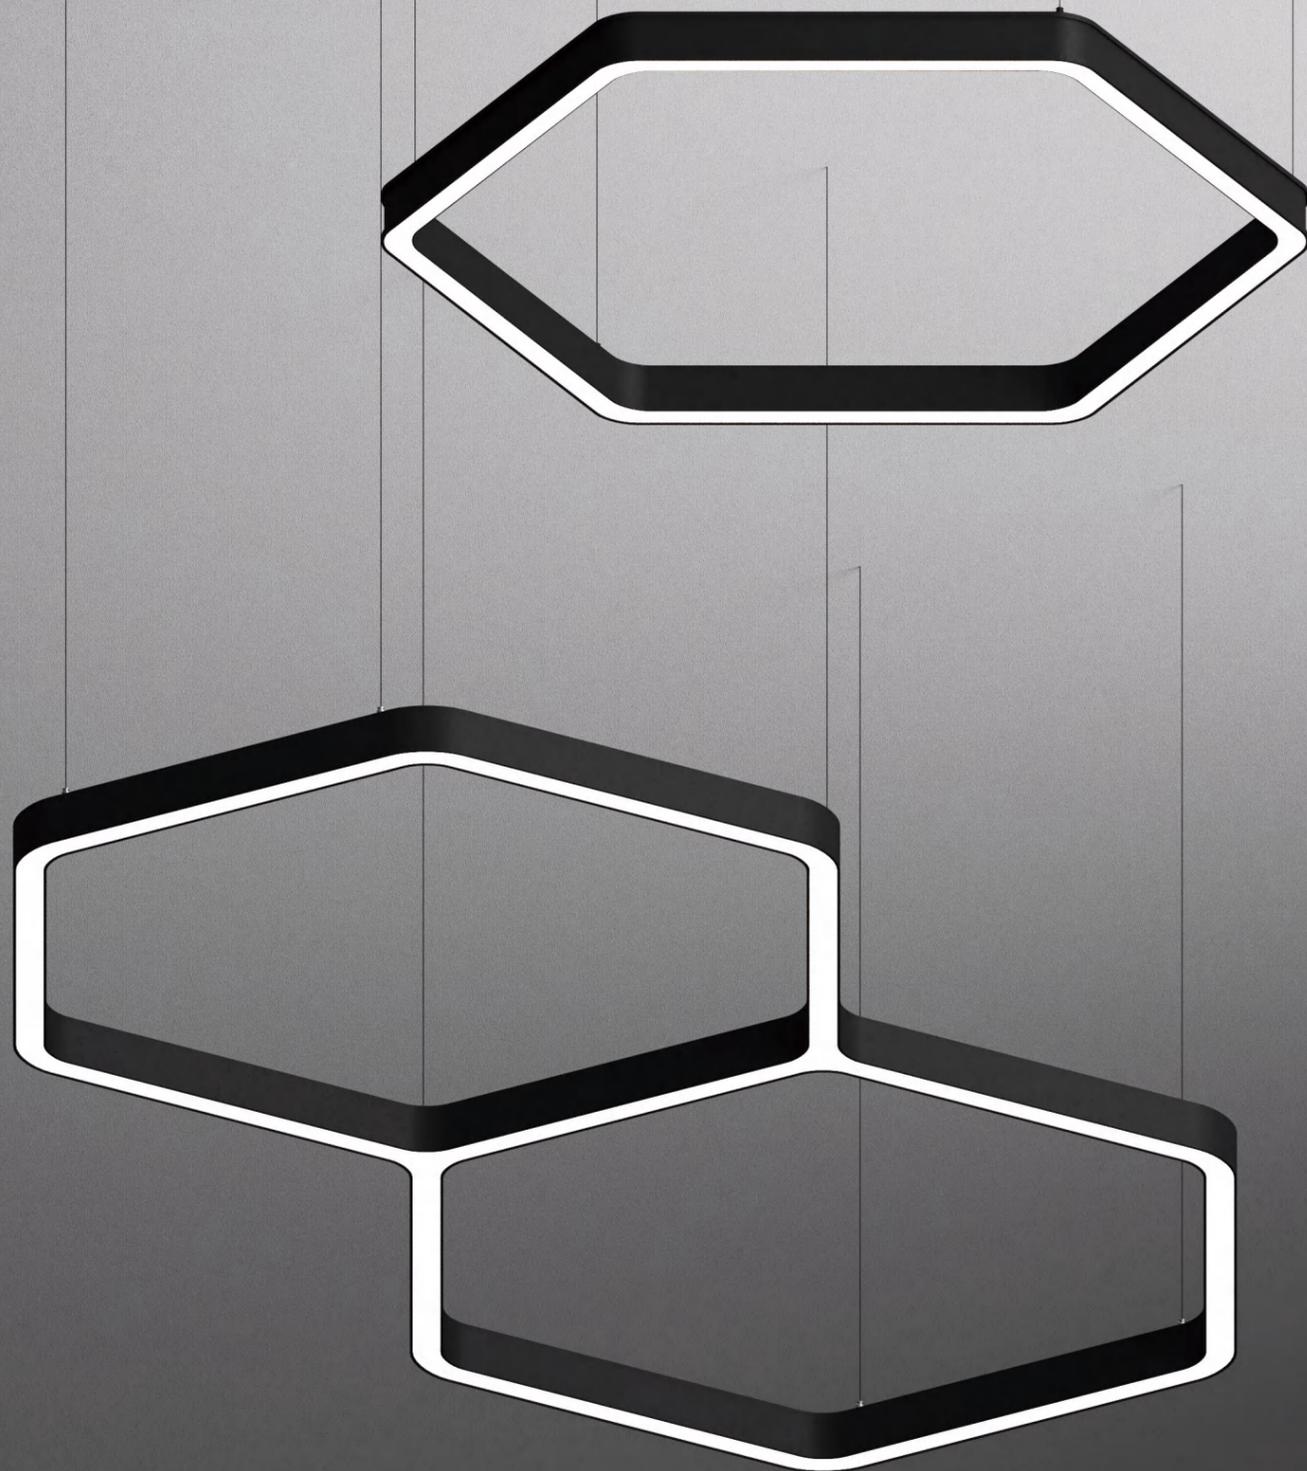

KD064 

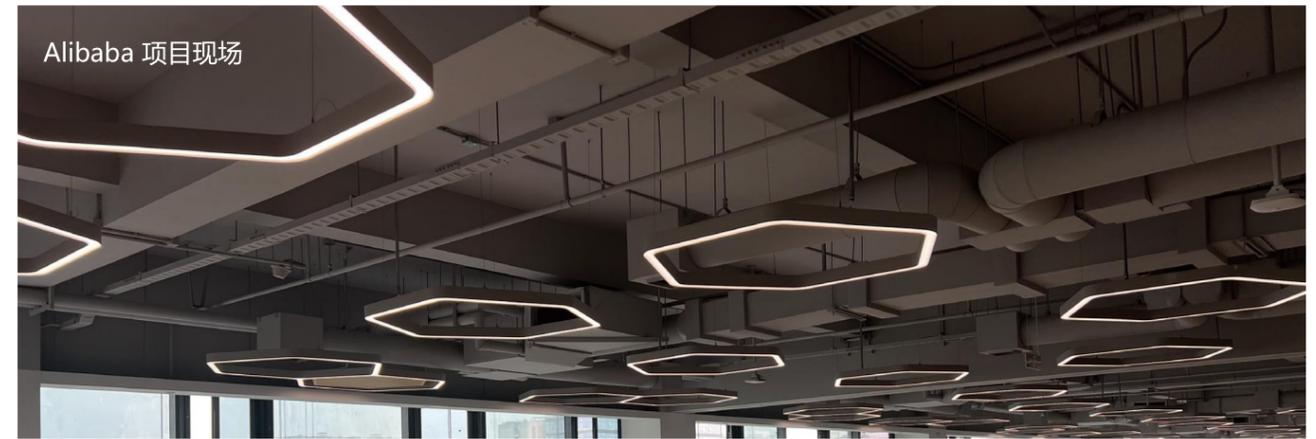


POWER	FLUX	SIZE	BEAM ANGLE
25W/M	> 95 lm/W	L×W54×H75mm	110°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	3000k/4000k/6000k		

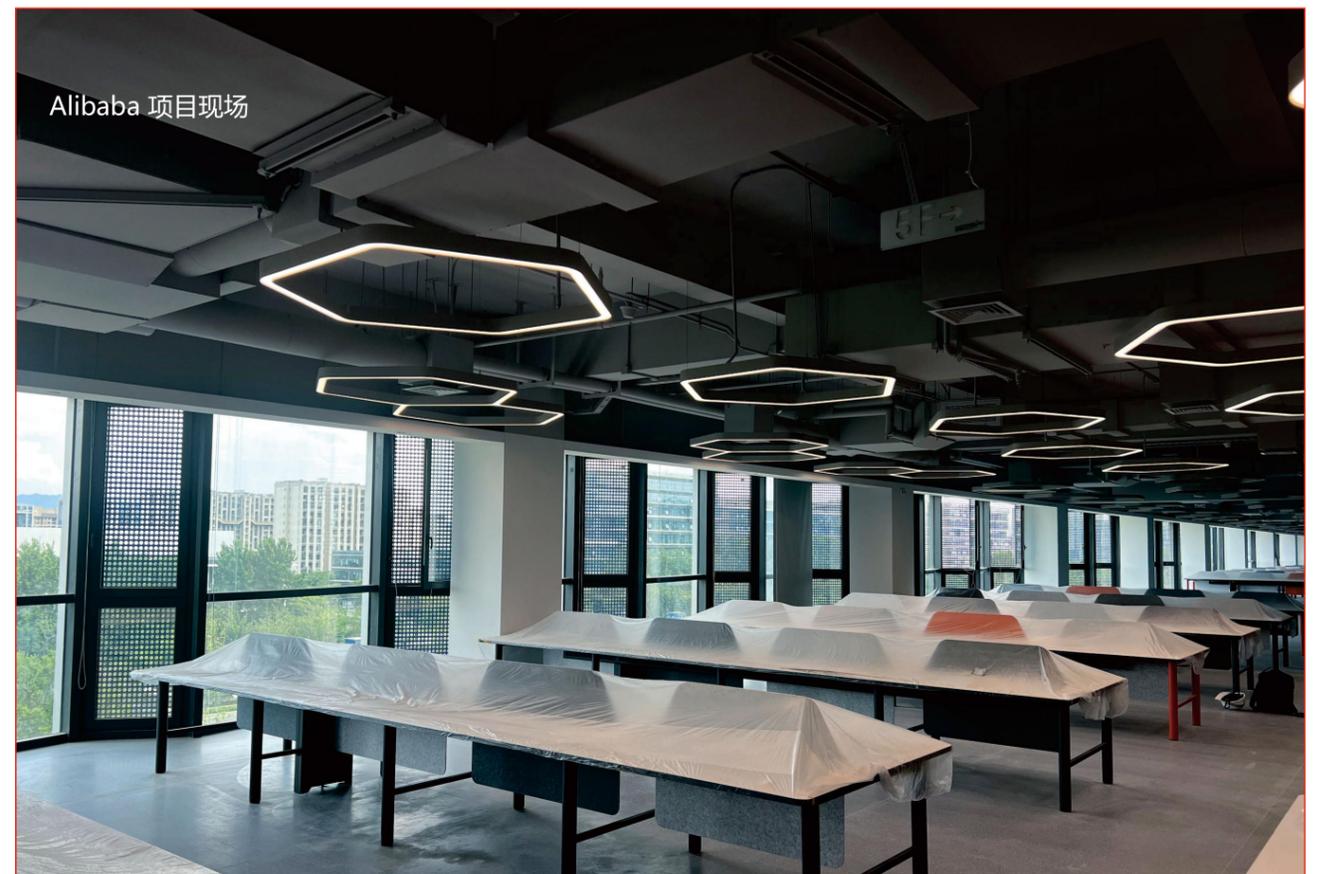




interact 智慧工业

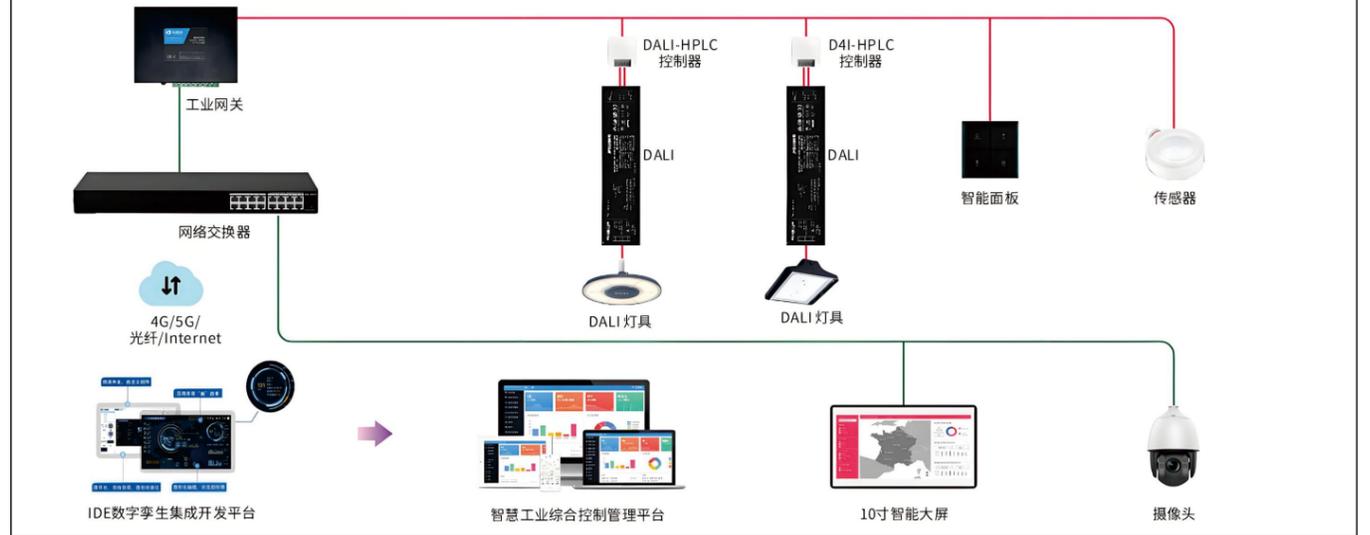

intreact 智慧工业

新能源汽车智能照明解决方案  
New Energy Vehicles Intelligence Lighting Package Solutions

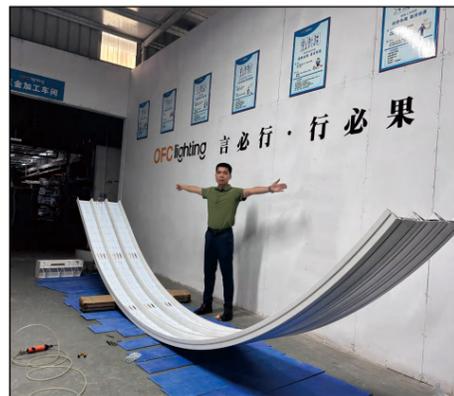




# WIP PLUS

## 维普PLUS·吊装办公照明

可以通过灯的传感器轻松滑动手来执行、无接触地切换功能，匹配不同的空间场景，明暗亮度和色温是同步调整的。

You can easily slide your hand through the light sensor to switch functions without contact, match different space scenes, and adjust the brightness and color temperature synchronously.

### INSTALLATION MODE




### LIGHT DISTRIBUTION



灵活调节吊线长度

无论是在房间里还是桌子上方：由于独特的高度调节功能，它可以轻松方便地进行调节。一拉一按，灵活调节高度距离，满足不同户型、层高需求。


Whether in the room or above the table: due to the unique height adjustment function, it can be adjusted easily and conveniently. Pull and press to flexibly adjust the height distance to meet the needs of different house types and floor heights.

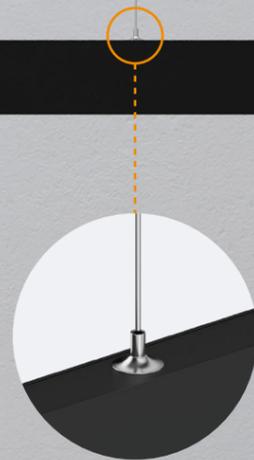


按压式锁线器卡扣



人体感应器  
(手扫开关, 感应距离为3-5cm)




拨码开关调温  
(3000K/4000K/开关灯)

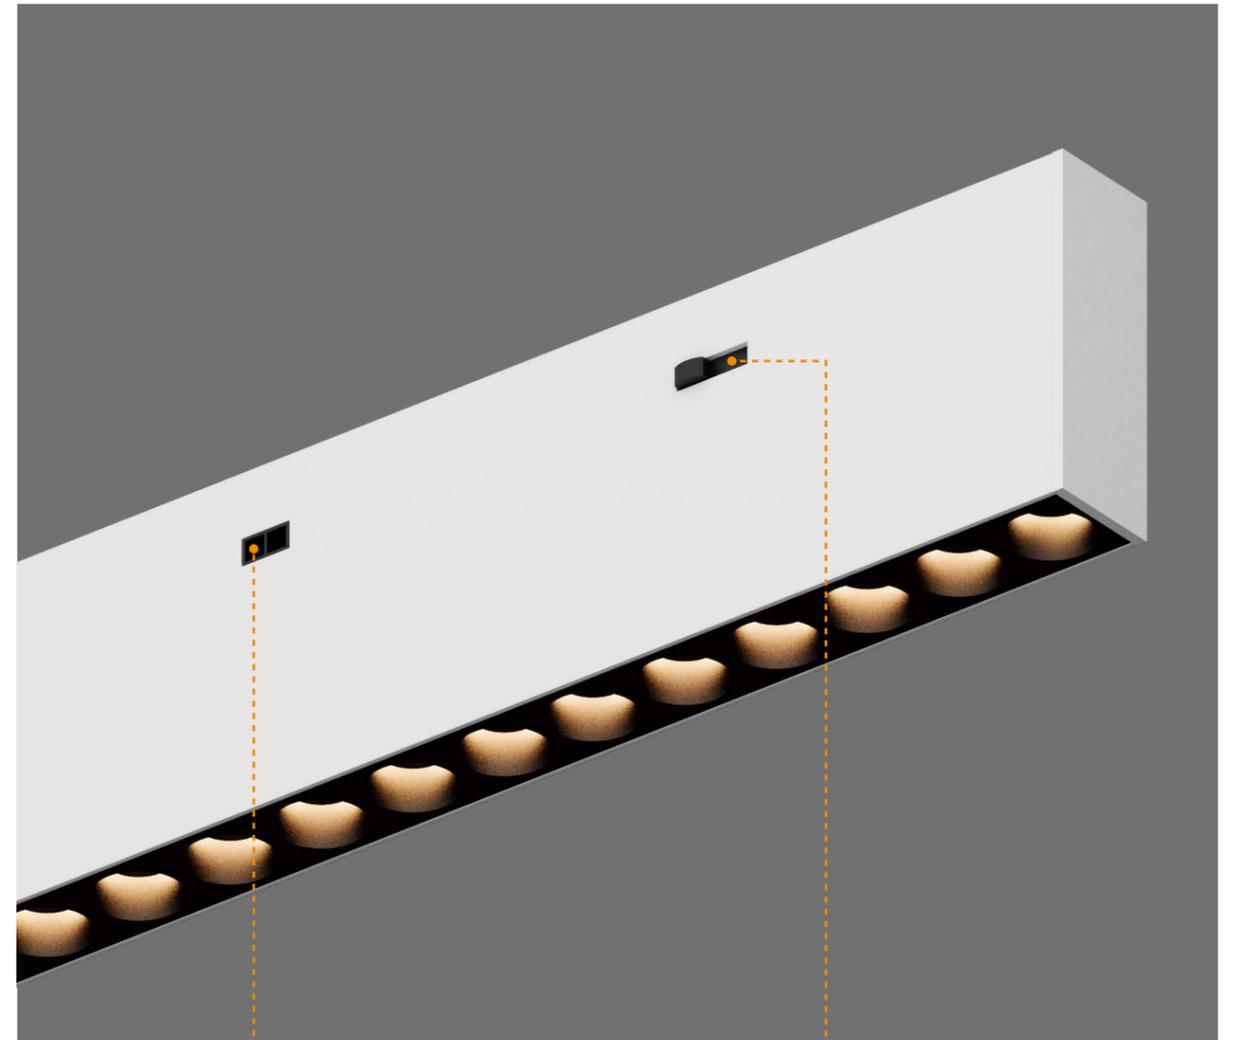



  
  
**手扫无极调光**  
 (在感应区停留为无极调光)

## KD7024

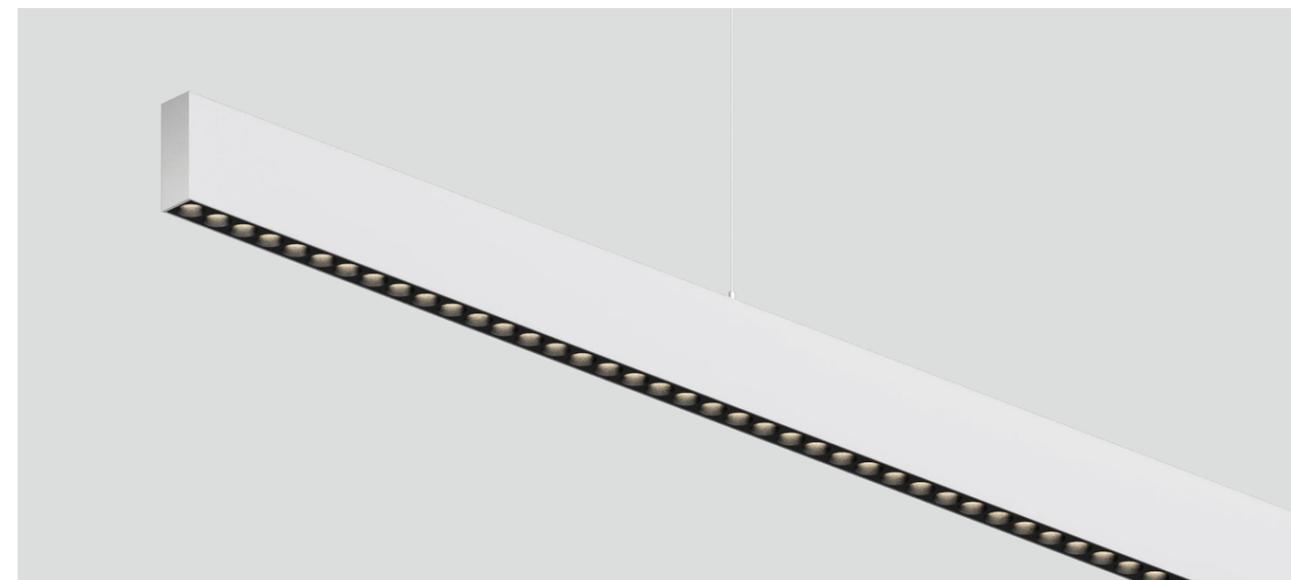

### PRODUCT PARAM ETER

POWER	34W
FLUX	> 80 lm/W
SIZE	L1185×W60×H1000mm
CCT	3000k/4000k
BEAM ANGLE	30°


### TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	/
END CAP MATERIAL	6063 Aluminum
LAMP BODY COLOR	 BG SB SW WG


1



### PHOTOMETRIC

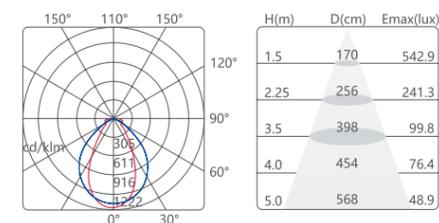

### LINE SKETCH

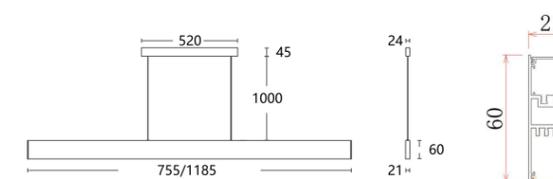



使用场景

适用于办公室、书房、会议室、公共建筑、图书馆等



堵头为新型双层堵头设计，采用磁吸固定方式，并且可以起到防止灯具漏光的现象。

The plug is a new double-layer plug design, using magnetic fixation, and can prevent the phenomenon of light leakage.

### 堵头可定制颜色 Customizable Color for Endcaps





L1

奶白棱晶罩


L2

内半透亚克力+外全透棱晶罩

灯具可做双层面罩，采用内扩散+外棱晶面罩结合，达到UGR防眩效果

Lamps can be double-layer masks using the combination of internal diffusion + outer edge crystal mask to achieve UGR anti-glare effect

KD906-L

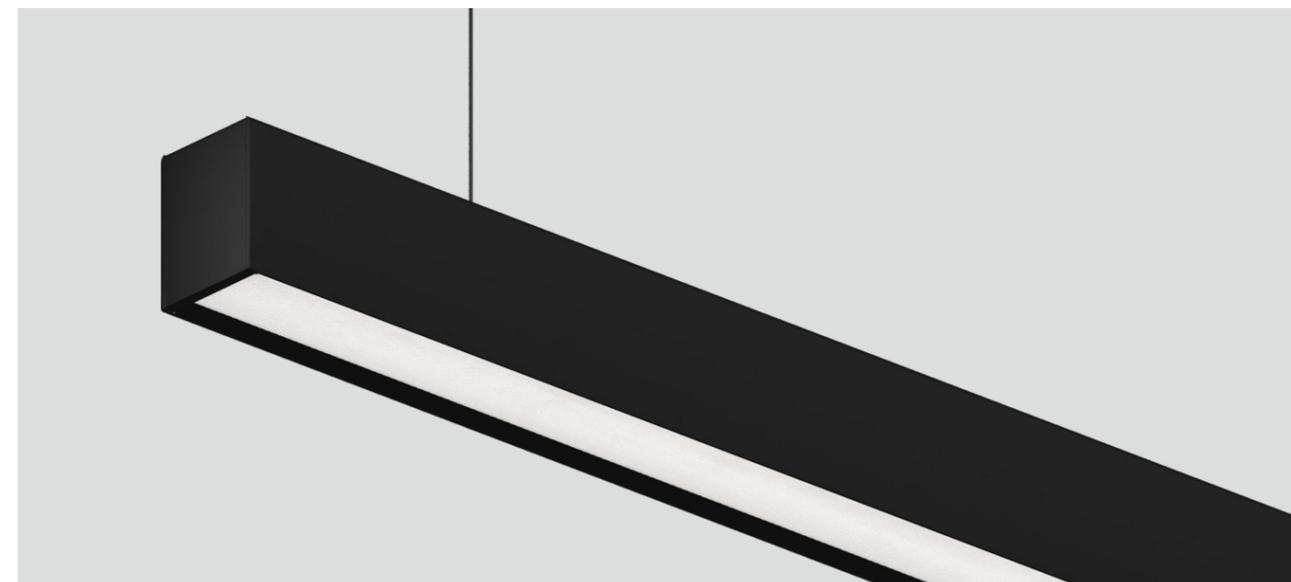


PRODUCT PARAMETER


POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W75×H95mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

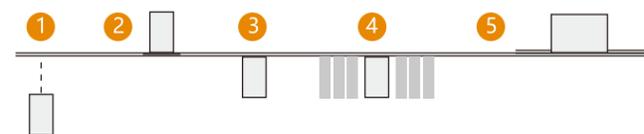


PHOTOMETRIC

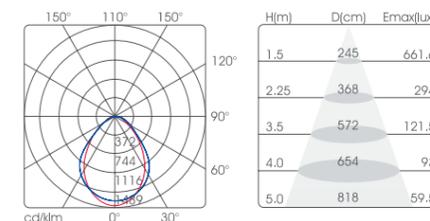



LINE SKETCH

KD906-L1



KD906-L2



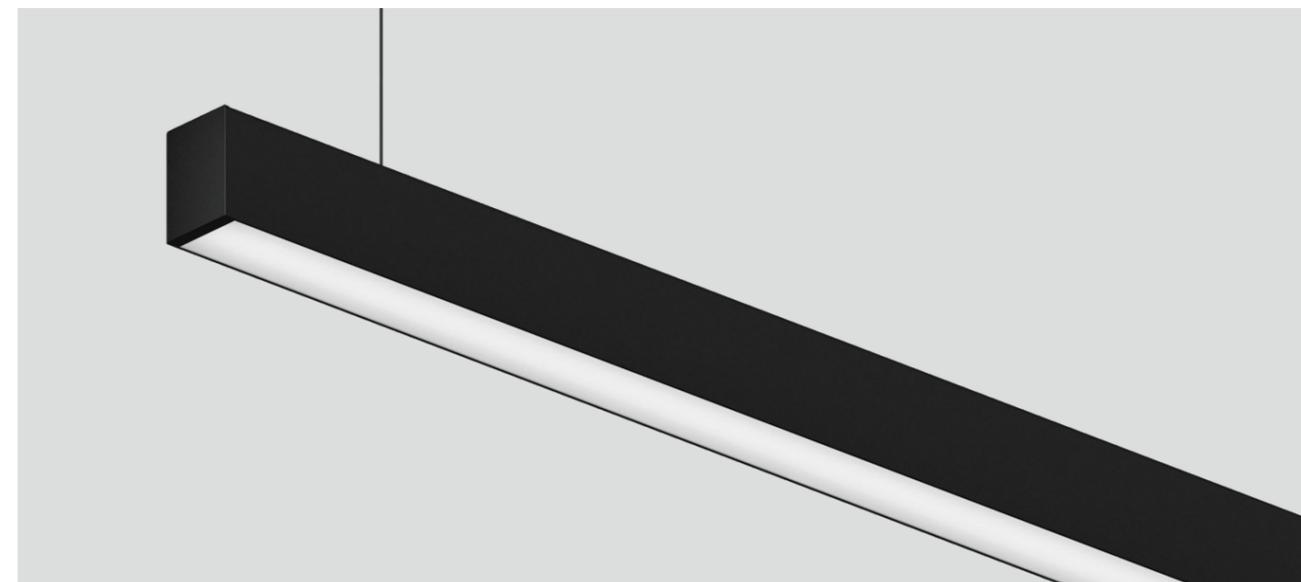


PRODUCT PARAM ETER


POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W60×H82mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	 MB MW SR SB SW WG

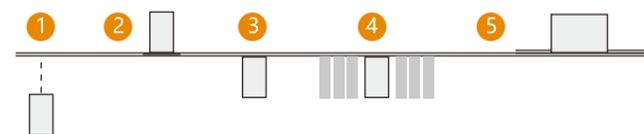


PHOTOMETRIC

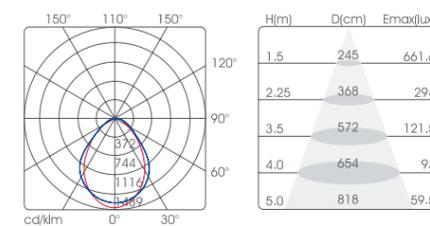


LINE SKETCH

KD934-L1




KD934-L2



# WIP-PLUS<sub>SERIES</sub>

KD935-L

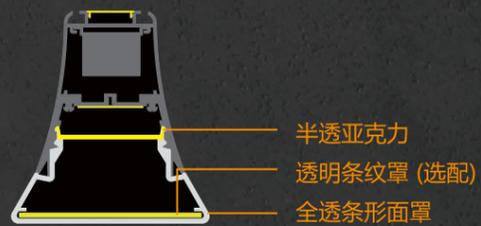

灯具可以实现上下发光，为双面罩组合 (内扩散面罩+外条纹罩)，外条纹罩为凸罩可实现三面透光，根据需求可选配增加一层横向条纹罩 (由条形光斑改为方形光斑)

The lamp can achieve up and down light, double mask combination (internal diffusion mask + outer stripe cover), the outer stripe cover is convex cover to achieve three sides of light transmission, optionally add a layer of horizontal stripe cover according to demand (from strip spot to square spot)




OFC专利产品

PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W103.5×H110mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	 MB MW SR SB SW WG

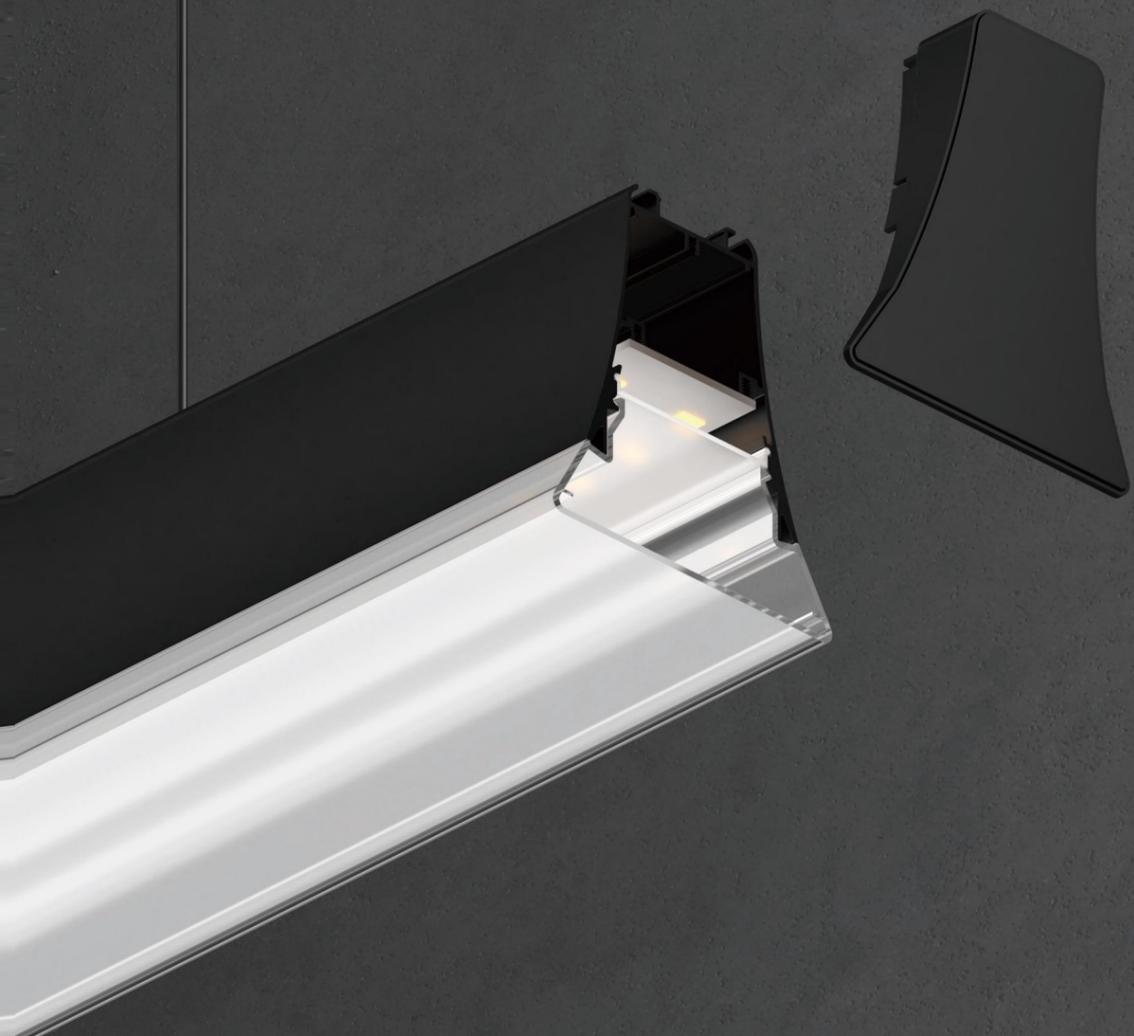


1



PHOTOMETRIC

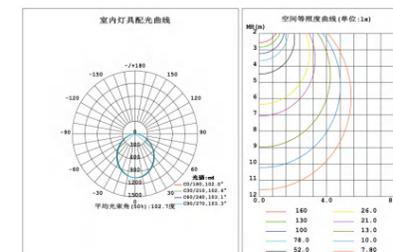

LINE SKETCH

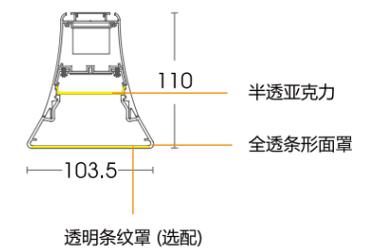



KD6060



PRODUCT PARAM ETER

POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W103.5×H110mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°


TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	


1



PHOTOMETRIC



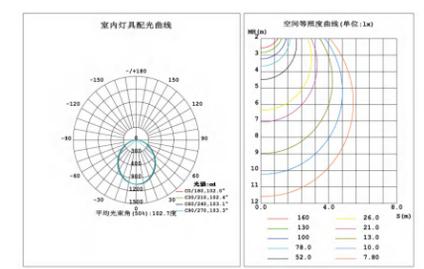


LINE SKETCH



# WIP-PLUS SERIES

KD933-L / KD15060-L

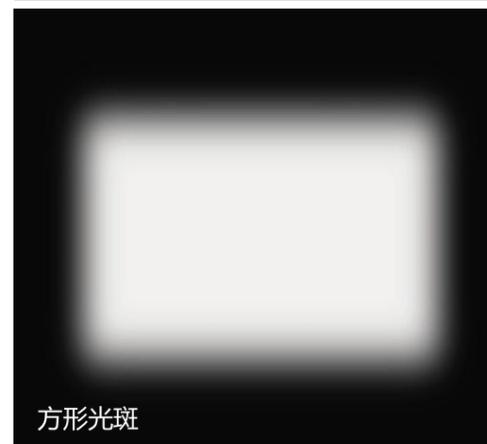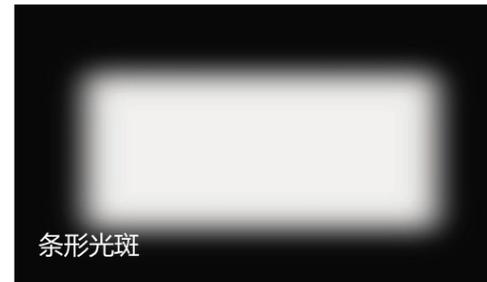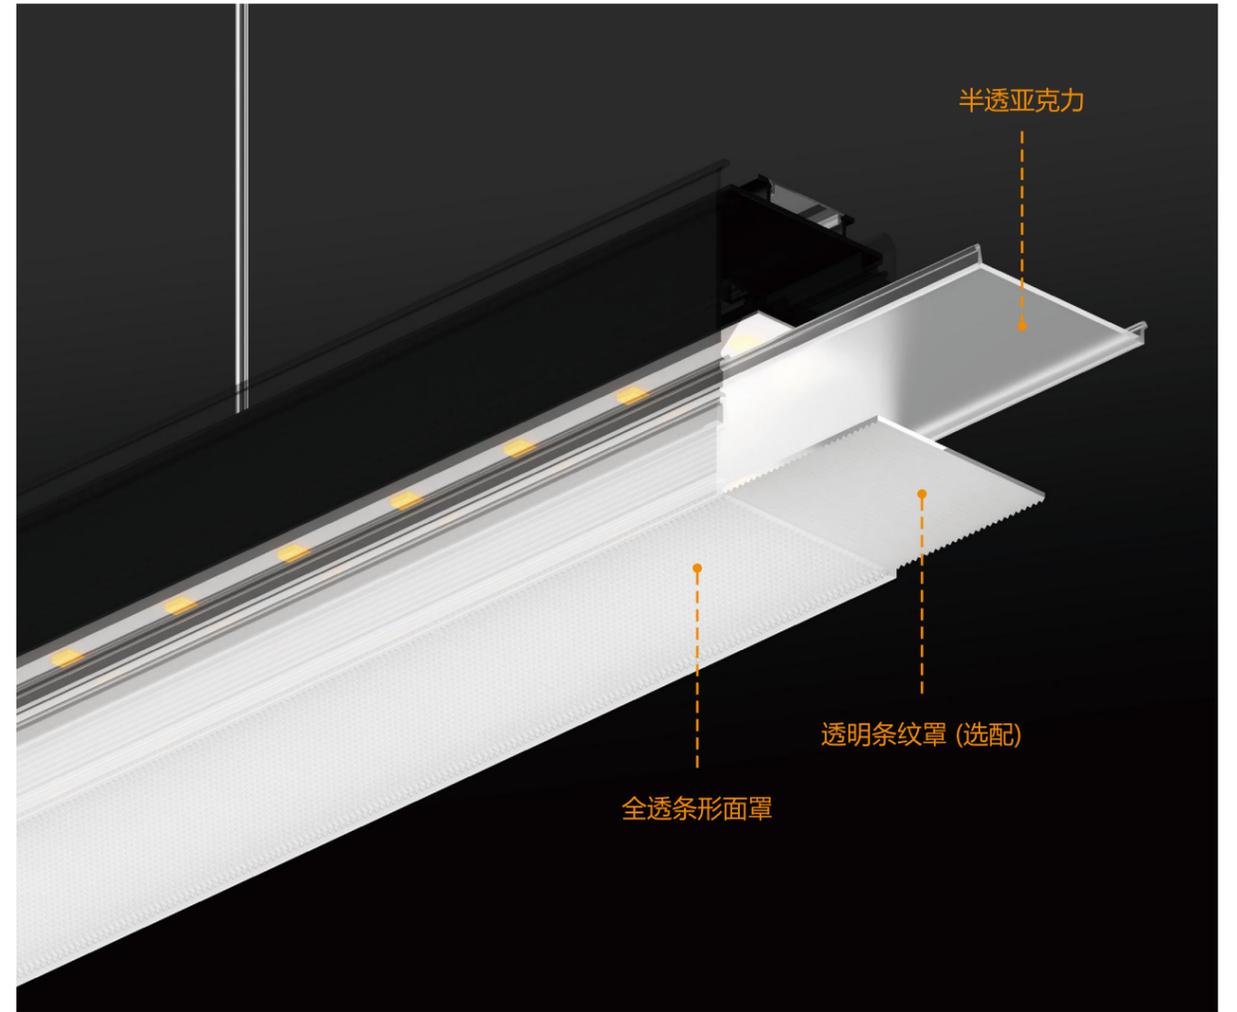

灯具可以实现上下发光，为双面罩组合 (内扩散面罩+外条纹罩)，外条纹罩为凸罩可实现三面透光，根据需求可选配增加一层横向条纹罩 (由条形光斑改为方形光斑)

The lamp can achieve up and down light, double mask combination (internal diffusion mask + outer stripe cover), the outer stripe cover is convex cover to achieve three sides of light transmission, optionally add a layer of horizontal stripe cover according to demand (from strip spot to square spot)




PRODUCT PARAM ETER


POWER	25W/M
FLUX	95-105 lm/W
SIZE	L×W60×H90mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

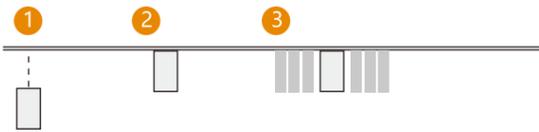

PHOTOMETRIC

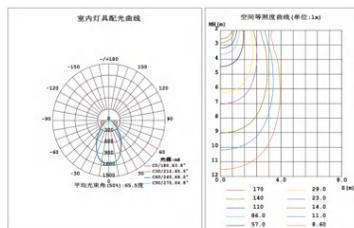

LINE SKETCH




PRODUCT PARAM ETER


POWER	38W/M
FLUX	100-115 lm/W
SIZE	L×W150×H60mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

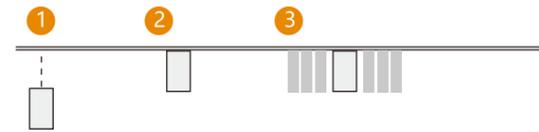

PHOTOMETRIC



LINE SKETCH

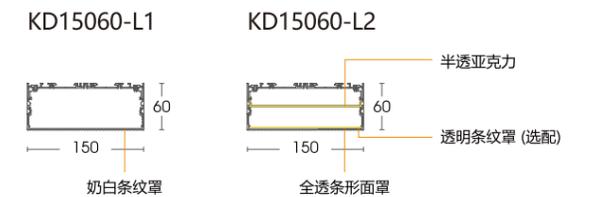




使用场景

适用于办公室、书房、会议室、公共建筑、图书馆等



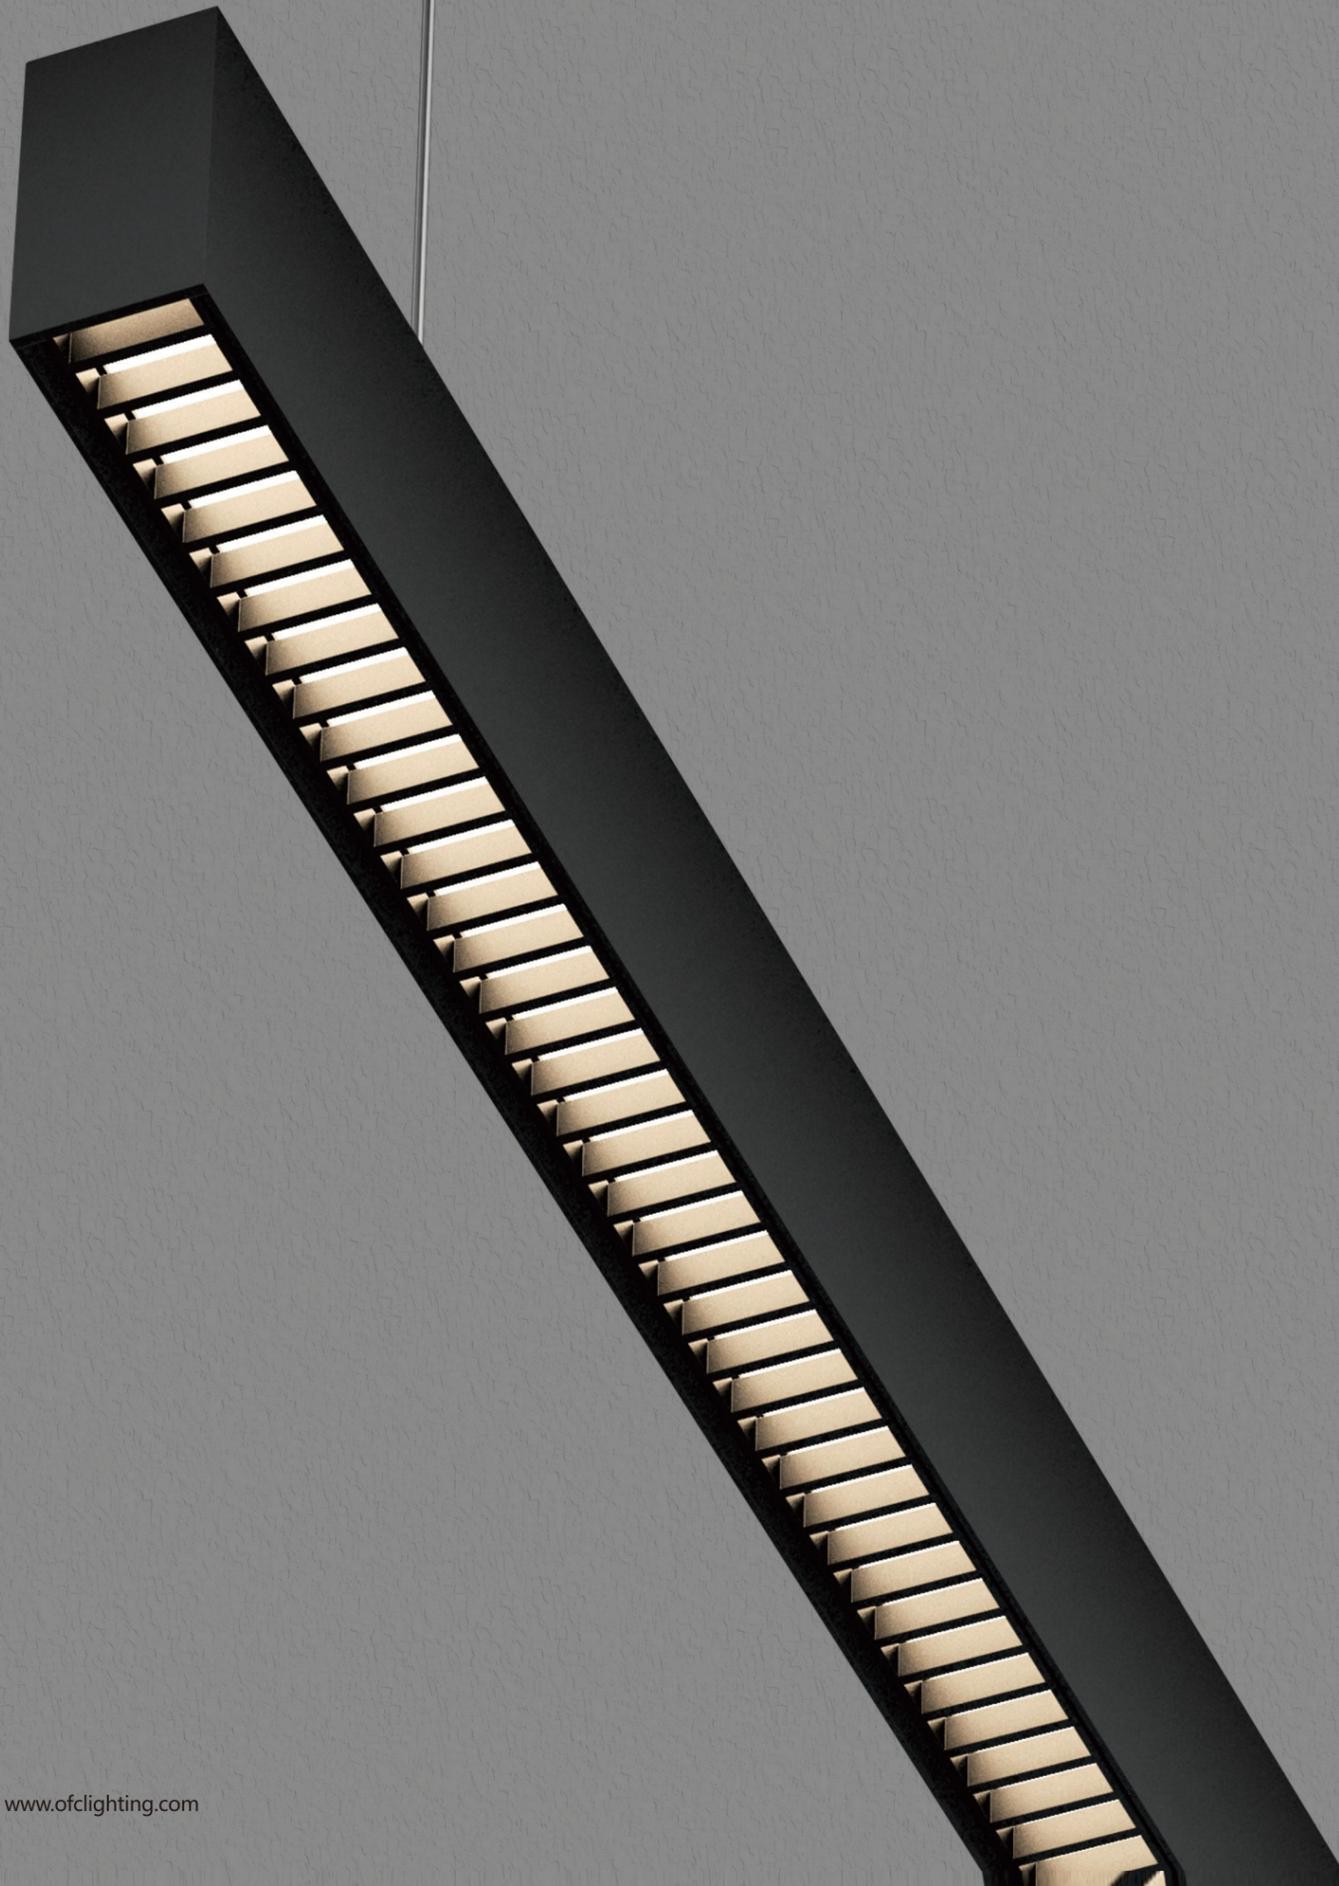


PRODUCT PARAM ETER


POWER	25W/M
FLUX	55-70 lm/W
SIZE	L×W46×H85mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

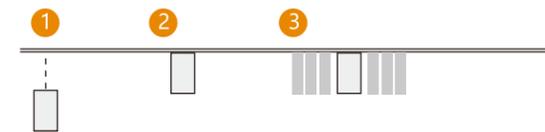

PHOTOMETRIC

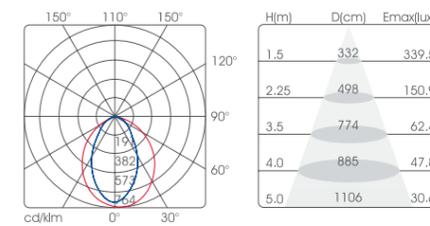


LINE SKETCH



# WIP-PLUS SERIES

## KD936-A


  
IP54

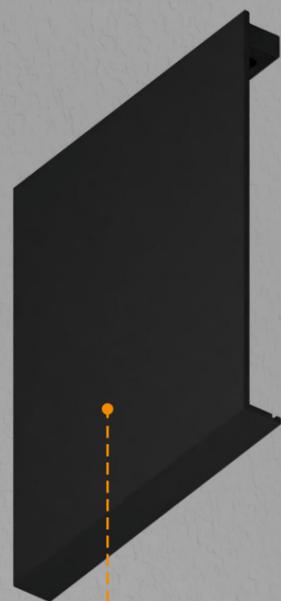


端盖



面罩卡扣

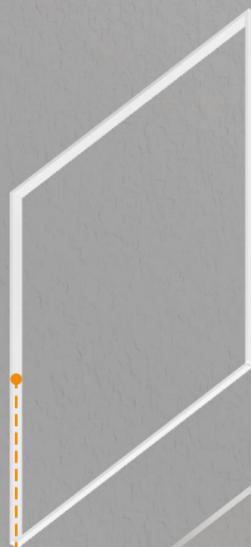

防水胶条

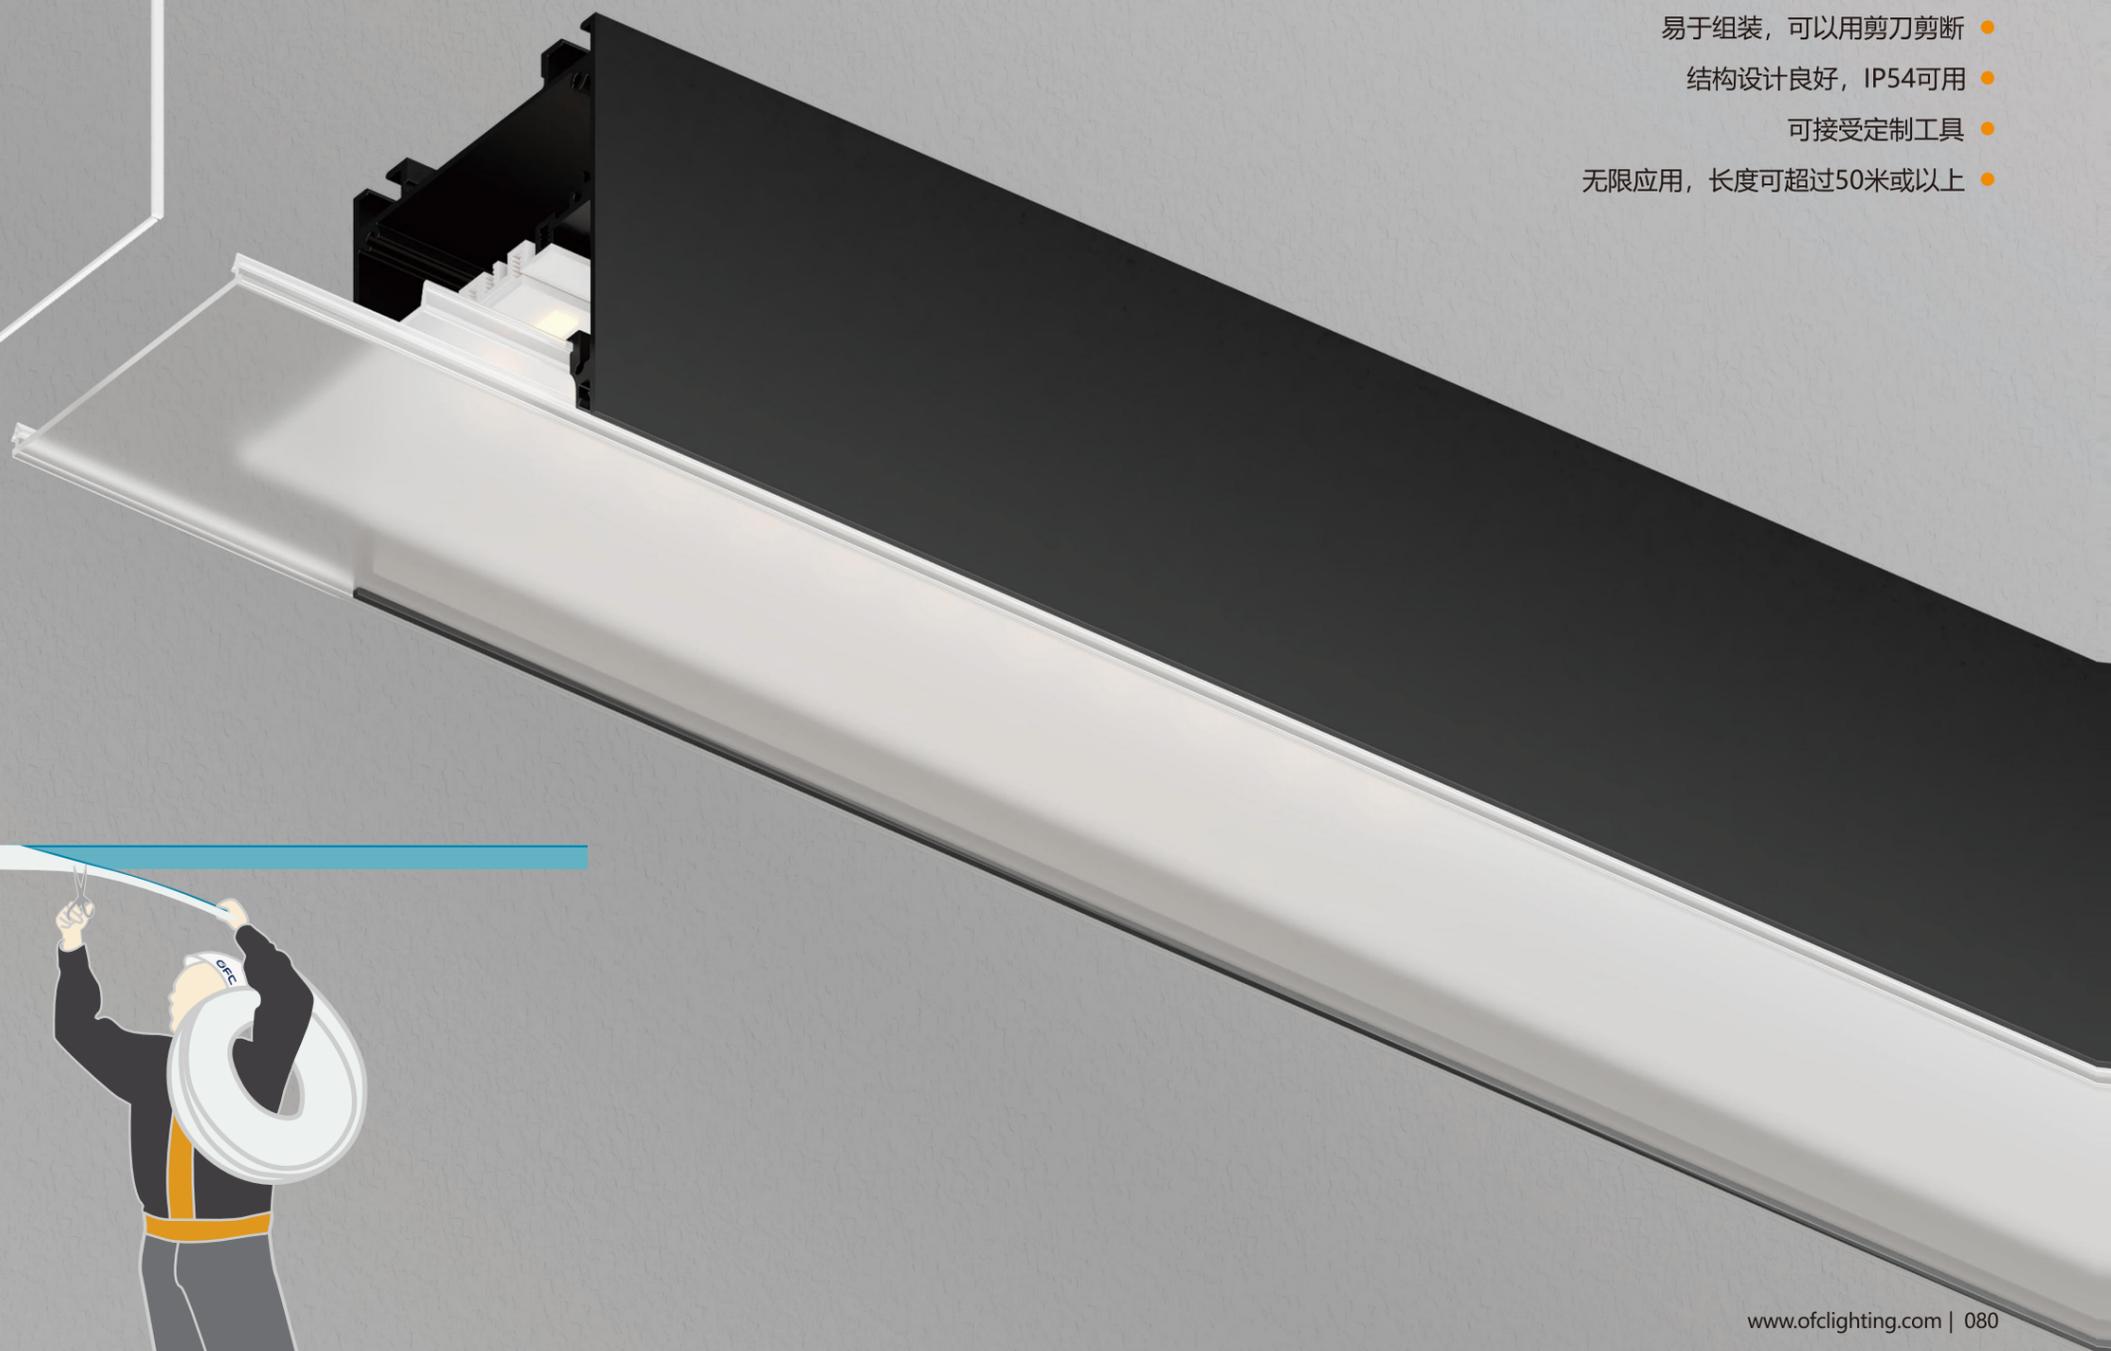


- 软胶条
- 易于组装, 可以用剪刀剪断
- 结构设计良好, IP54可用
- 可接受定制工具
- 无限应用, 长度可超过50米或以上



OFC项目案例：西安游泳馆



KD936-A

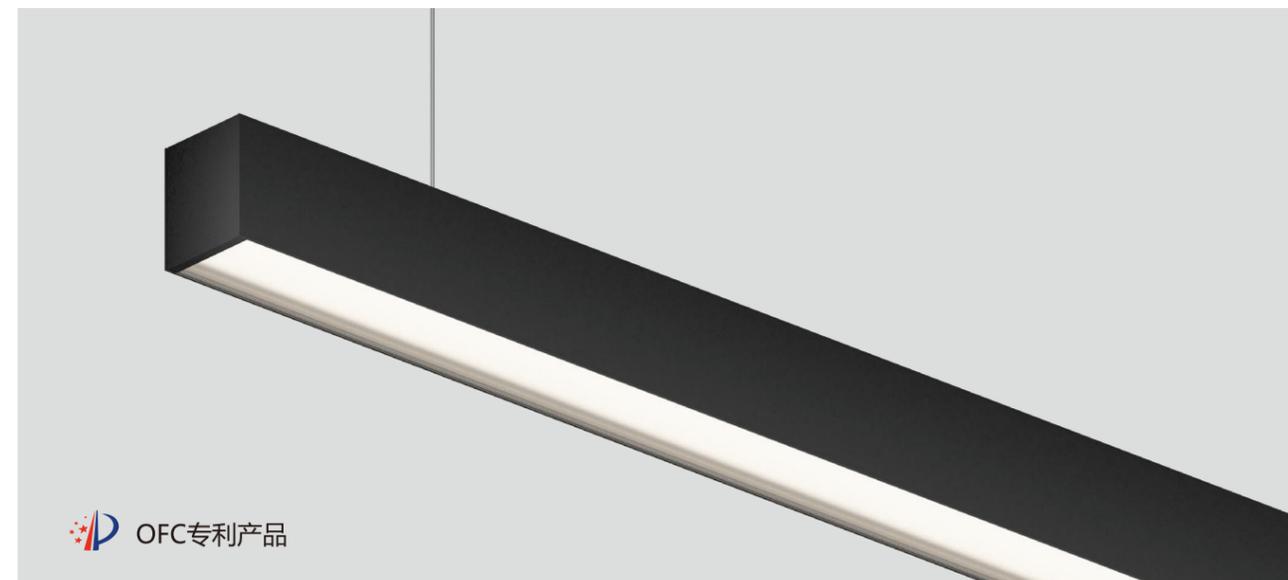


OFC专利产品

PRODUCT PARAM ETER


POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W71×H85mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

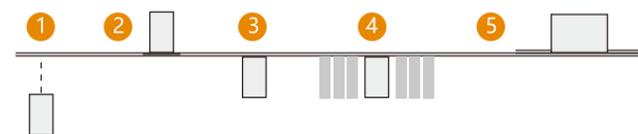

PHOTOMETRIC

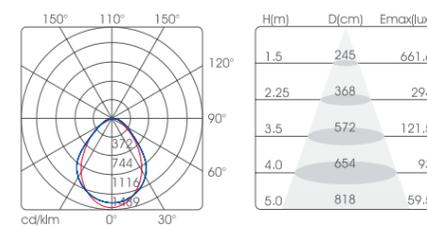

LINE SKETCH






KD940




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	80-95 lm/W	L×W46×H82mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
30M 卷面长度		3000k/4000k/6000k	






KD857

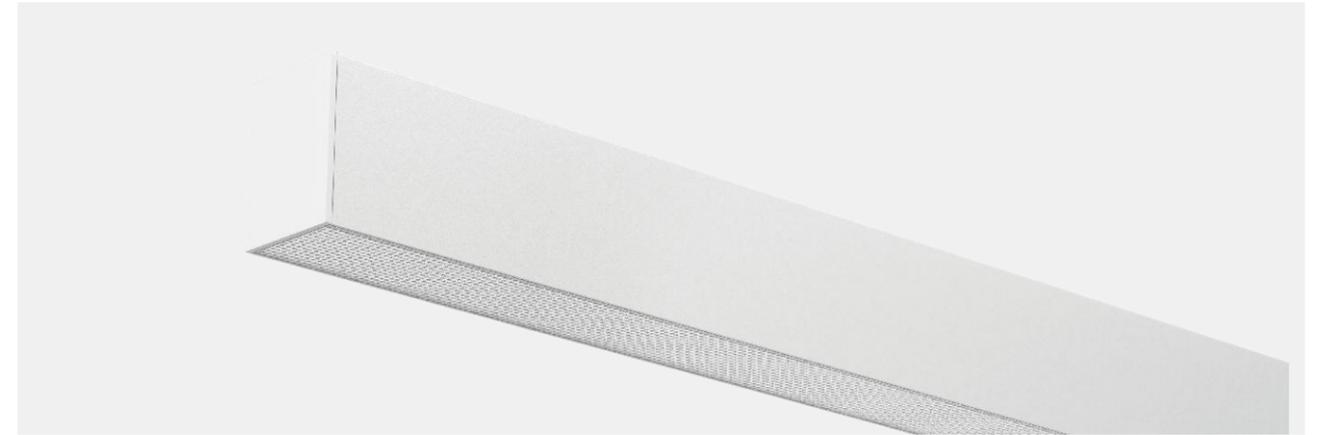


POWER	FLUX	SIZE	BEAM ANGLE
25W/M	80-95 lm/W	L×W50×H70mm	110°



ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR
-----------------------	-----	-----------------

30M 卷面长度


3000k/4000k/6000k

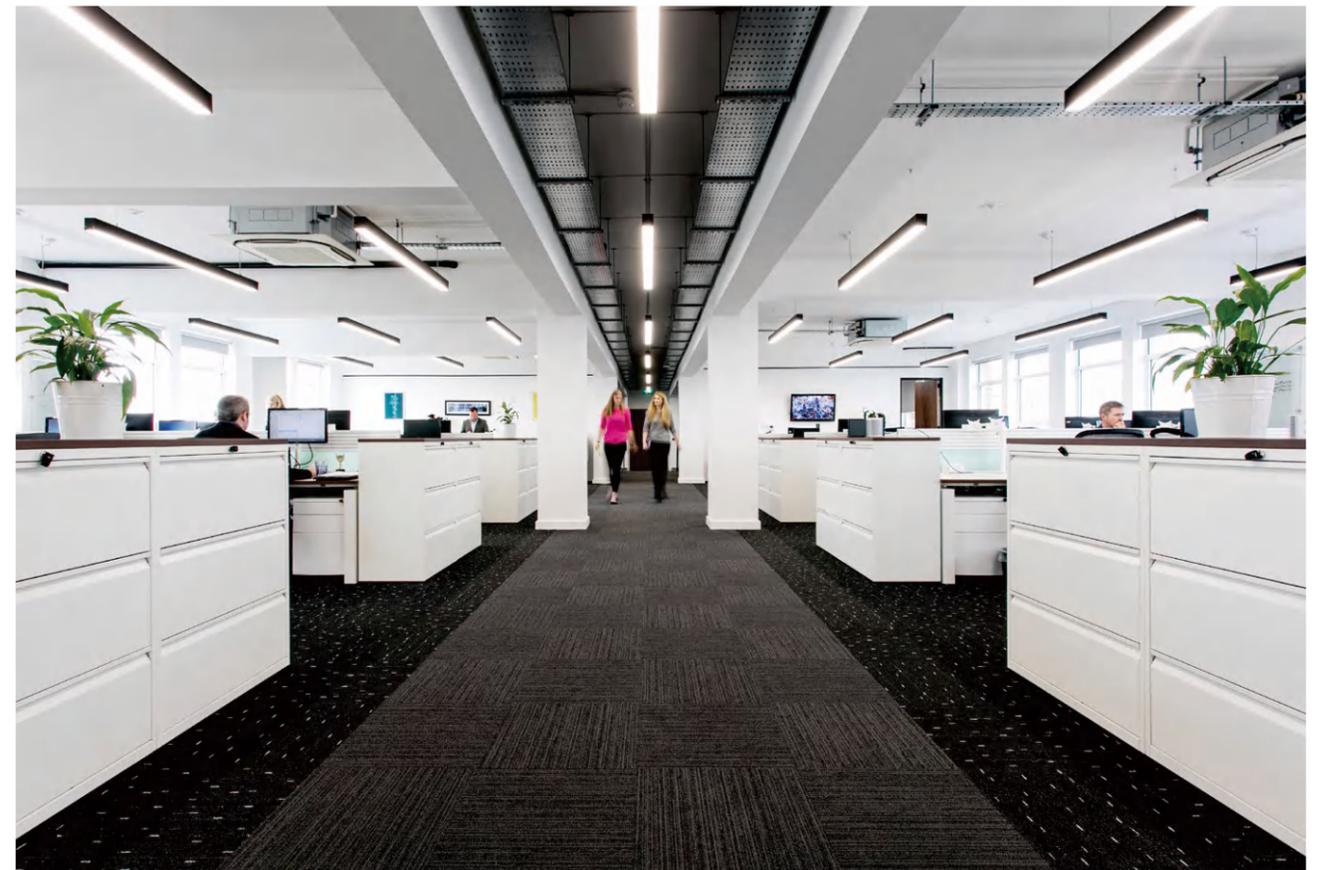



# WIP-PLUS<sub>SERIES</sub>

KD14845

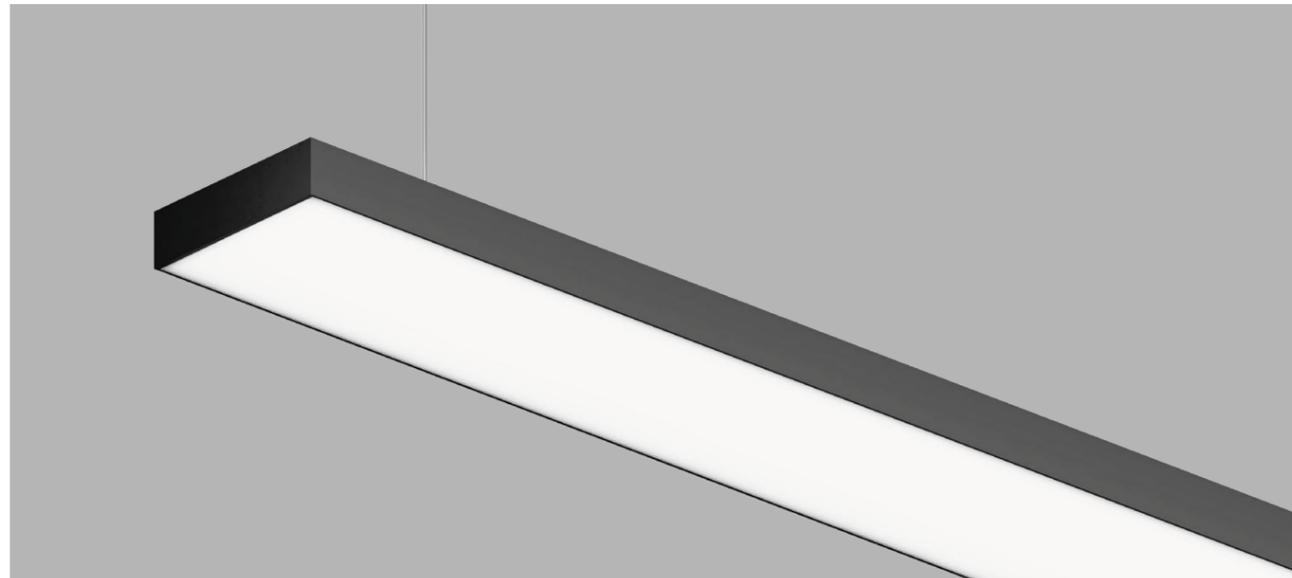


PRODUCT PARAM ETER


POWER	25W/M
FLUX	100-115 lm/W
SIZE	L×W98×H50mm L×W120×H50mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS



BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

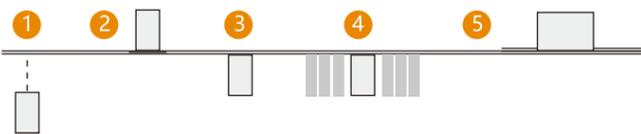

PHOTOMETRIC

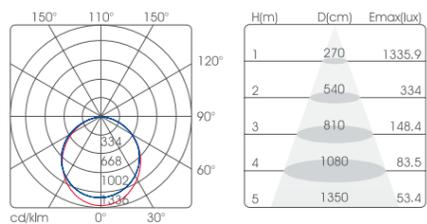

LINE SKETCH

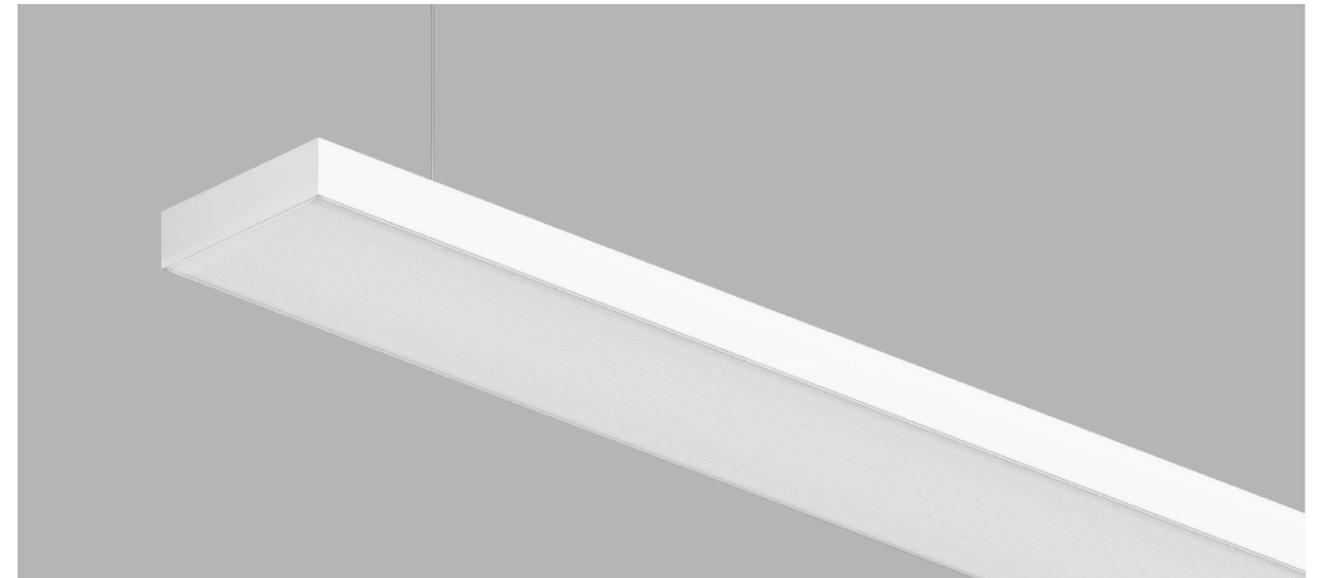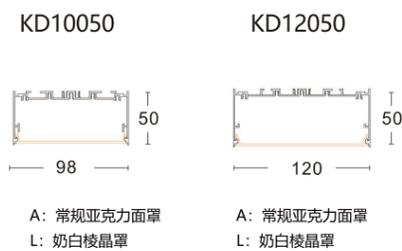


PRODUCT PARAM ETER


POWER	38W/M
FLUX	100-115 lm/W
SIZE	L×W148×H45mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

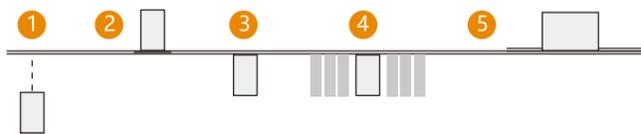


PHOTOMETRIC

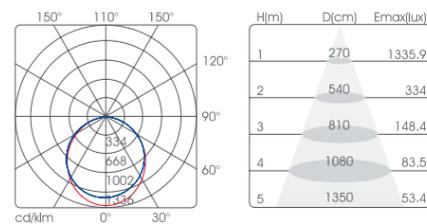

LINE SKETCH

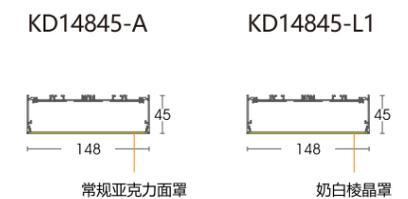

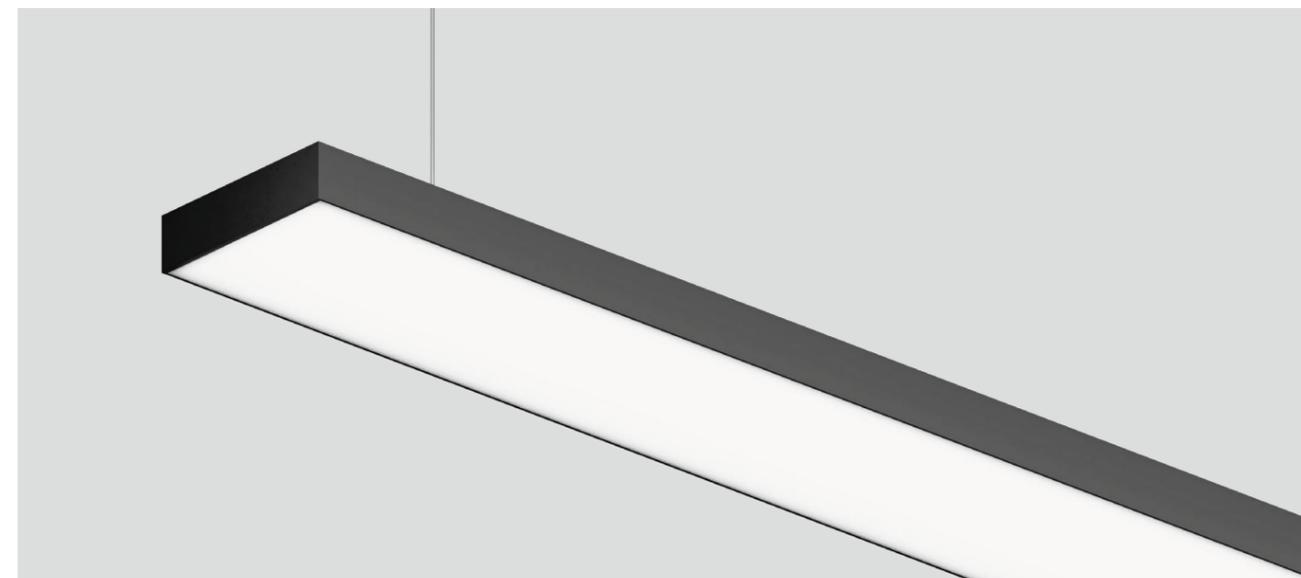

▲ L2  
内全透棱晶罩+外半透亚克力

▲ L1  
奶白棱晶罩


▲ A  
常规发光面罩

PRODUCT PARAM ETER


POWER	25W/M
FLUX	80-95 lm/W
SIZE	L×W150×H40mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

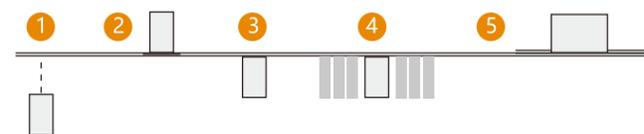


PHOTOMETRIC

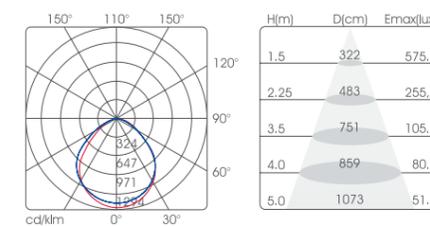

LINE SKETCH



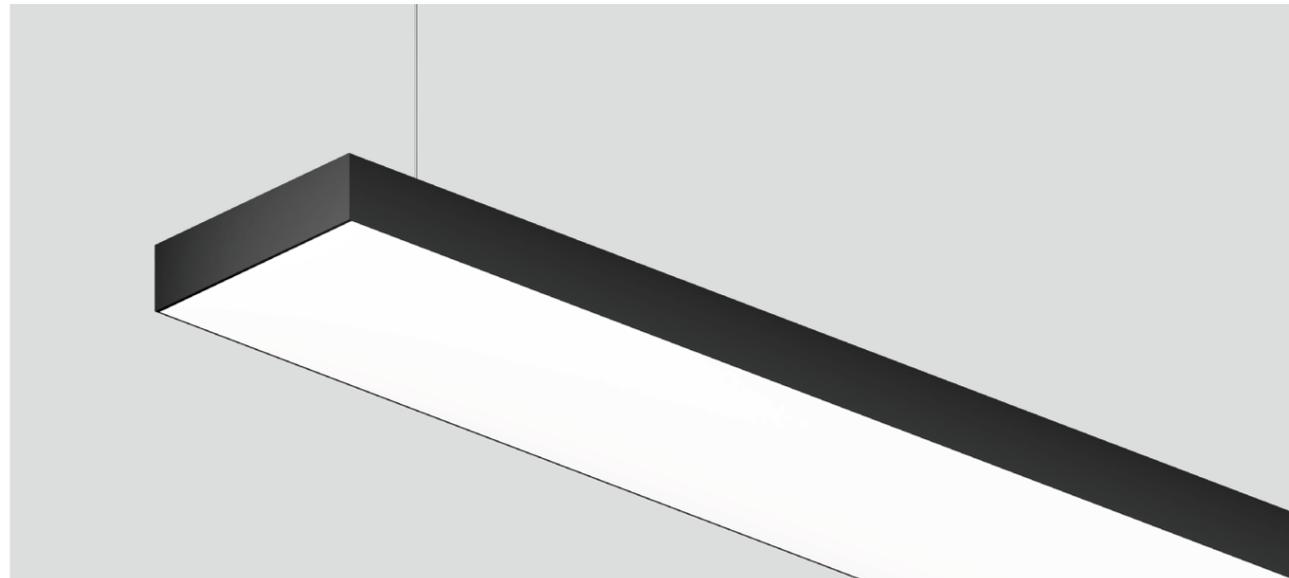


PRODUCT PARAM ETER


POWER	38W/M
FLUX	100-115 lm/W
SIZE	L×W200×H50mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS


BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	

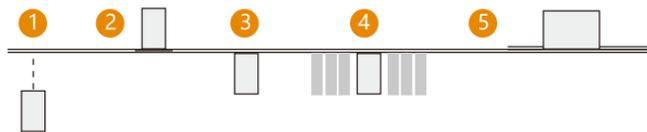


PHOTOMETRIC

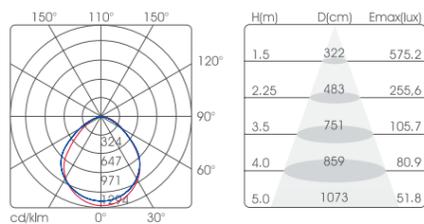

LINE SKETCH

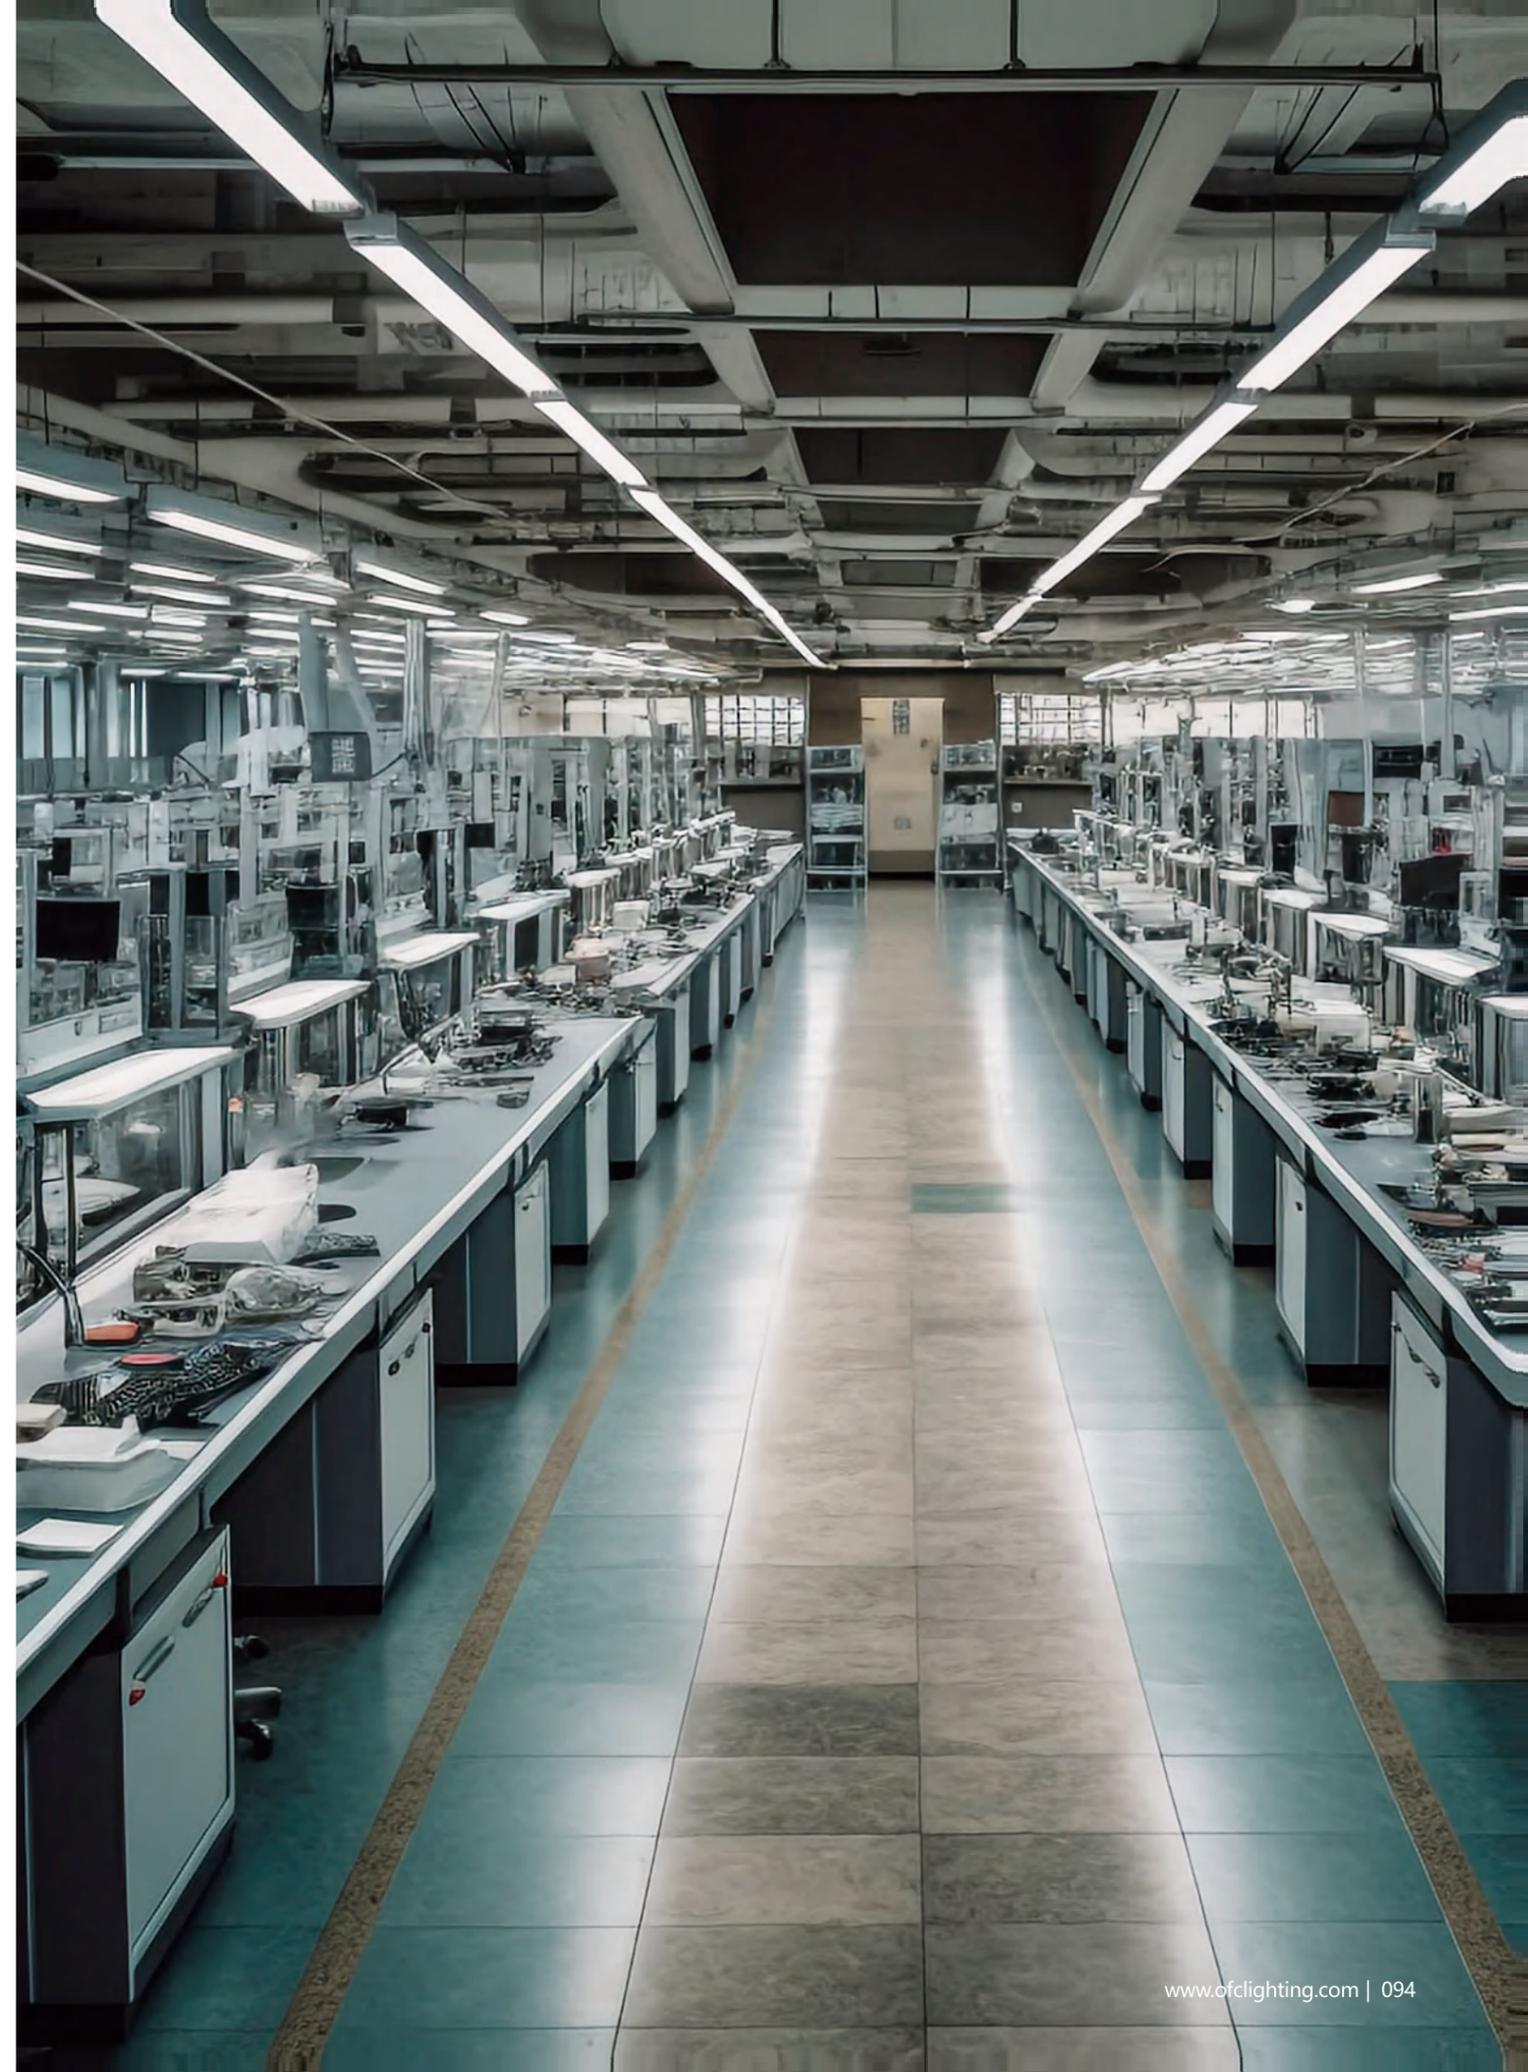


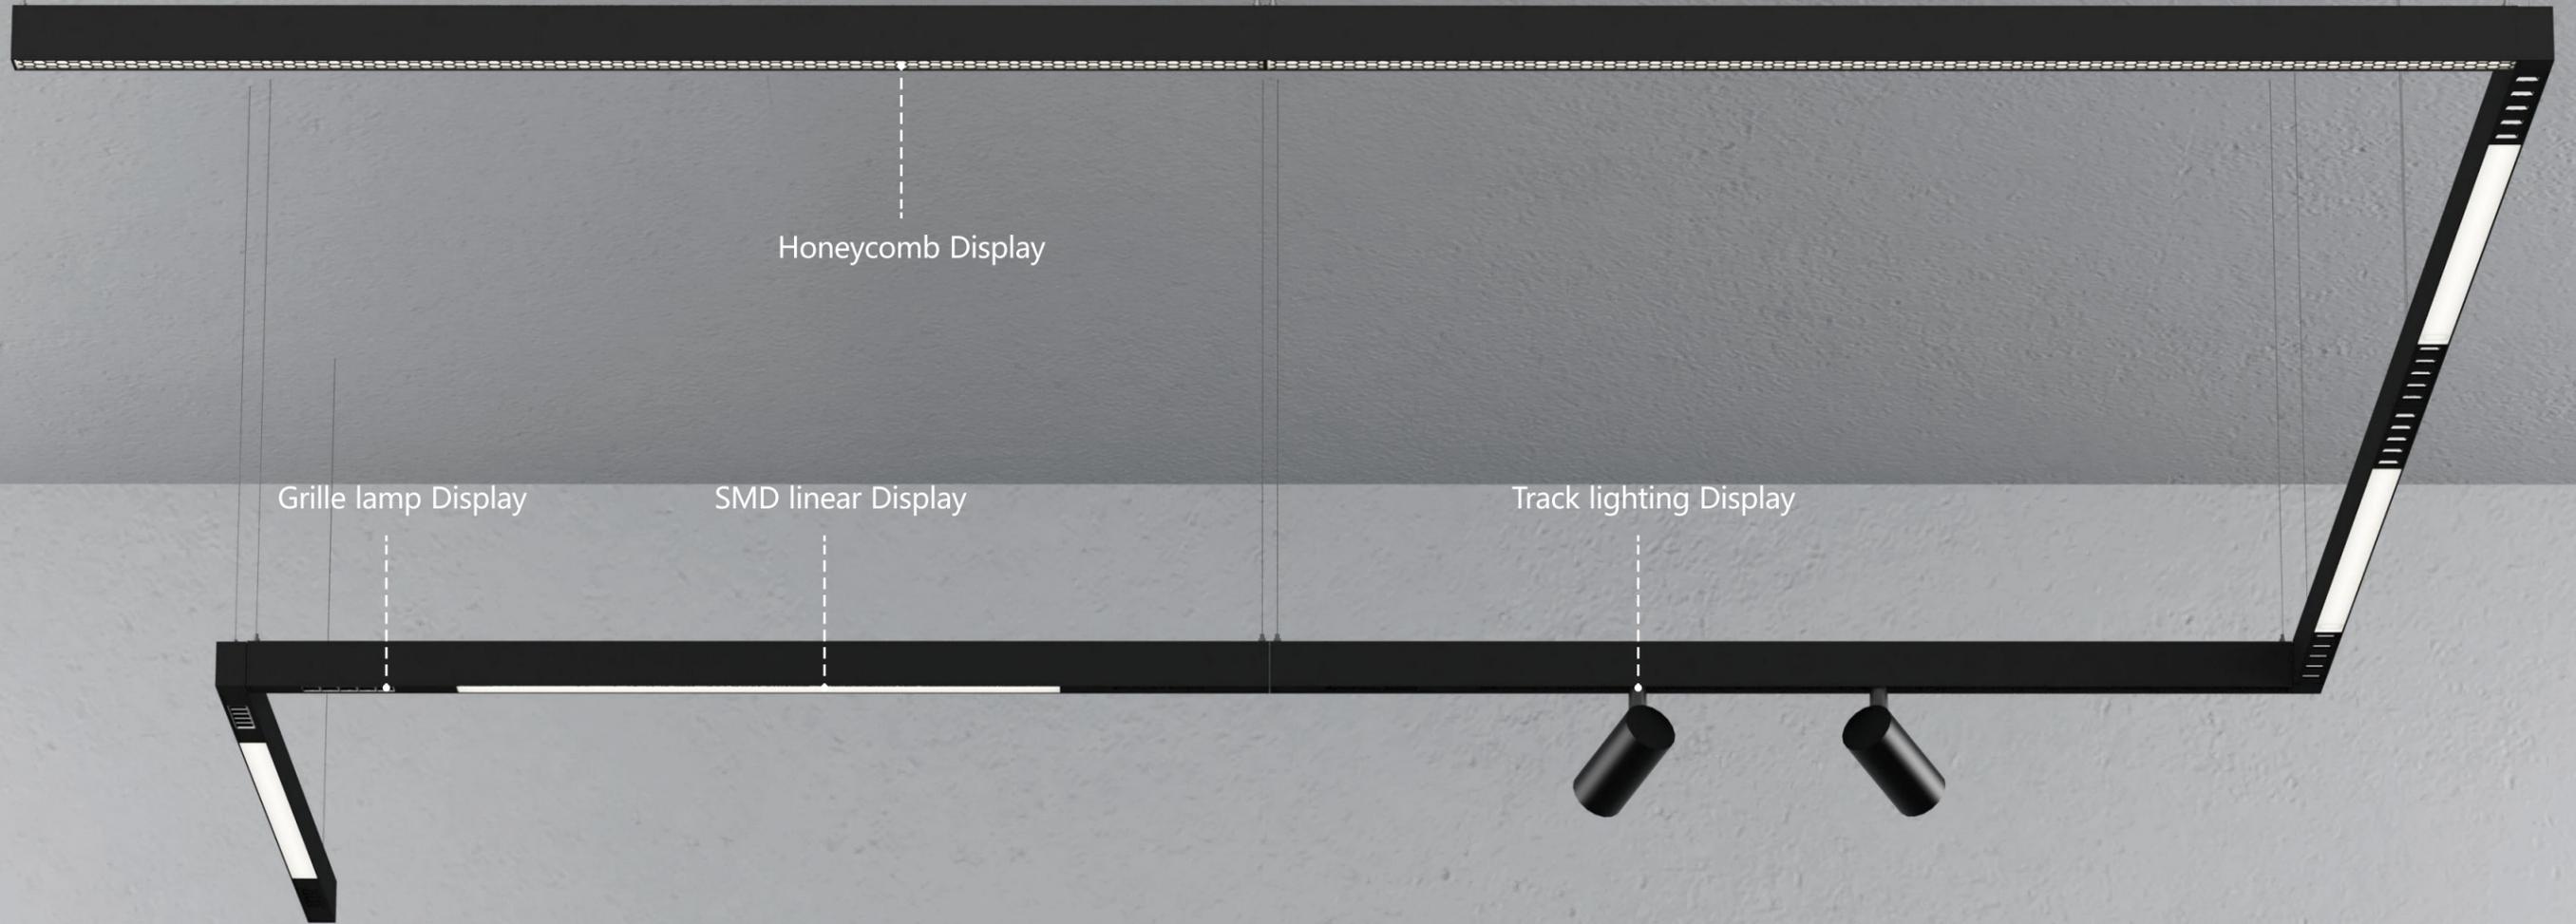

# WIP PRO

维普PRO·吊装办公照明

## INSTALLATION MODE




## LIGHT DISTRIBUTION



表面式安装灯具可以有效地用于增强建筑特征，可选择金属丝或金属杆悬挂，以增强建筑意图。通过间接照明照亮空间，提高舒适度。


Surface mounted luminaires can be used effectively to enhance architectural features, with the option of wire or metal pole suspension to enhance architectural intent. Enhance comfort by illuminating the space with indirect lighting.

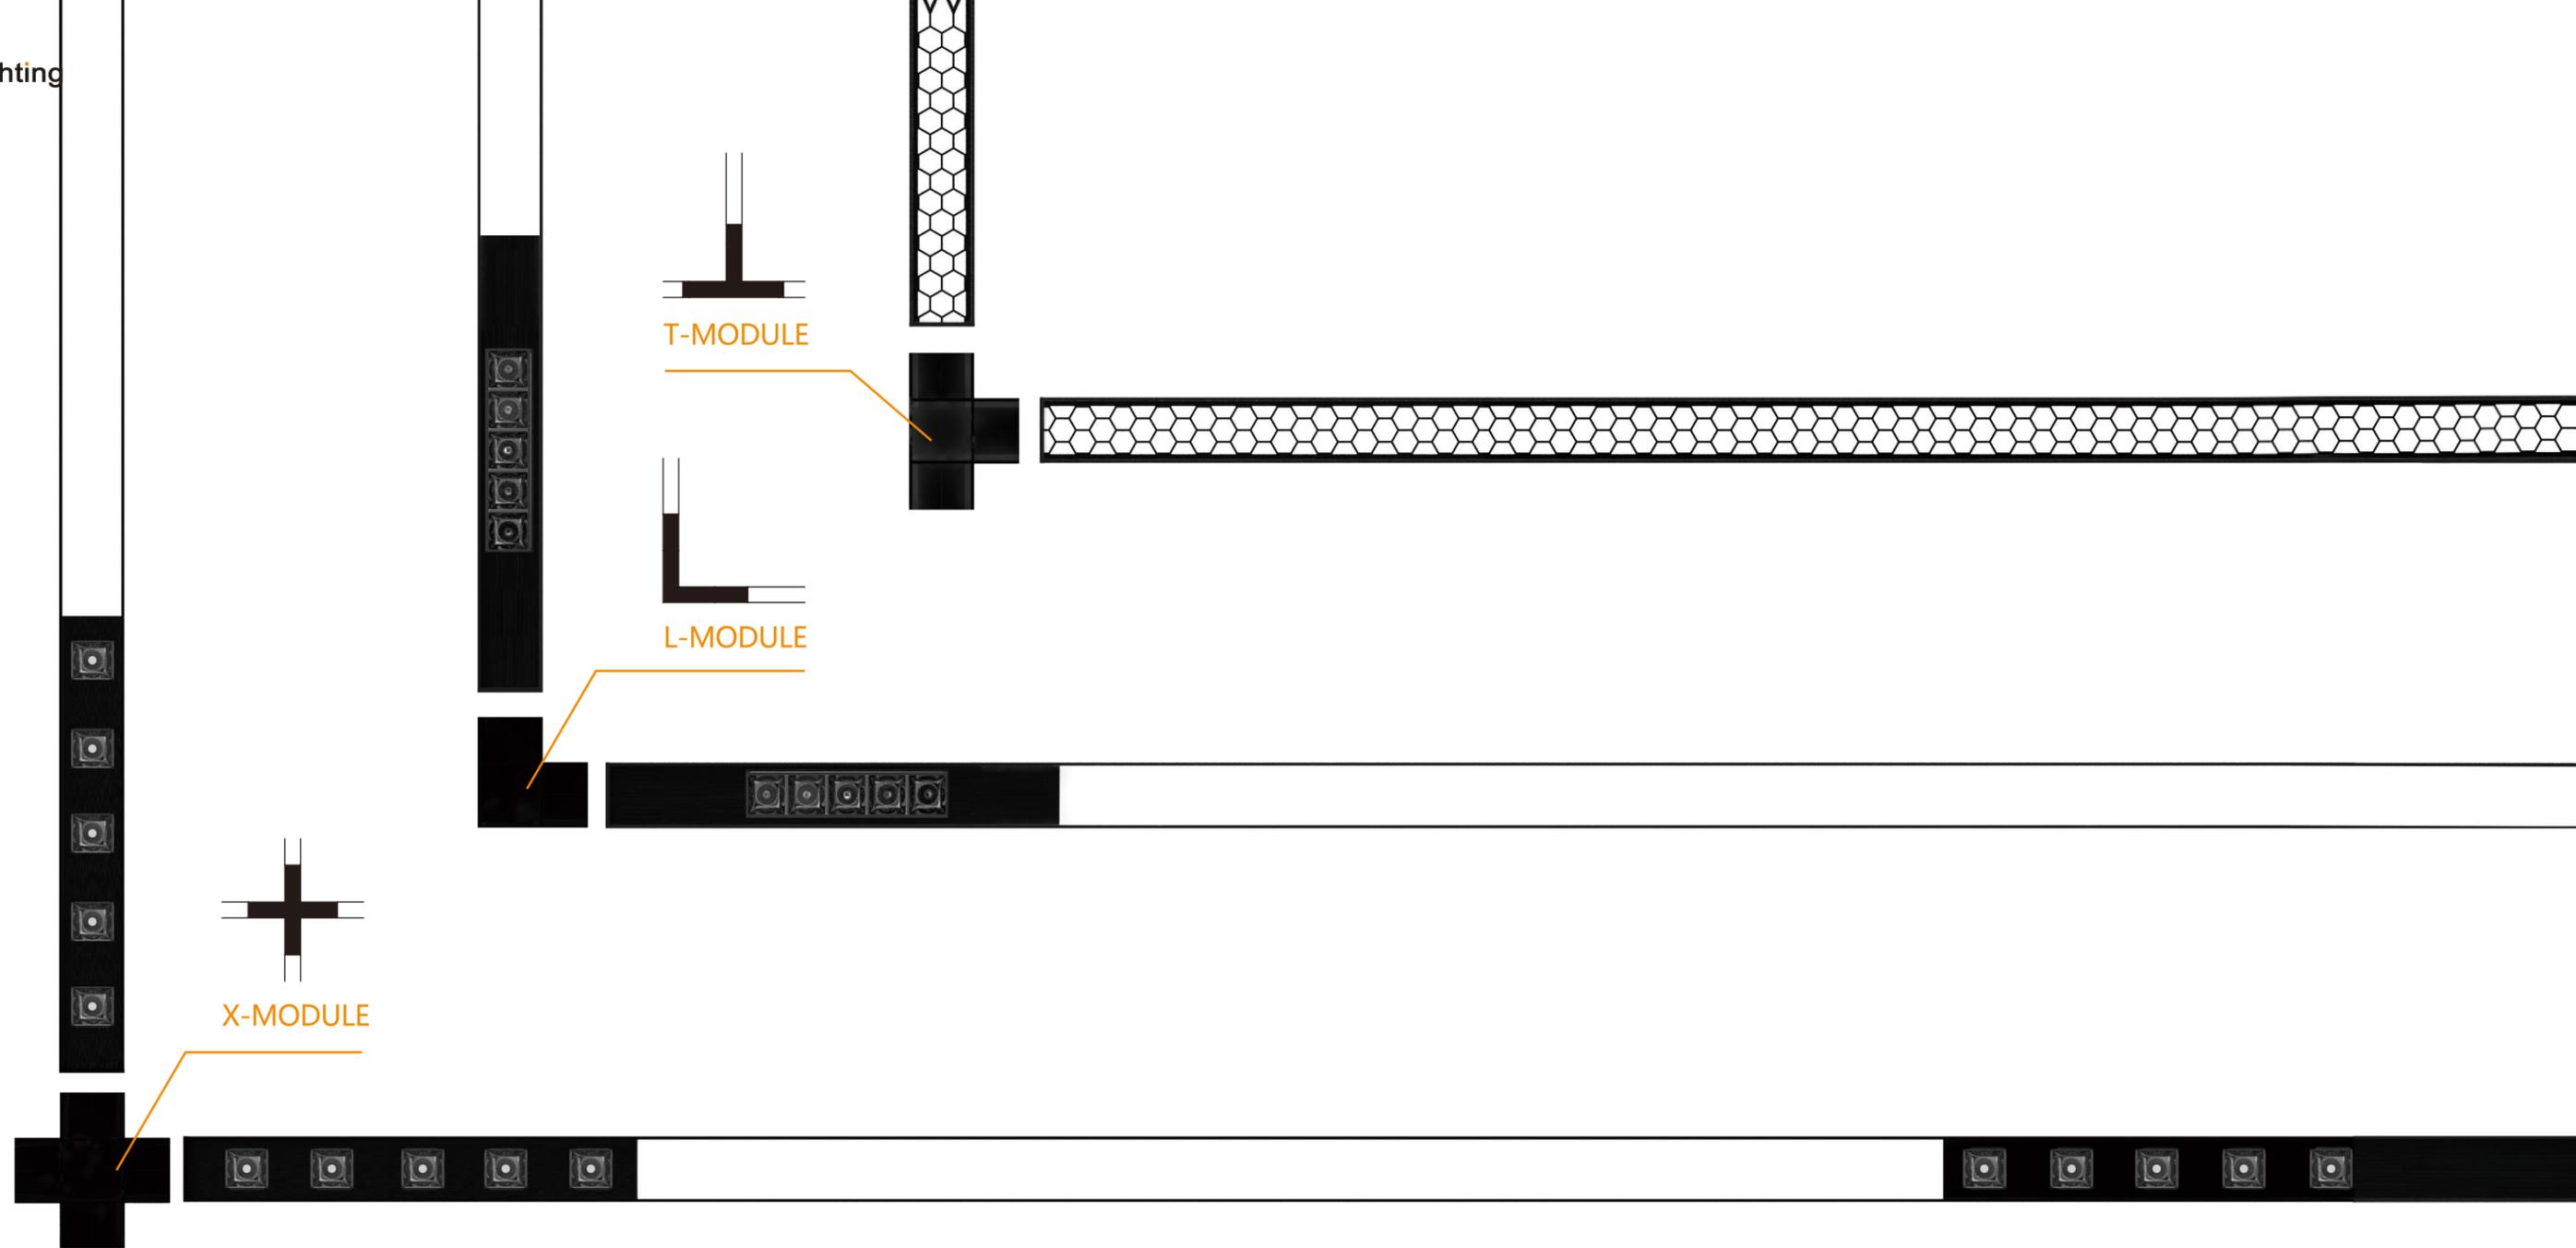

采用多角度连接件, 安装方便快捷, 有五种基本形状可以组合, 造型多变, 更符合现代办公照明的照明需求。

It adopts multi angle connectors, which is convenient and fast to install. There are five basic shapes that can be combined, and the shapes are changeable, which is more in line with the lighting requirements of modern office lighting.

### CONNECTION MODULE

- |                                                                                                                                           |                                                                                                                                           |                                                                                                                                           |                                                                                                                                           |                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>① L-MODULE<br/>L形接头—15W<br/>305×43×66 (2PCS)</p>  | <p>② T-MODULE<br/>T形接头—22W<br/>255×43×66 (3PCS)</p>  | <p>③ X-MODULE<br/>X形接头—30W<br/>255×43×66 (4PCS)</p>  | <p>④ Y-MODULE<br/>Y形接头—22W<br/>288×43×66 (3PCS)</p>  | <p>⑤ 120°-MODULE<br/>120度接头—15W<br/>313×43×66 (2PCS)</p>  |
|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|



COMMON INCREASE

多功能的组合确保了光线在众多空间中提供最终的性能; 可搭配SMD, 蜂窝网, COB, 轨道等配件照明系统, 适合各种照明解决方案。

The multi-functional combination ensures that the light provides the final performance in many spaces; It can be matched with SMD, cellular network, cob, track and other accessory lighting systems, suitable for various lighting solutions.

ACCESSORIES AVAILABLE

**A** Track lighting  
可增加轨道照明



**B** Double sided lighting  
可做上下透光




**C** SMD linear lighting  
可增加SMD线性照明




**D** Honeycomb  
可增加蜂窝网




**E** COB linear spotlight--1/2  
1. 可增加COB线性射灯 (截面为10W (5个))



2. 可增加COB线性射灯 (截面为6W (3个))




**F** COB linear spotlight--1/2  
可增加COB线性射灯 (截面为10W (5个))



**G** Prismatic linear lighting  
可增加棱晶网格



# SIX COLORS

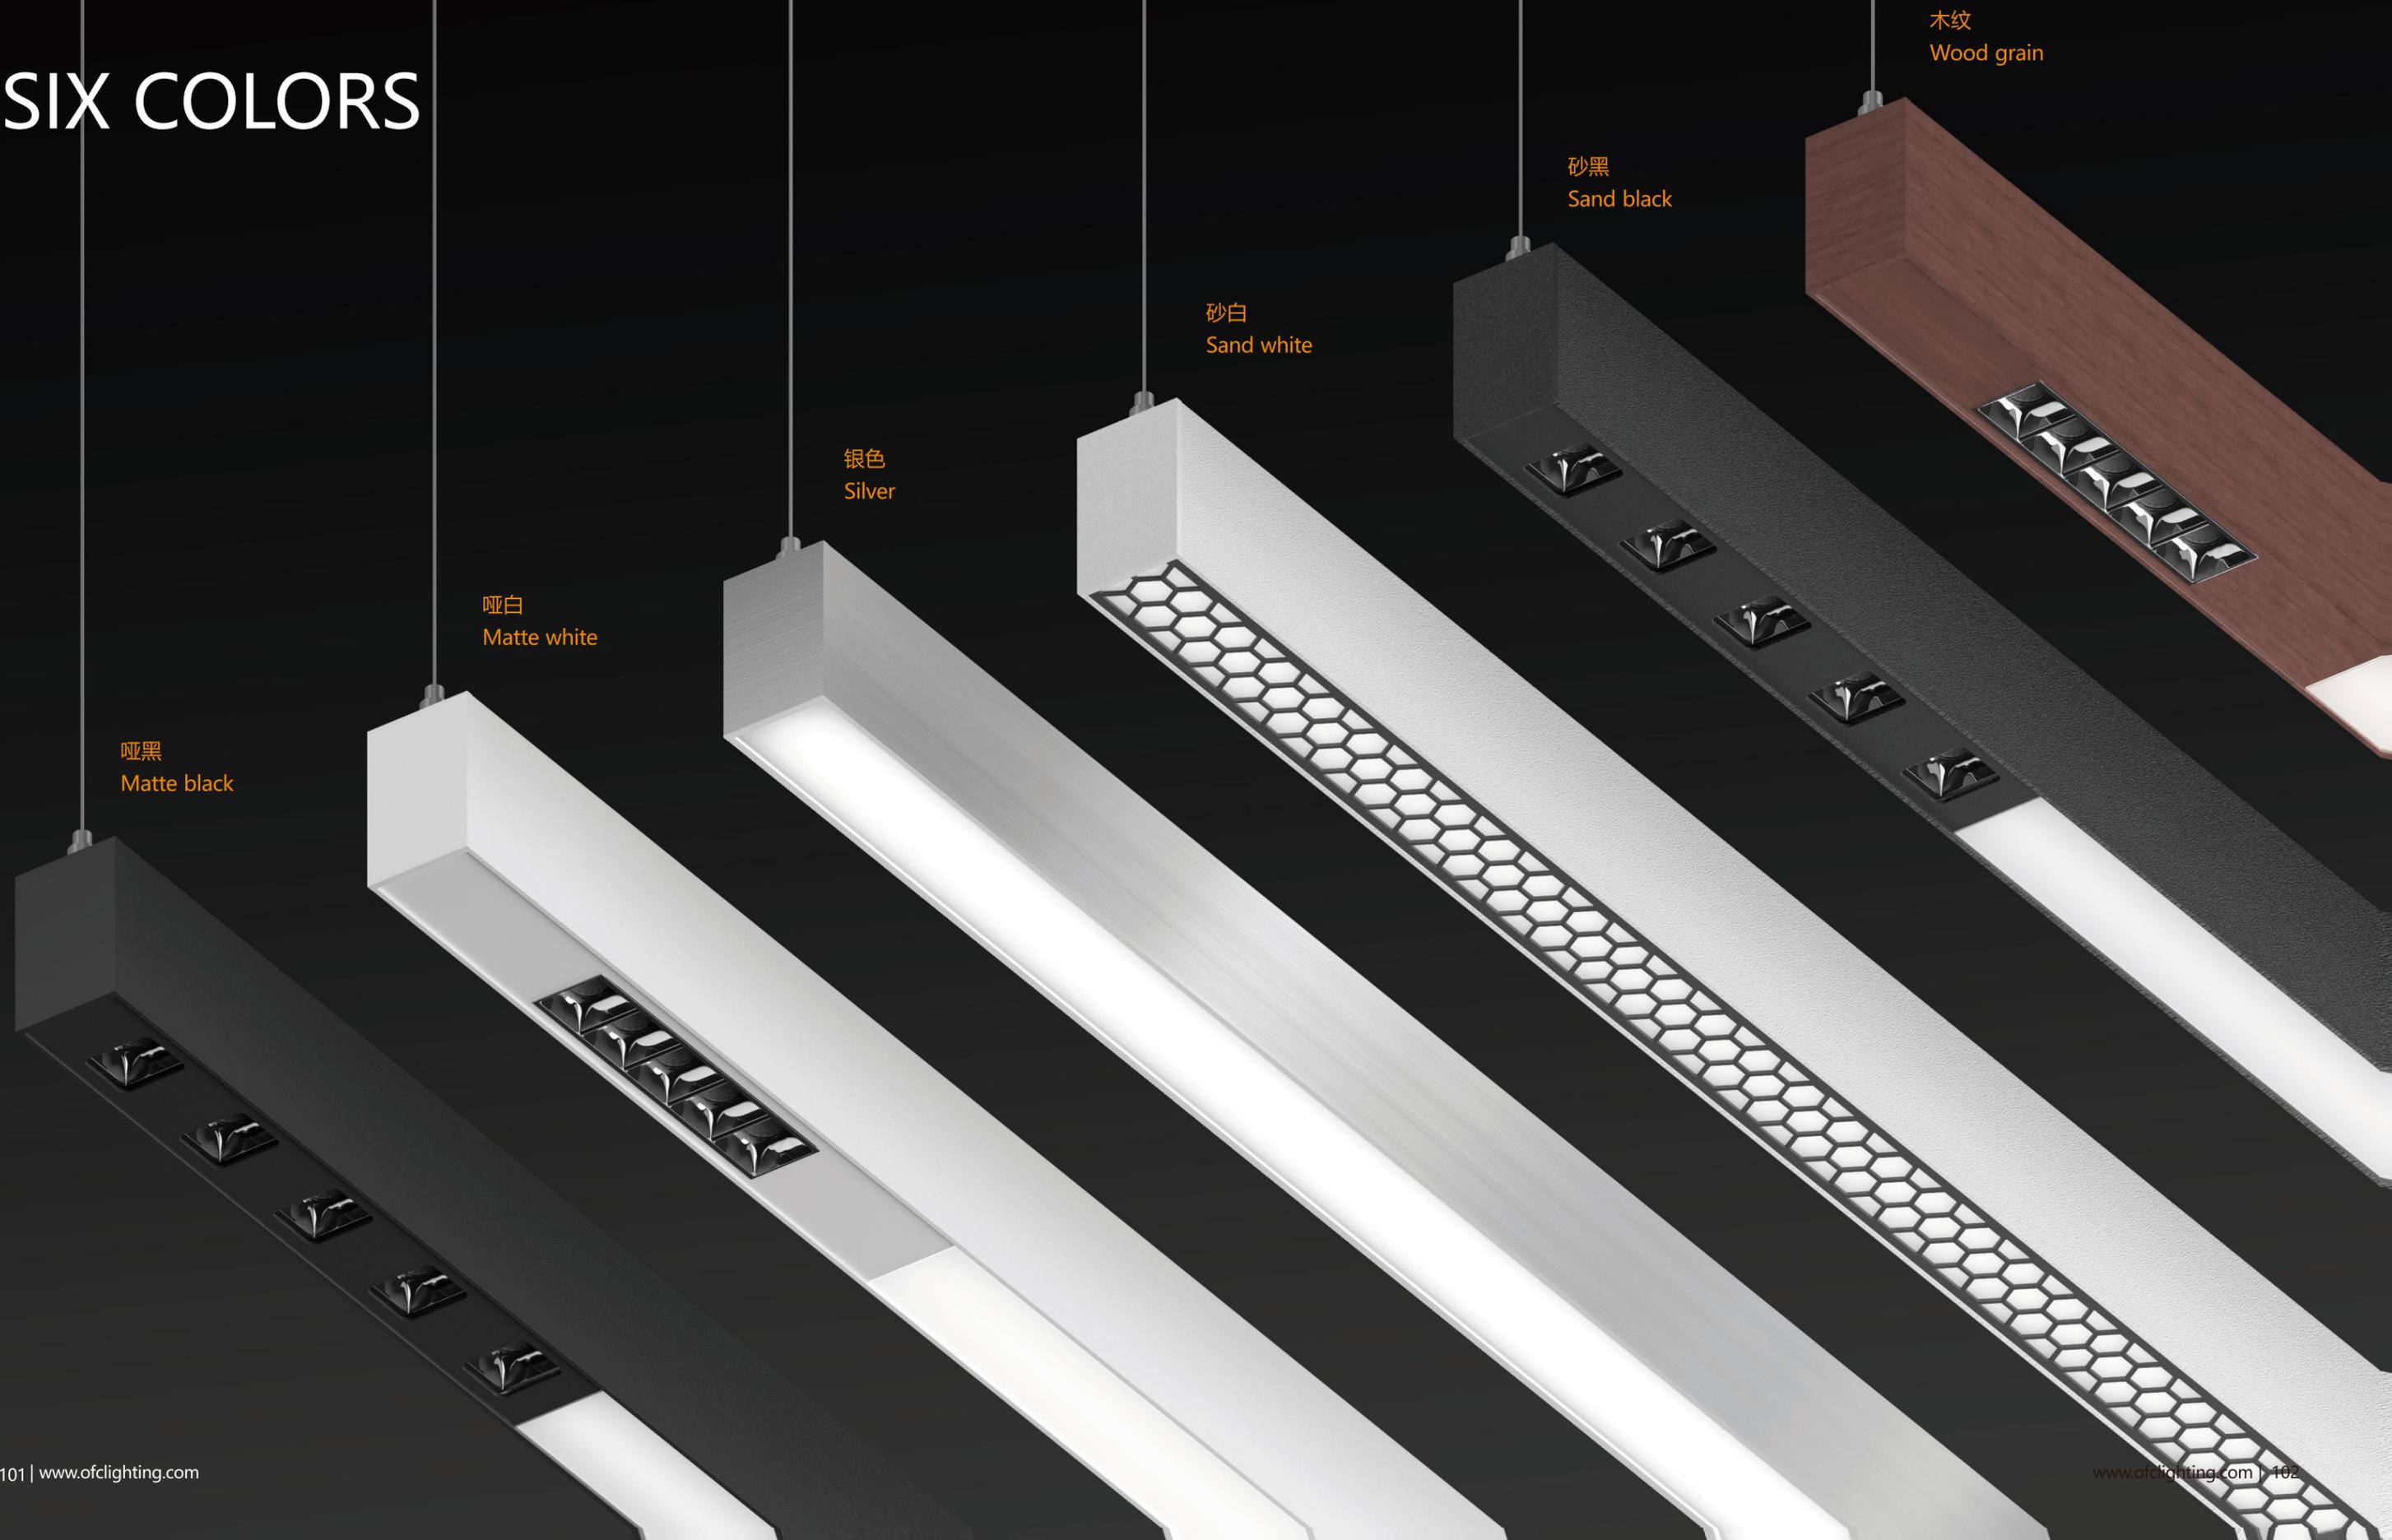

哑黑  
Matte black


哑白  
Matte white

银色  
Silver

砂白  
Sand white


砂黑  
Sand black

木纹  
Wood grain

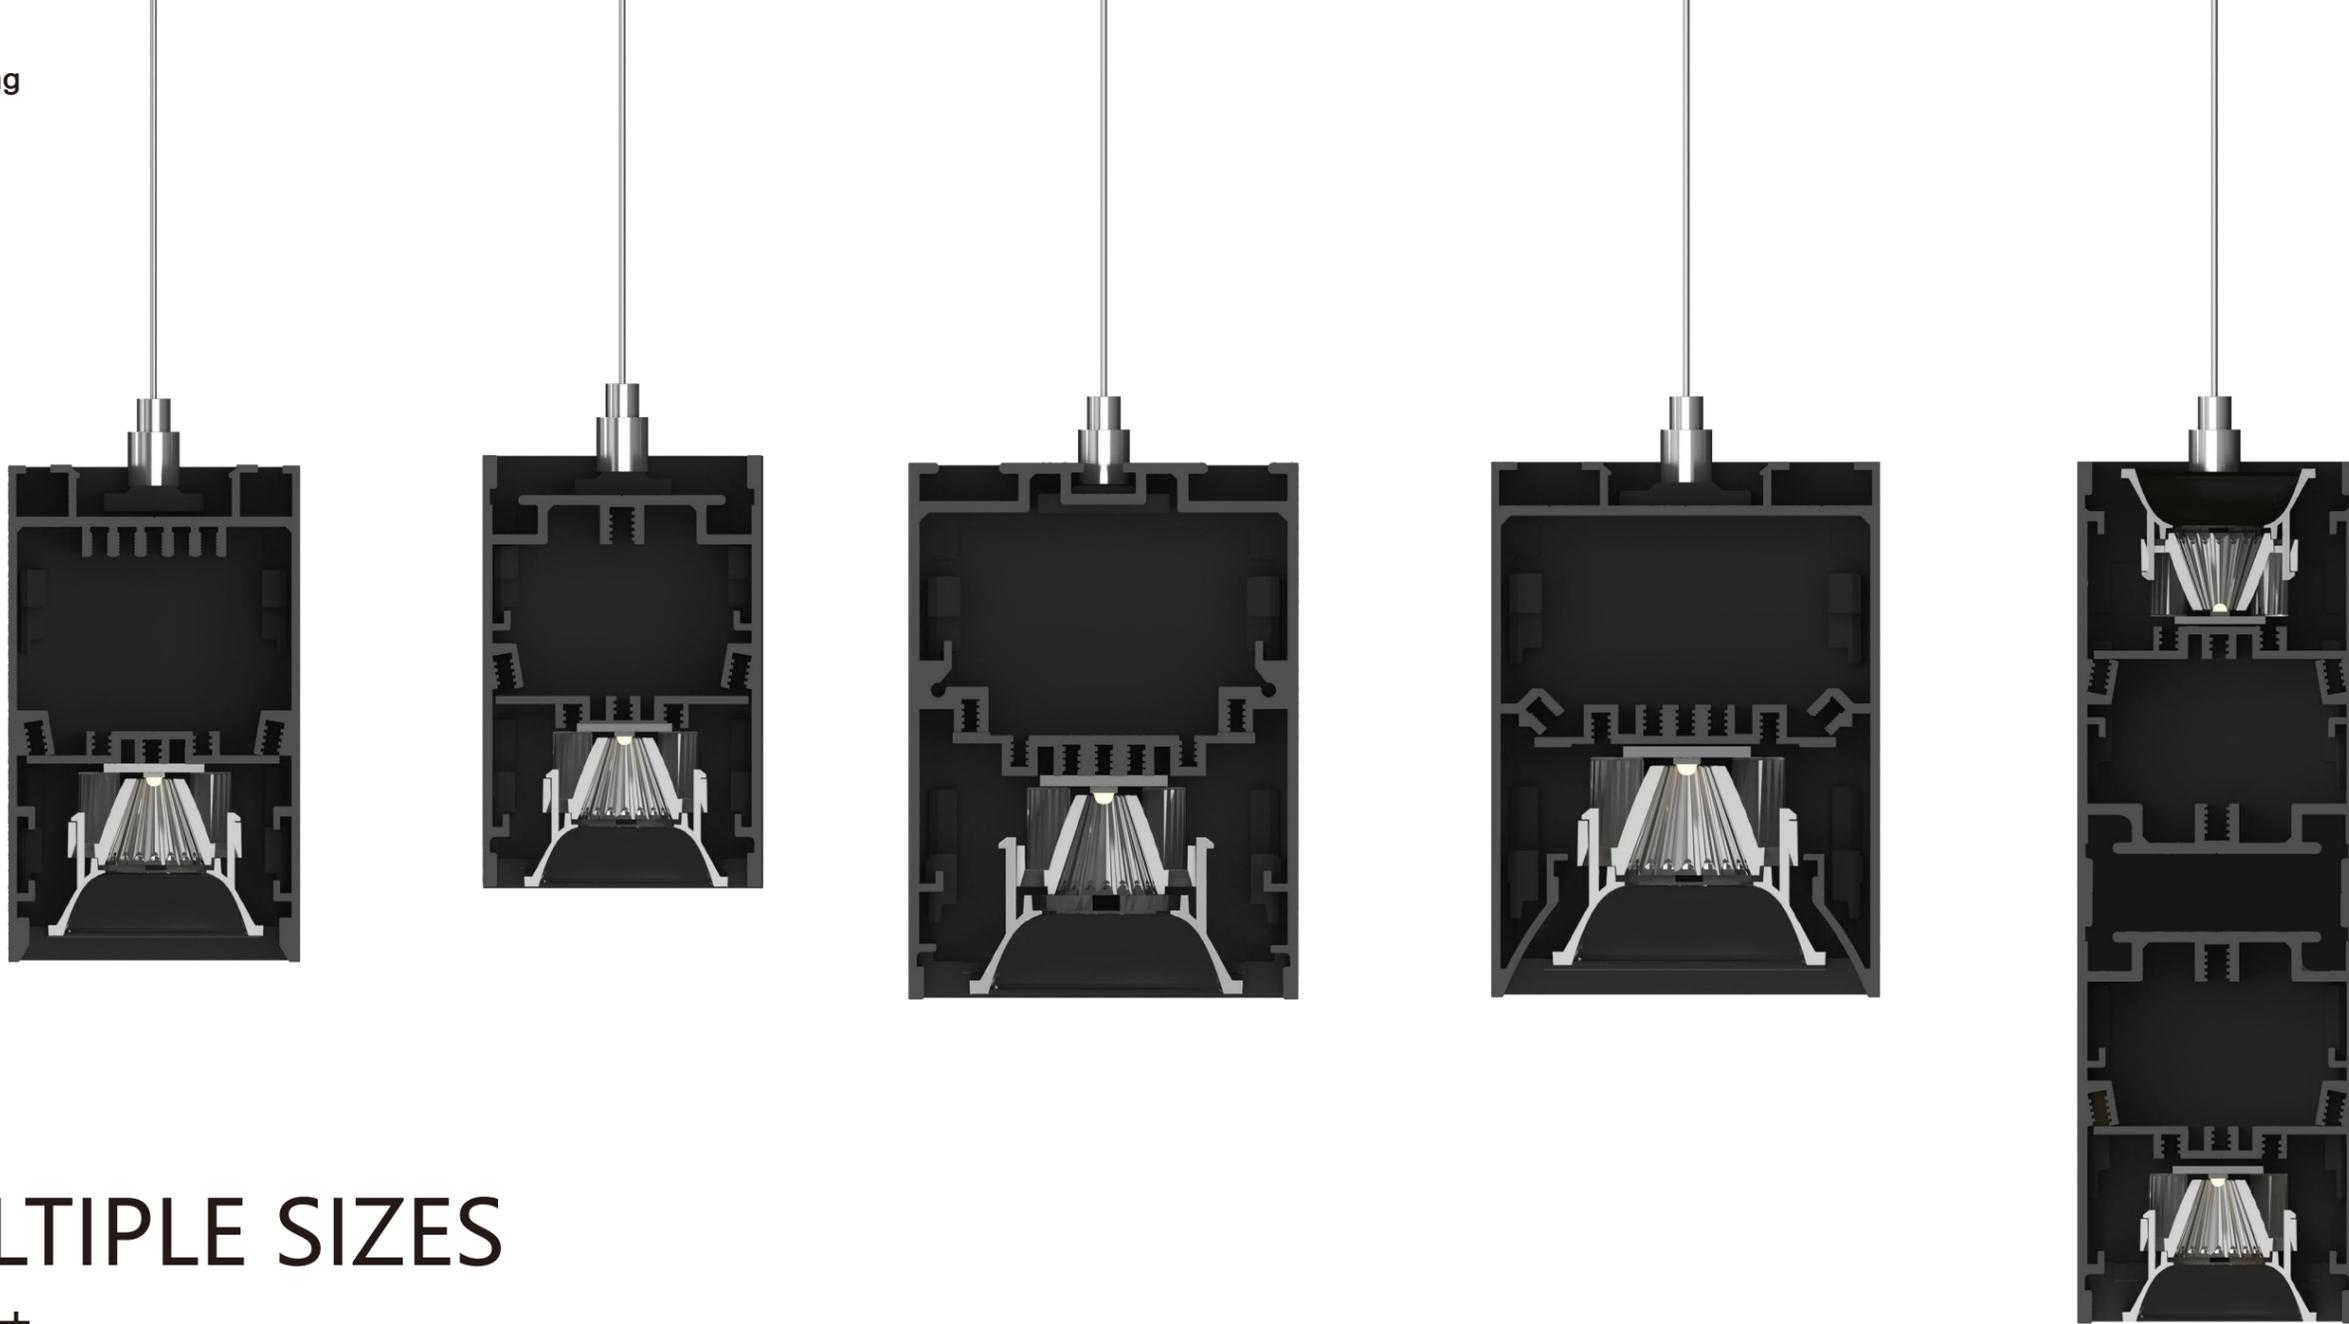

# MULTIPLE SIZES


多款尺寸

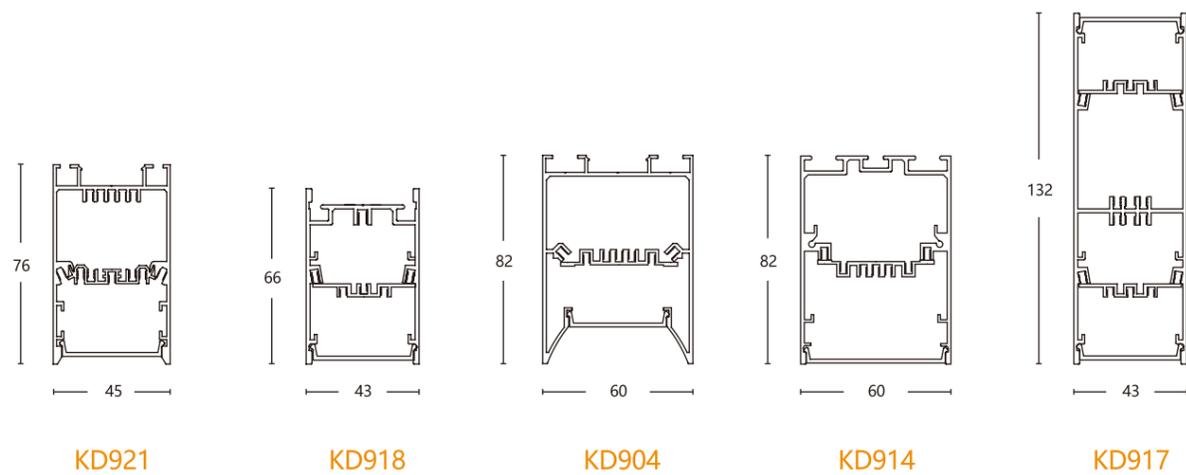


OFC照明具有灵活性，可以针对不同的用光环境做出相对应的照明方案，通过定制产品解决照明需求—无论你想要均匀洗墙还是重点照明。

OFC lighting has the flexibility to adapt to every new situation and react to changing requirements in a room – whether you want to evenly light an entire wall or accentuate a particular object.


KD921S-A

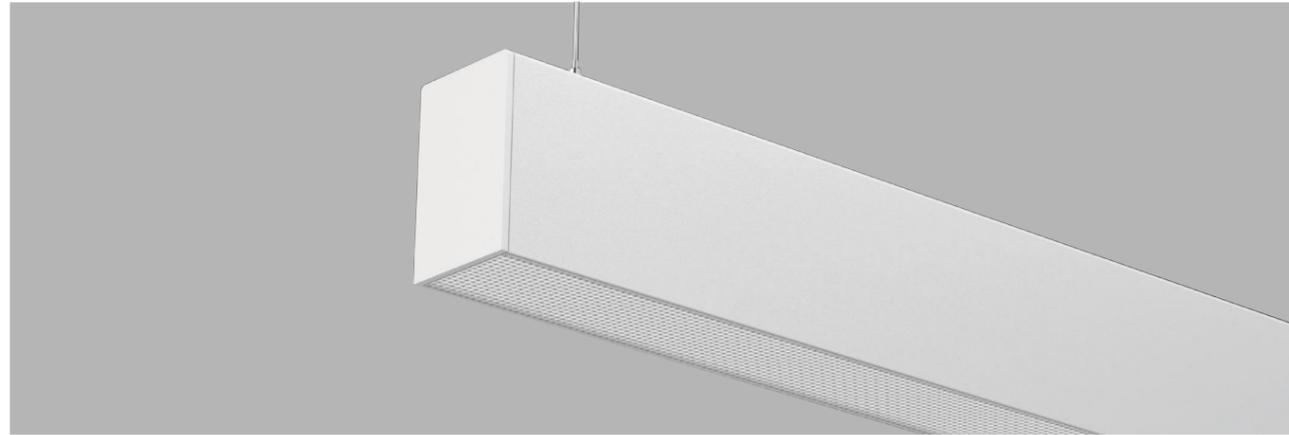


POWER	FLUX	SIZE	BEAM ANGLE
25W/M		L×W45×H76mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / Double sided lighting SMD / Prismatic linear lighting		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #808080; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> WG



KD921S-G

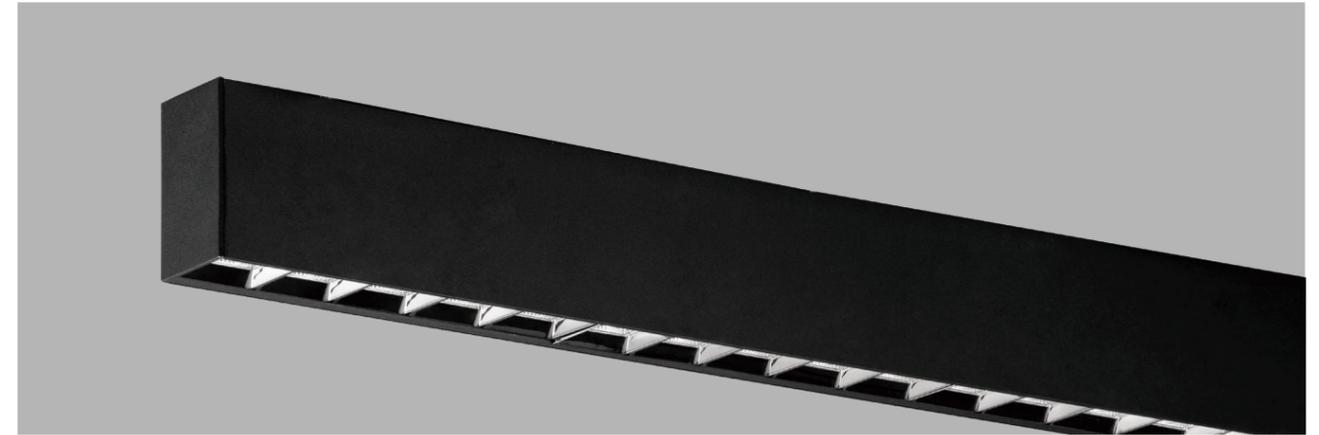



POWER	FLUX	SIZE	BEAM ANGLE
25W/M	95-105 lm/W	L1148×W45×H76mm	50°×50°70°×70°35°×70°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / Double sided lighting COB (5pcs)		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #808080; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> WG




KD921S-F




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	65-80 lm/W	L×W45×H76mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / Double sided lighting Honeycomb		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #808080; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> WG

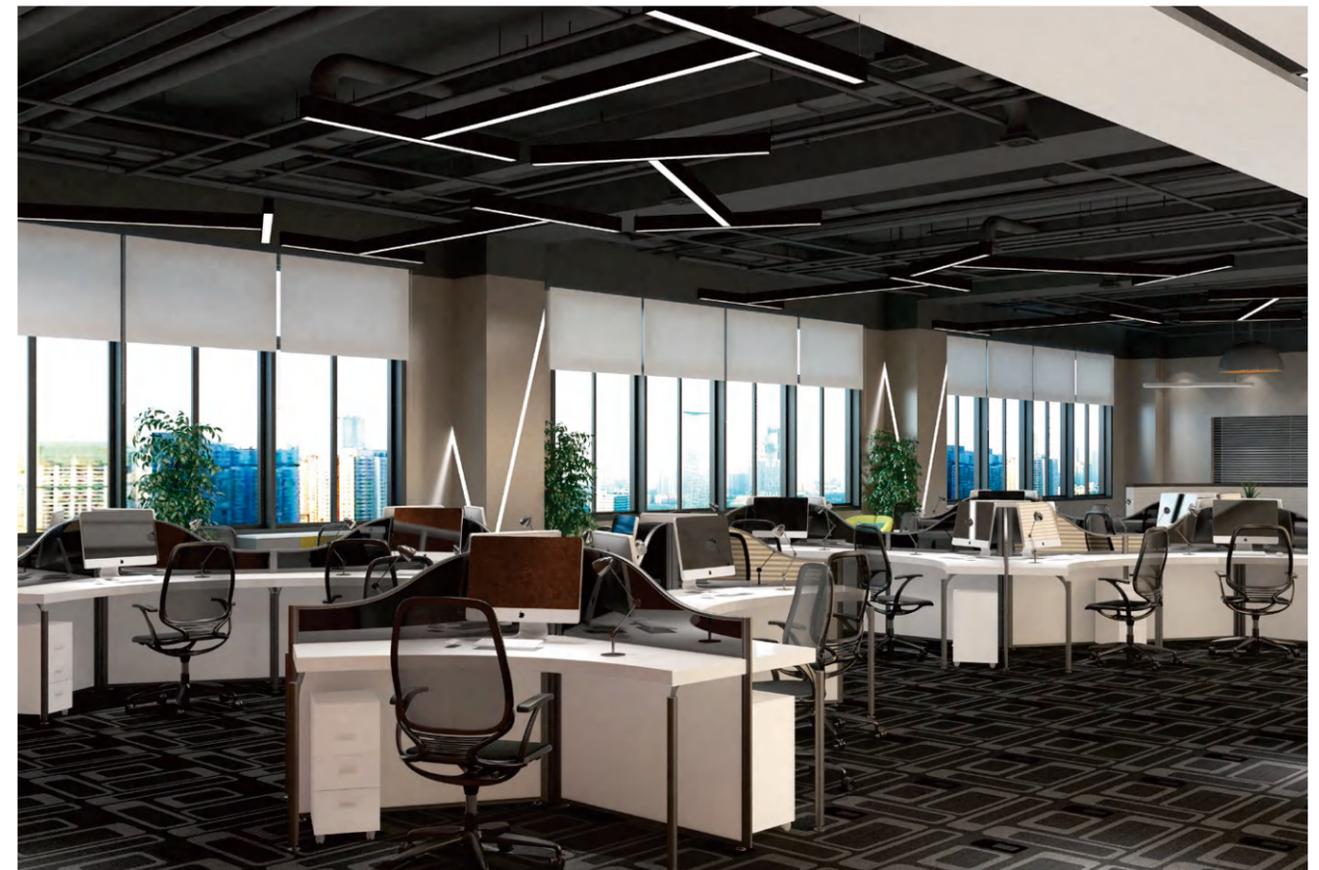

KD918-A

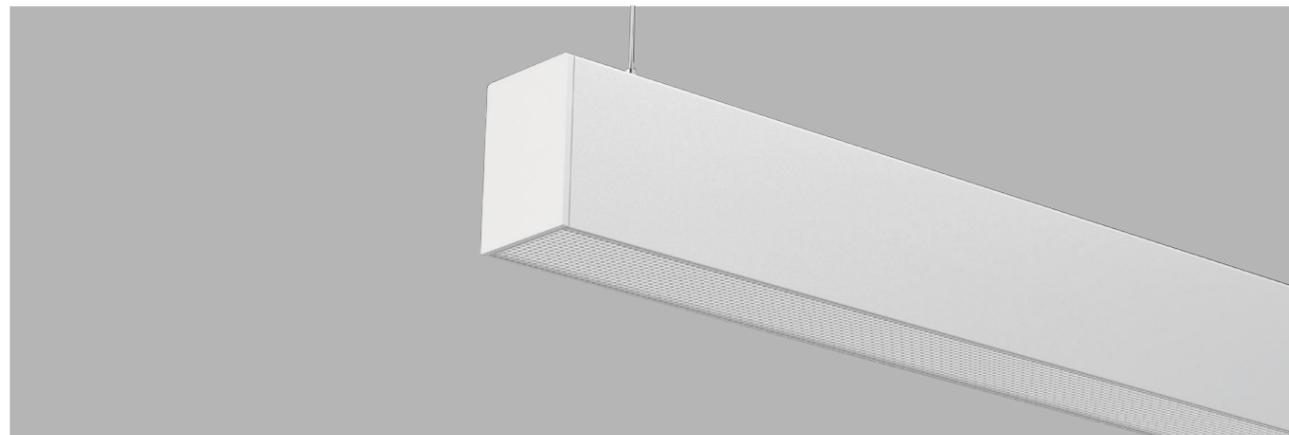


POWER	FLUX	SIZE	BEAM ANGLE
25W/M	80-95 lm/W	L×W43×H66mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / SMD / Prismatic linear lighting		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG



KD918/5T-G




POWER	FLUX	SIZE	BEAM ANGLE
35W	80-95 lm/W	L1200×W43×H66mm	15°/30°/45°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / COB (5pcs) / Honeycomb		3000k/4000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG



KD918-F




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	60-80 lm/W	L×W43×H66mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / Honeycomb		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG



KD918/1T-G




POWER	FLUX	SIZE	BEAM ANGLE
35W	80-95 lm/W	L1200×W43×H66mm	15°/30°/45°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
Track lighting / Wall washing lighting Honeycomb		3000k/4000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG






PRODUCT CODE	SIZE	POWER
KD904-A	L×W60×H82mm	Up15W/M Down25W/M
BEAM ANGLE	CCT	FLUX
60°	3000k/4000k/6000k	80-95 lm/W



ACCESSORIES AVAILABLE  
Track lighting / Double sided lighting / SMD  
Prismatic linear lighting




PRODUCT CODE	SIZE	POWER
KD904-F	L×W60×H82mm	Up15W/M Down25W/M
BEAM ANGLE	CCT	FLUX
60°	3000k/4000k/6000k	60-80 lm/W



ACCESSORIES AVAILABLE  
Track lighting / Double sided lighting  
Honeycomb




PRODUCT CODE	SIZE	POWER
KD904/5T-G	L1200×W60×H82mm	35W 35W+20W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k/6000k	80-95 lm/W



ACCESSORIES AVAILABLE  
Track lighting / Double sided lighting  
COB (5pcs) / Honeycomb




PRODUCT CODE	SIZE	POWER
KD904/1T-G	L1200×W60×H82mm	35W 35W+20W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k/6000k	80-95 lm/W



ACCESSORIES AVAILABLE  
Track lighting / Double sided lighting  
Wall washing lighting / Honeycomb

LAMP BODY COLOR ● MB ● MW ● SR ● SB ● SW ● WG

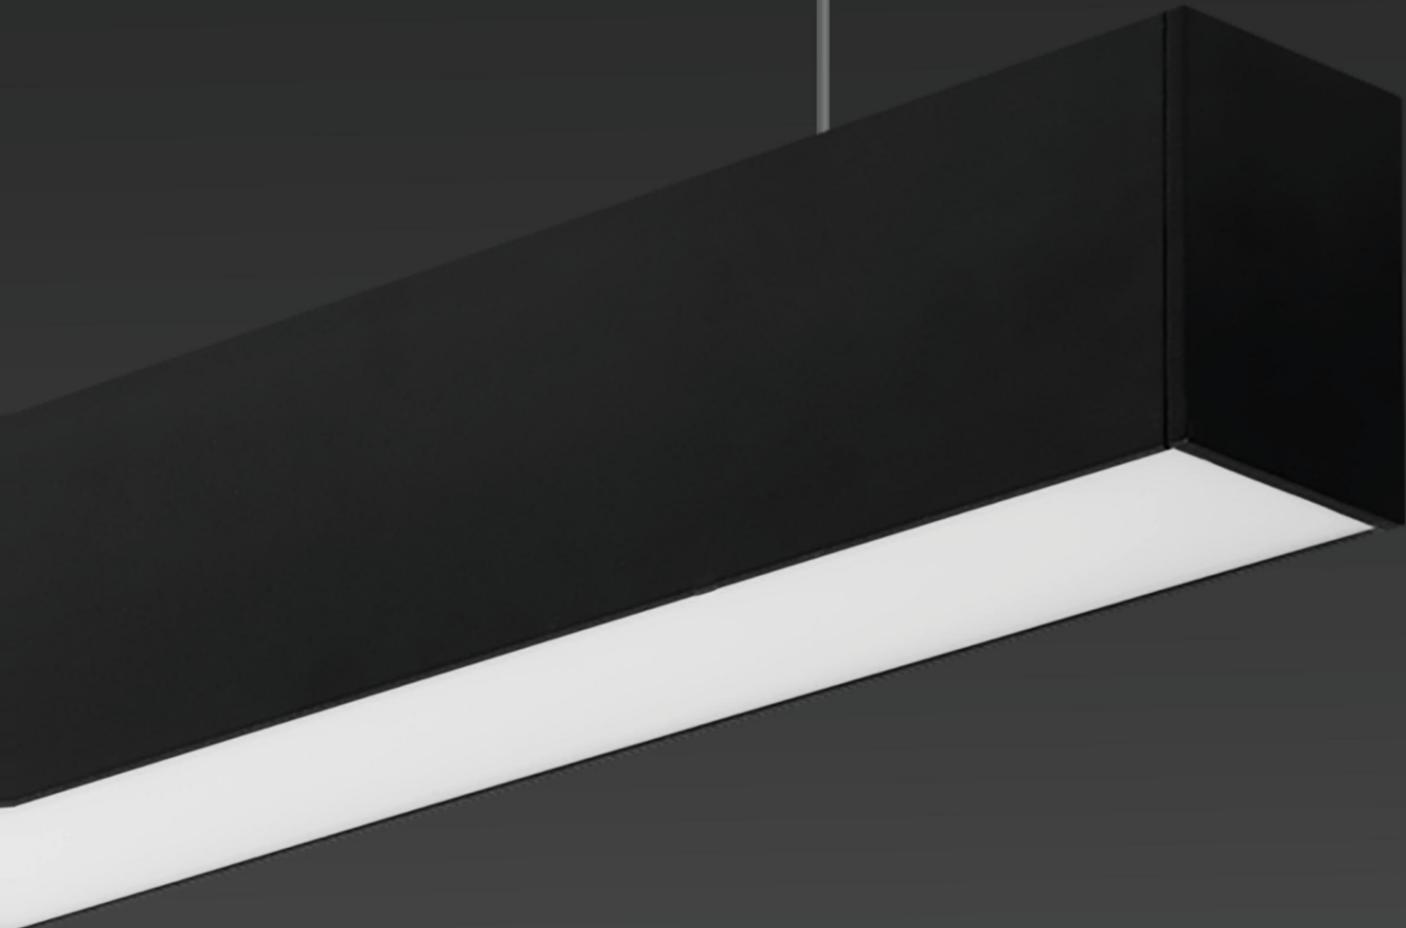

PRODUCT CODE	SIZE	POWER
KD914-A	L×W60×H82mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
ACCESSORIES AVAILABLE		
Track lighting / SMD / Prismatic linear lighting		



PRODUCT CODE	SIZE	POWER
KD914-L	L×W60×H82mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
ACCESSORIES AVAILABLE		
Track lighting / SMD / Prismatic linear lighting		



PRODUCT CODE	SIZE	POWER
KD914/5T-G	L1200×W43×H132mm	45W 55W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	80-95 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		



PRODUCT CODE	SIZE	POWER
KD914/1T-G	L1200×W60×H82mm	33W 36W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	80-95 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (3pcs)		


LAMP BODY COLOR  MB  MW  SR  SB  SW  WG



# WIP

维普·吊装办公照明


## INSTALLATION MODE



## LIGHT DISTRIBUTION



20M卷面长度

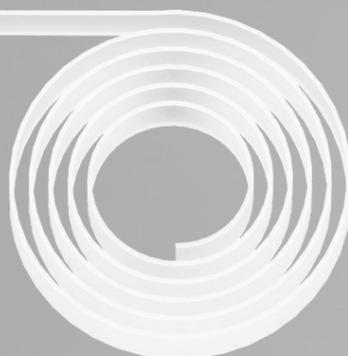

### 铝型材 Aluminium section

采用优质铝合金型材灯体，无螺丝压铸铝端盖，安装维护方便灵活。

Adopts high quality aluminum alloy profile lamp body, die-cast aluminum end cap without screws, convenient installation and maintenance.

### 铝基板 Aluminum substrate

高密度，获得更好的扩散器均匀性。

High density, better diffuser uniformity has been obtained.


### 亚克力盖板 PMMA cover

亚克力盖板可以无限延伸，面罩最长可做20米。

PMMA can be extended infinitely, and the longest mask can be used for 20 meters.




PRODUCT CODE	SIZE	POWER
KD517-A	L×W35×H34mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
ACCESSORIES AVAILABLE		
/		




PRODUCT CODE	SIZE	POWER
KD3570-A	L×W35×H69mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
ACCESSORIES AVAILABLE		
/		




PRODUCT CODE	SIZE	POWER
KD617-A	L×W55×H34mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
/		




PRODUCT CODE	SIZE	POWER
KD5573-A	L×W55×H73.5mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
/		



PRODUCT CODE	SIZE	POWER
KD917-A	L×W75×H34mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
/		



PRODUCT CODE	SIZE	POWER
KD7572-A	L×W75×H72mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
/		






使用场景

适用于办公室、书房、会议室、公共建筑、图书馆等

KD905-A




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	95-105 lm/W	L×W58×H68mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG



KD902S-A




POWER	FLUX	SIZE	BEAM ANGLE
Up15W/M Down25W/M	95-105 lm/W	L×W80×H102mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG




KD908S-A




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	95-105 lm/W	L×W80×H85mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG



KD907-A

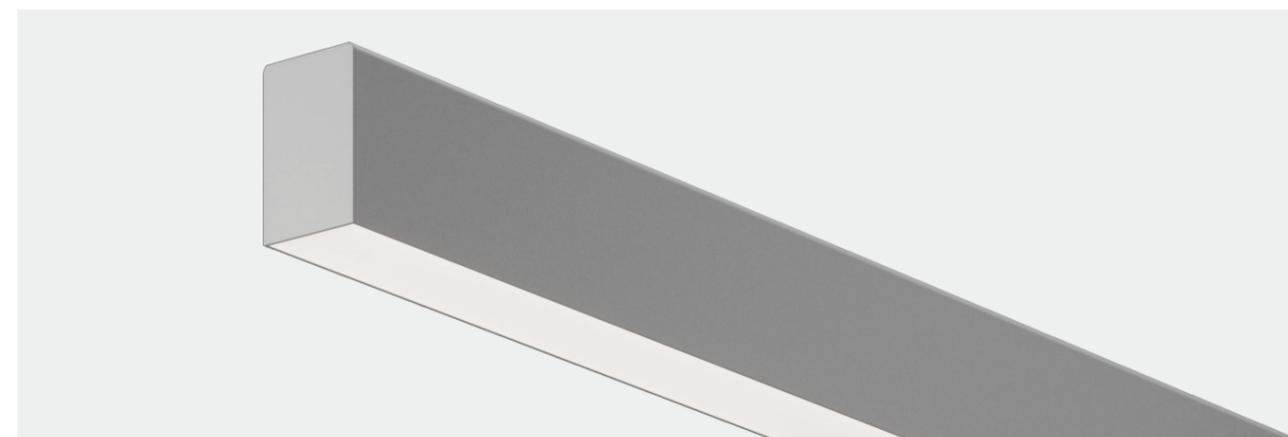

POWER	FLUX	SIZE	BEAM ANGLE
Up15W/M Down25W/M	95-105 lm/W	L×W80×H102mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	<span style="display: inline-block; width: 10px; height: 10px; background-color: black; border-radius: 50%;"></span> MB <span style="display: inline-block; width: 10px; height: 10px; background-color: #f0f0f0; border-radius: 50%;"></span> MW <span style="display: inline-block; width: 10px; height: 10px; background-color: #d0d0d0; border-radius: 50%;"></span> SR <span style="display: inline-block; width: 10px; height: 10px; background-color: #404040; border-radius: 50%;"></span> SB <span style="display: inline-block; width: 10px; height: 10px; background-color: #a0a0a0; border-radius: 50%;"></span> SW <span style="display: inline-block; width: 10px; height: 10px; background-color: #804020; border-radius: 50%;"></span> WG




OFC lighting

KD919 




POWER	FLUX	SIZE	BEAM ANGLE
38W/M	80-95 lm/W	L×W95×H106mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	



KD201-A 




POWER	FLUX	SIZE	BEAM ANGLE
25W/M	80-95 lm/W	L×W50×H50mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	




KD916-A  




POWER	FLUX	SIZE	BEAM ANGLE
Up15W/M Down25W/M	80-95 lm/W	L×W43×H102mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	



KD932-A 

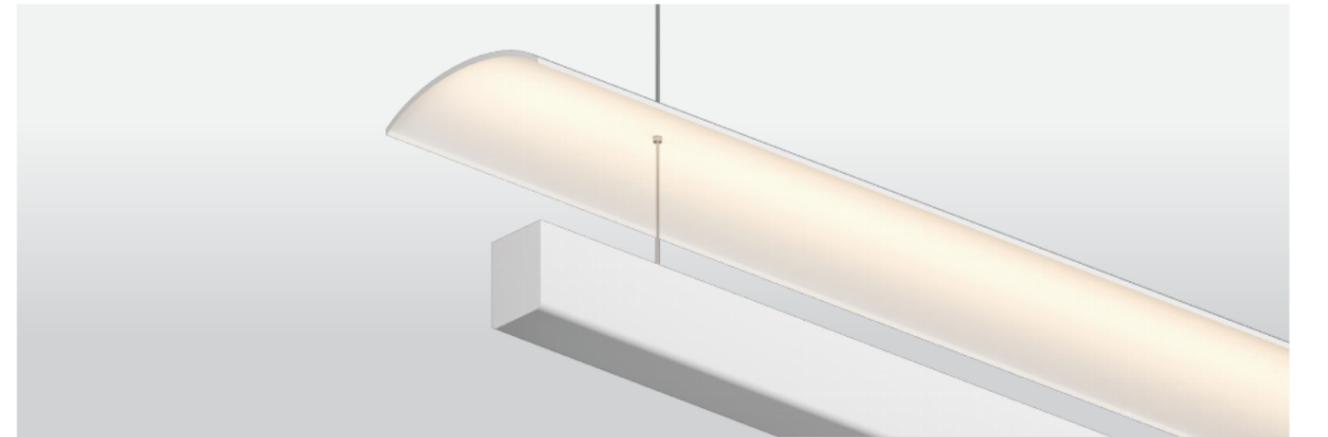

POWER	FLUX	SIZE	BEAM ANGLE
25W/M	80-95 lm/W	L×W60×H82mm	110°
ACCESSORIES AVAILABLE		CCT	LAMP BODY COLOR
/		3000k/4000k/6000k	




# FEDORA

## 佛罗·圆环灯

适用于机场、高铁站、商店、展厅、家庭、办公室、学校、工厂、医院、图书馆、超市、地铁、酒店、餐厅等场所。产品节能寿命长。

Suitable for airports, high-speed rail stations, shops, exhibition halls, families, offices, schools, factories, hospitals, libraries, supermarkets, subways, hotels, restaurants, etc., the product energy-saving long life.

INSTALLATION MODE



LIGHT DISTRIBUTION






灯是极简非主灯空间的首选，以简洁的环形造型点缀空间。

The lamp is the first choice for the minimalist non main lamp space, with simple ring shape and embellishment space.



PRODUCT CODE	SIZE	POWER
KD701	Φ300mm	24W
BEAM ANGLE	CCT	FLUX
15°/30°	3000k/4000k/6000k	> 60 lm/W
NUMBER OF SPOTLIGHTS		
12pcs		



PRODUCT CODE	SIZE	POWER
KD702	Φ600mm	48W
BEAM ANGLE	CCT	FLUX
15°/30°	3000k/4000k/6000k	> 60 lm/W
NUMBER OF SPOTLIGHTS		
24pcs		



PRODUCT CODE	SIZE	POWER
KD703	Φ900mm	72W
BEAM ANGLE	CCT	FLUX
15°/30°	3000k/4000k/6000k	> 60 lm/W
NUMBER OF SPOTLIGHTS		
36pcs		



LAMP BODY COLOR  SB  SW



# HERIK SERIES

## KD803

有表面安装和悬挂两种安装方式，灯体可以做上下发光从而达到最大的效率。



There are two mounting methods, surface mounting and hanging, the lamp body can do up and down light to achieve maximum efficiency.

Kd803 




PRODUCT DETAIL  
DISASSEMBLY DRAWING

产品细节拆解图

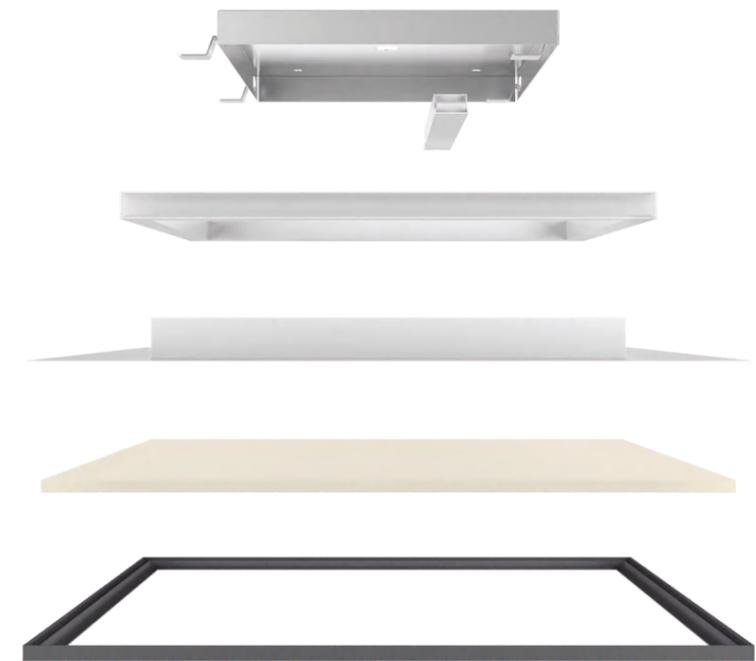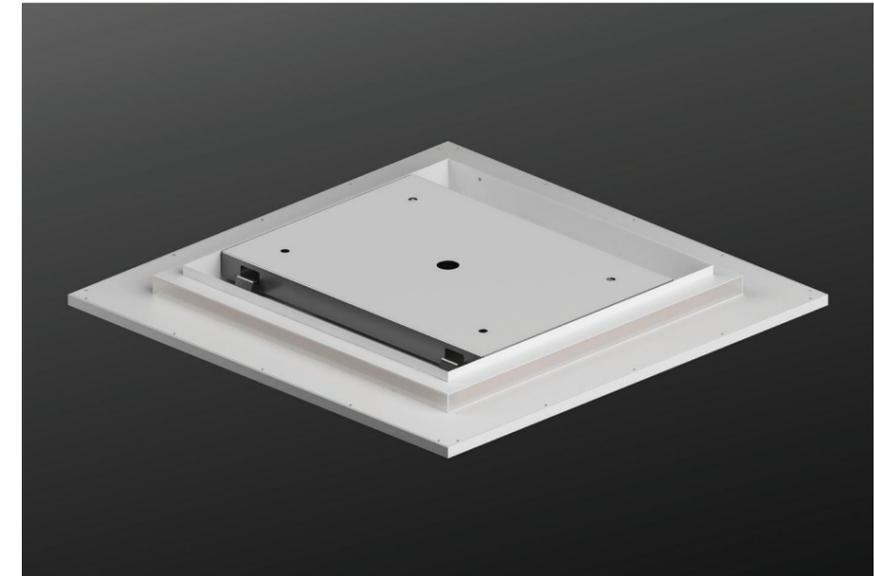




POWER	FLUX	SIZE	BEAM ANGLE
30W/M	> 95 lm/W	L595×W595×H50mm	110°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	3000k/4000k/6000k	 SB  SW	



OFC项目案例：雅诗兰黛上海总部


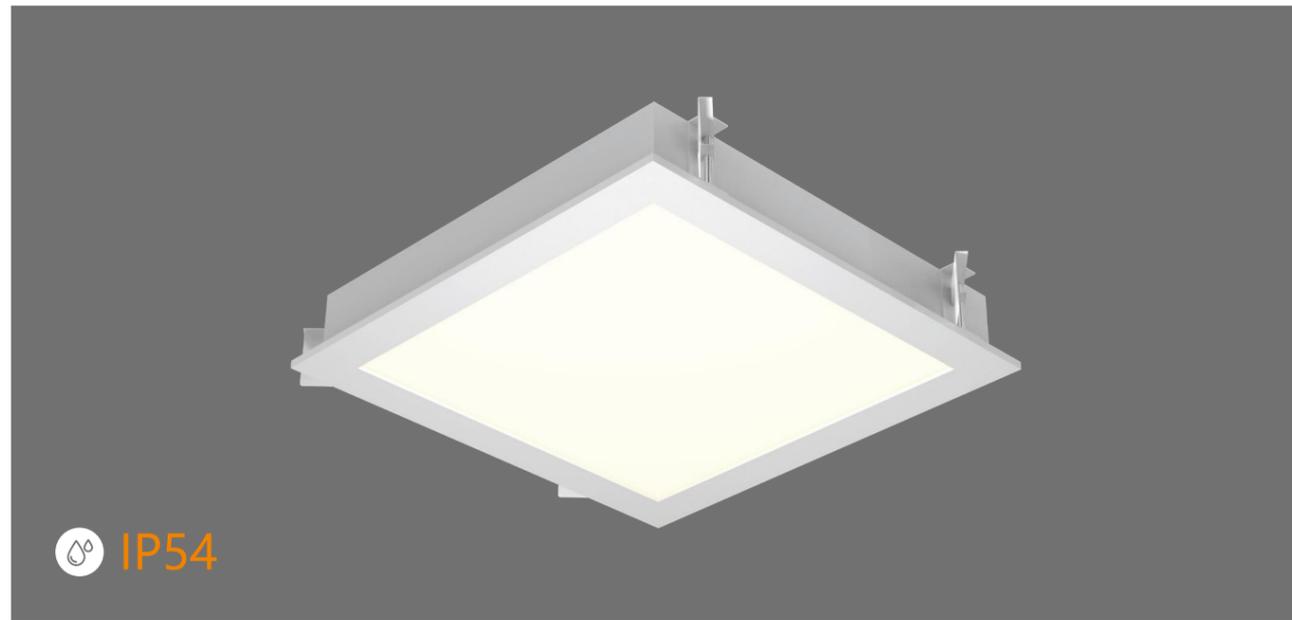


 IP54

POWER	FLUX	SIZE	BEAM ANGLE
40W/M 60W/M	115 lm/W	L600×W600×H98mm	110°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	6000k	 SW	

洁净区灯具耐VHP熏蒸，防UV，专用光谱！

光谱参数

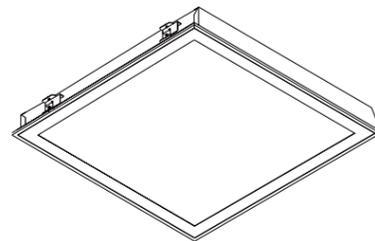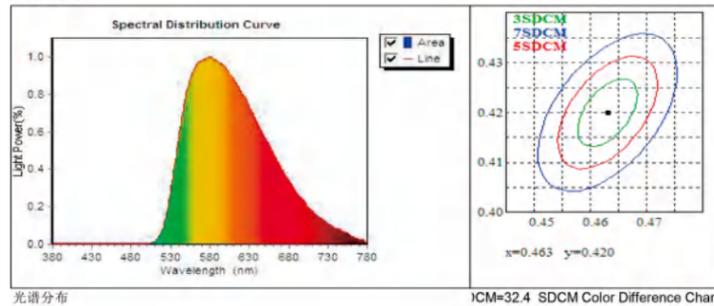

CIE颜色参数

色品坐标:  $x=0.5174$   $y=0.4792$   $u=0.2683$   $v=0.3726$  ( $duv=0.0190$ )  
 相关色温:  $T_C=2495$  K 色容差:  $SDCM=32.4$  主波长:  $\lambda_d=577.03$  nm 色纯度:  $Purity=0.946$   
 峰值波长:  $\lambda_p=579.3$  nm 半宽度:  $\Delta\lambda_p=121.1$  nm 色比:  $R=23.43\%$   $G=76.57\%$   $B=0.00\%$

显色指数:  $Ra=42$

$R1=44.3$   $R2=56.4$   $R3=50.5$   $R4=27.8$   $R5=36.6$   $R6=30.5$   $R7=59.0$   $R8=30.2$   
 $R9=63.9$   $R10=-0.5$   $R11=-0.5$   $R12=-27.5$   $R13=43.0$   $R14=72.2$   $R15=41.4$



# HERIK SERIES

## KD608S

KD608S




项目案例：西安交通大学



①




POWER	SIZE	BEAM ANGLE
30W+15W	L1200×W260×H30mm	110°
60W+30W	L2400×W260×H30mm	
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR
/	3000k/4000k/6000k	



# HERIK SERIES



KD802 海鸥

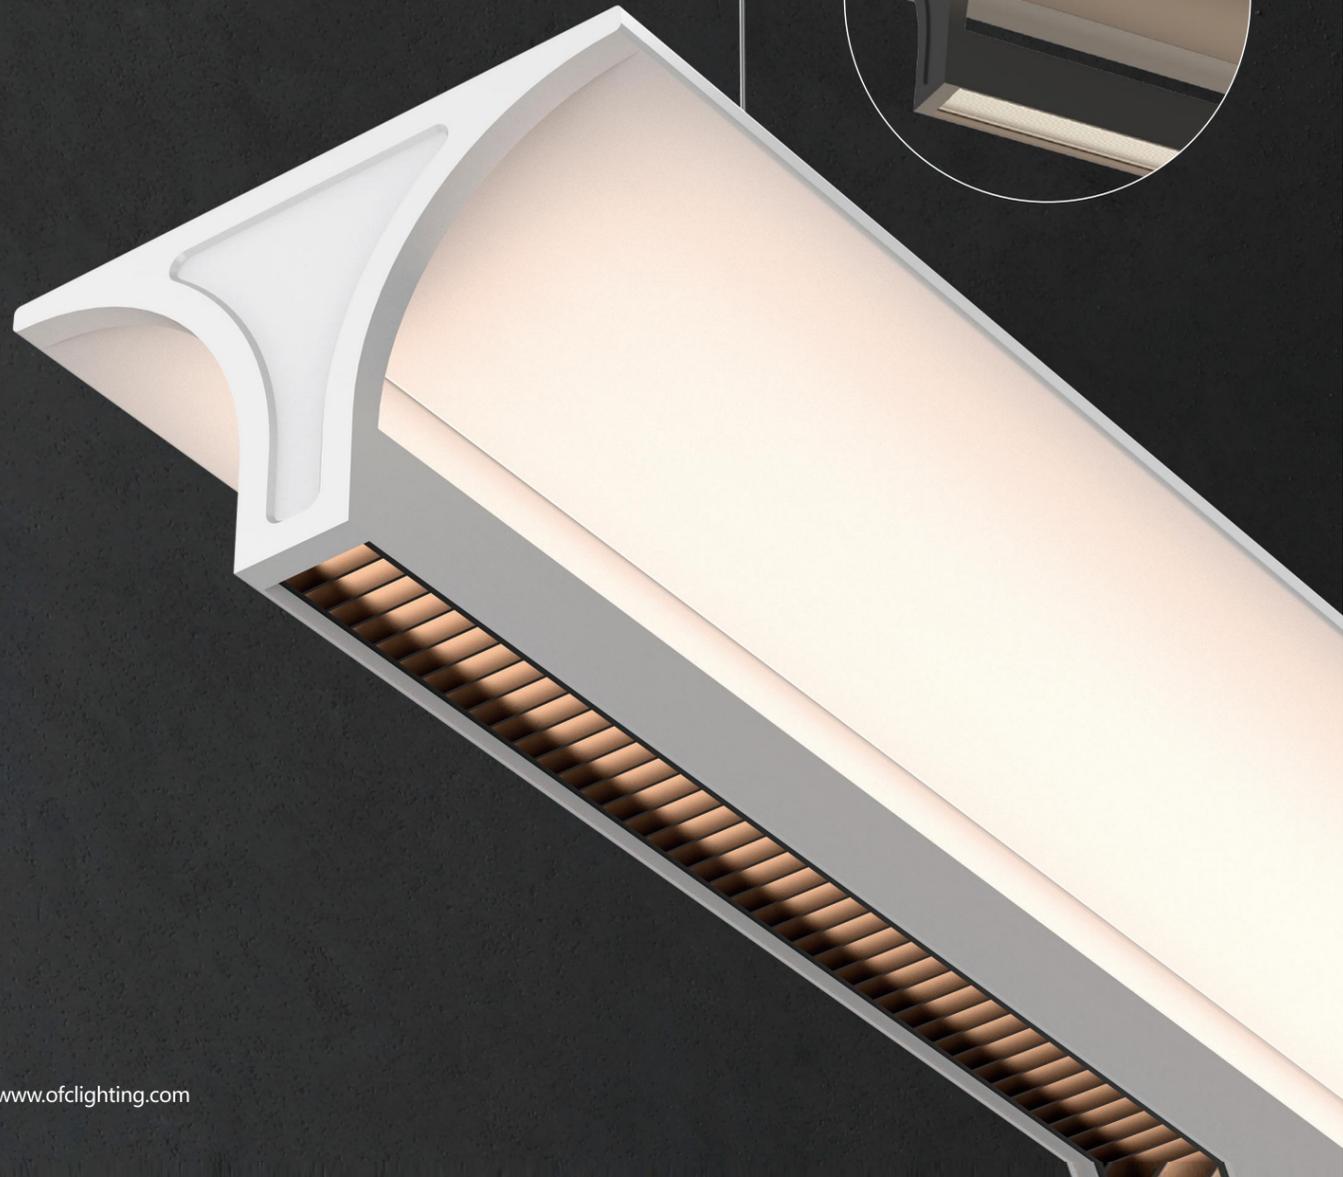


KD802




POWER	FLUX	SIZE	BEAM ANGLE
38W/M	> 95 lm/W	L1200×W210×H130mm L1500×W210×H130mm L2400×W210×H130mm	110°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	3000k/4000k/6000k		





1


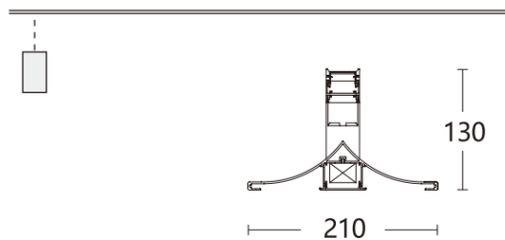


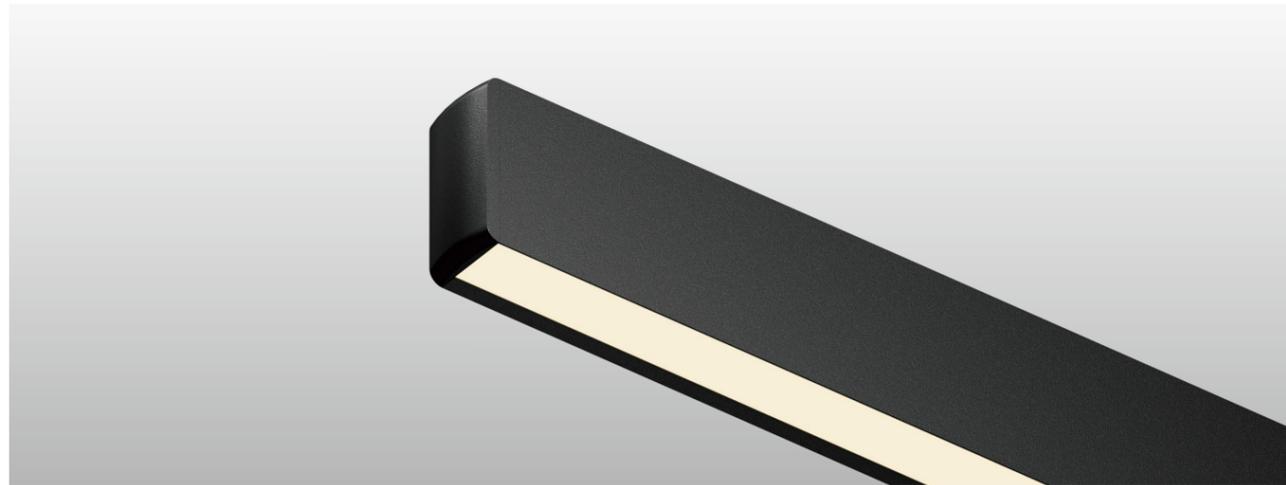


POWER	FLUX	SIZE	BEAM ANGLE
38W/M	> 95 lm/W	L1200×W43×H85mm L1500×W43×H85mm L2400×W43×H85mm	75°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	3000k/4000k/6000k		

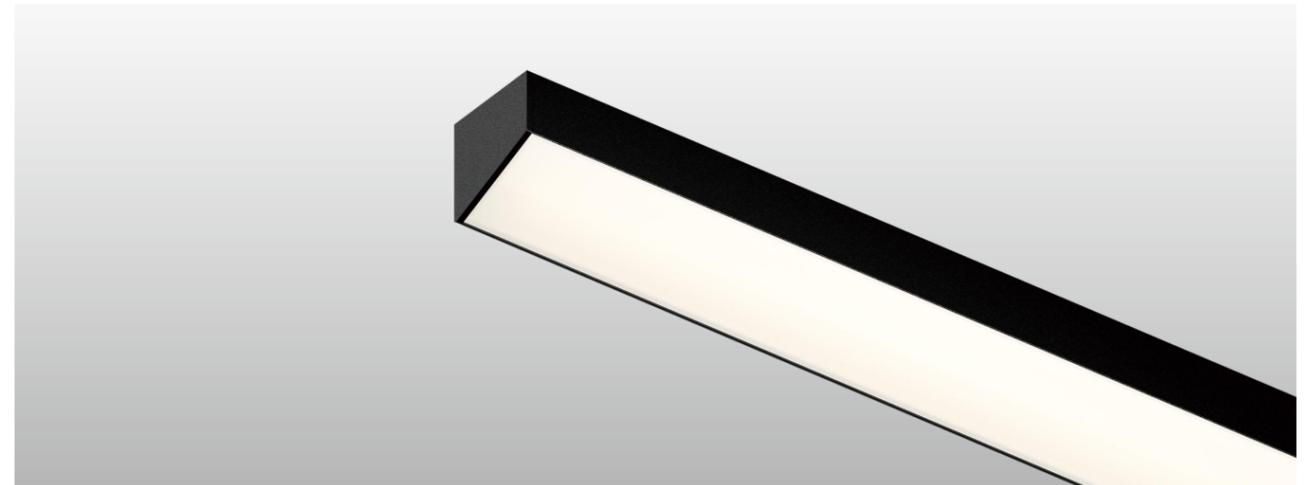

POWER	FLUX	SIZE	BEAM ANGLE
25W/M	> 95 lm/W	L1200×W50×H50/35mm L1500×W50×H50/35mm L2400×W50×H50/35mm	75°
ACCESSORIES AVAILABLE	CCT	LAMP BODY COLOR	
/	3000k/4000k/6000k		

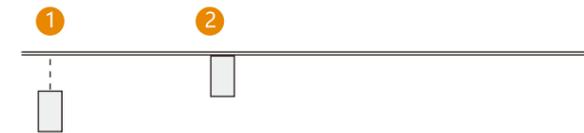

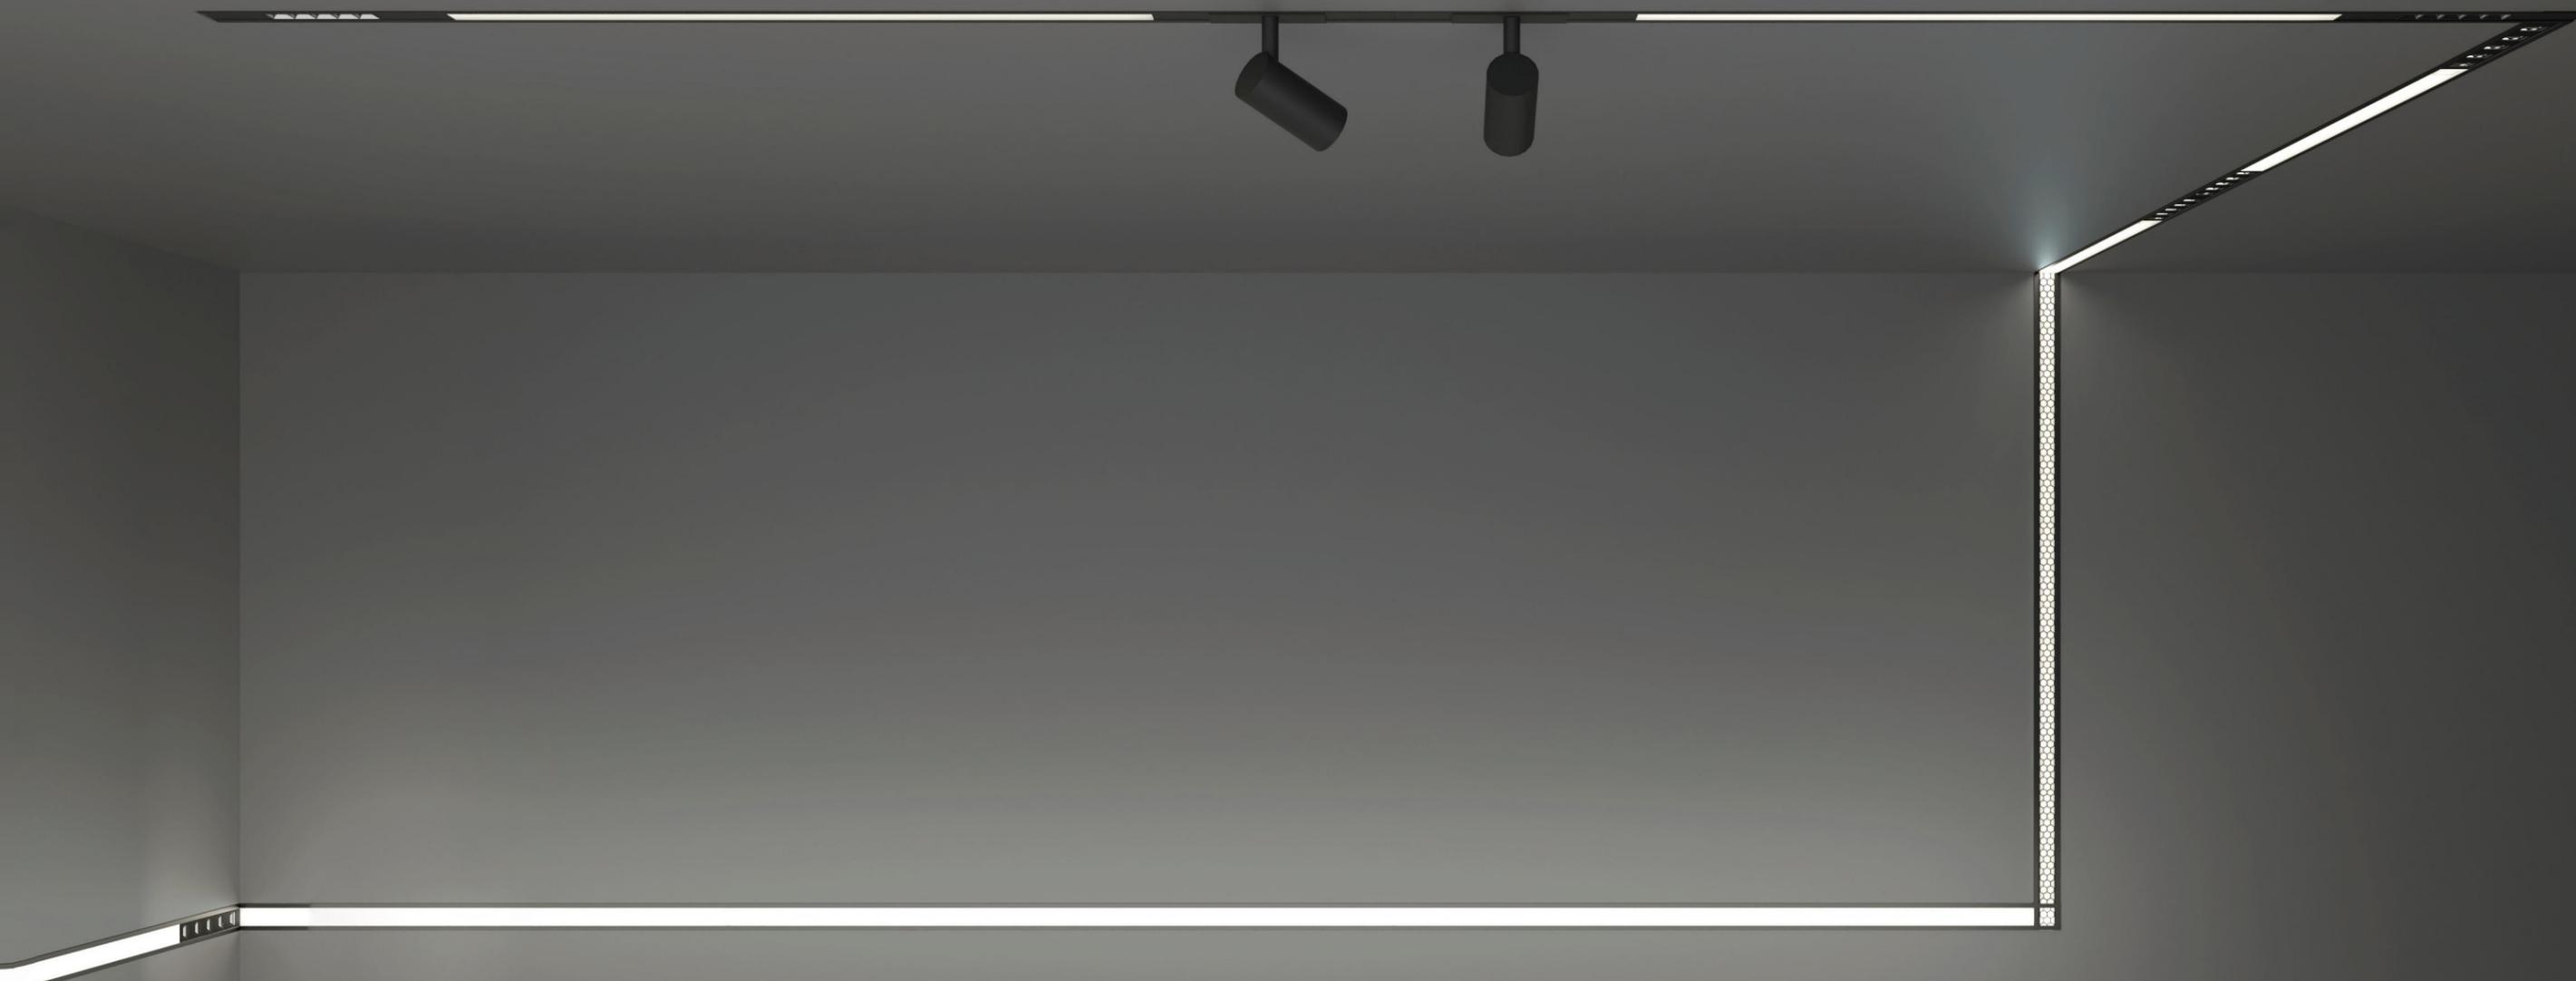

# TARA

塔拉·嵌装办公照明

## INSTALLATION MODE



## LIGHT DISTRIBUTION



嵌入式线性灯提供了干净、不间断的线条，并最大限度地扩大了房间内的空间。无论是在天花板上还是在墙上，都可以营造出一系列从戏剧性到宁静的情绪。


Recessed linear light offers clean, uninterrupted lines and maximises the space within a room. Whether it's on the ceiling or rebated into the wall, there is the ability to create a range of moods from dramatic to tranquil.

# MODULAR STRUCTURE

## 模块化结构

可增加光学配件来定制用户想要的个性化照明，更容易扩展且能适应更多的空间。

Optical accessories can be added to customize the personalized lighting the user wants, which is easier to expand and can fit into more spaces.

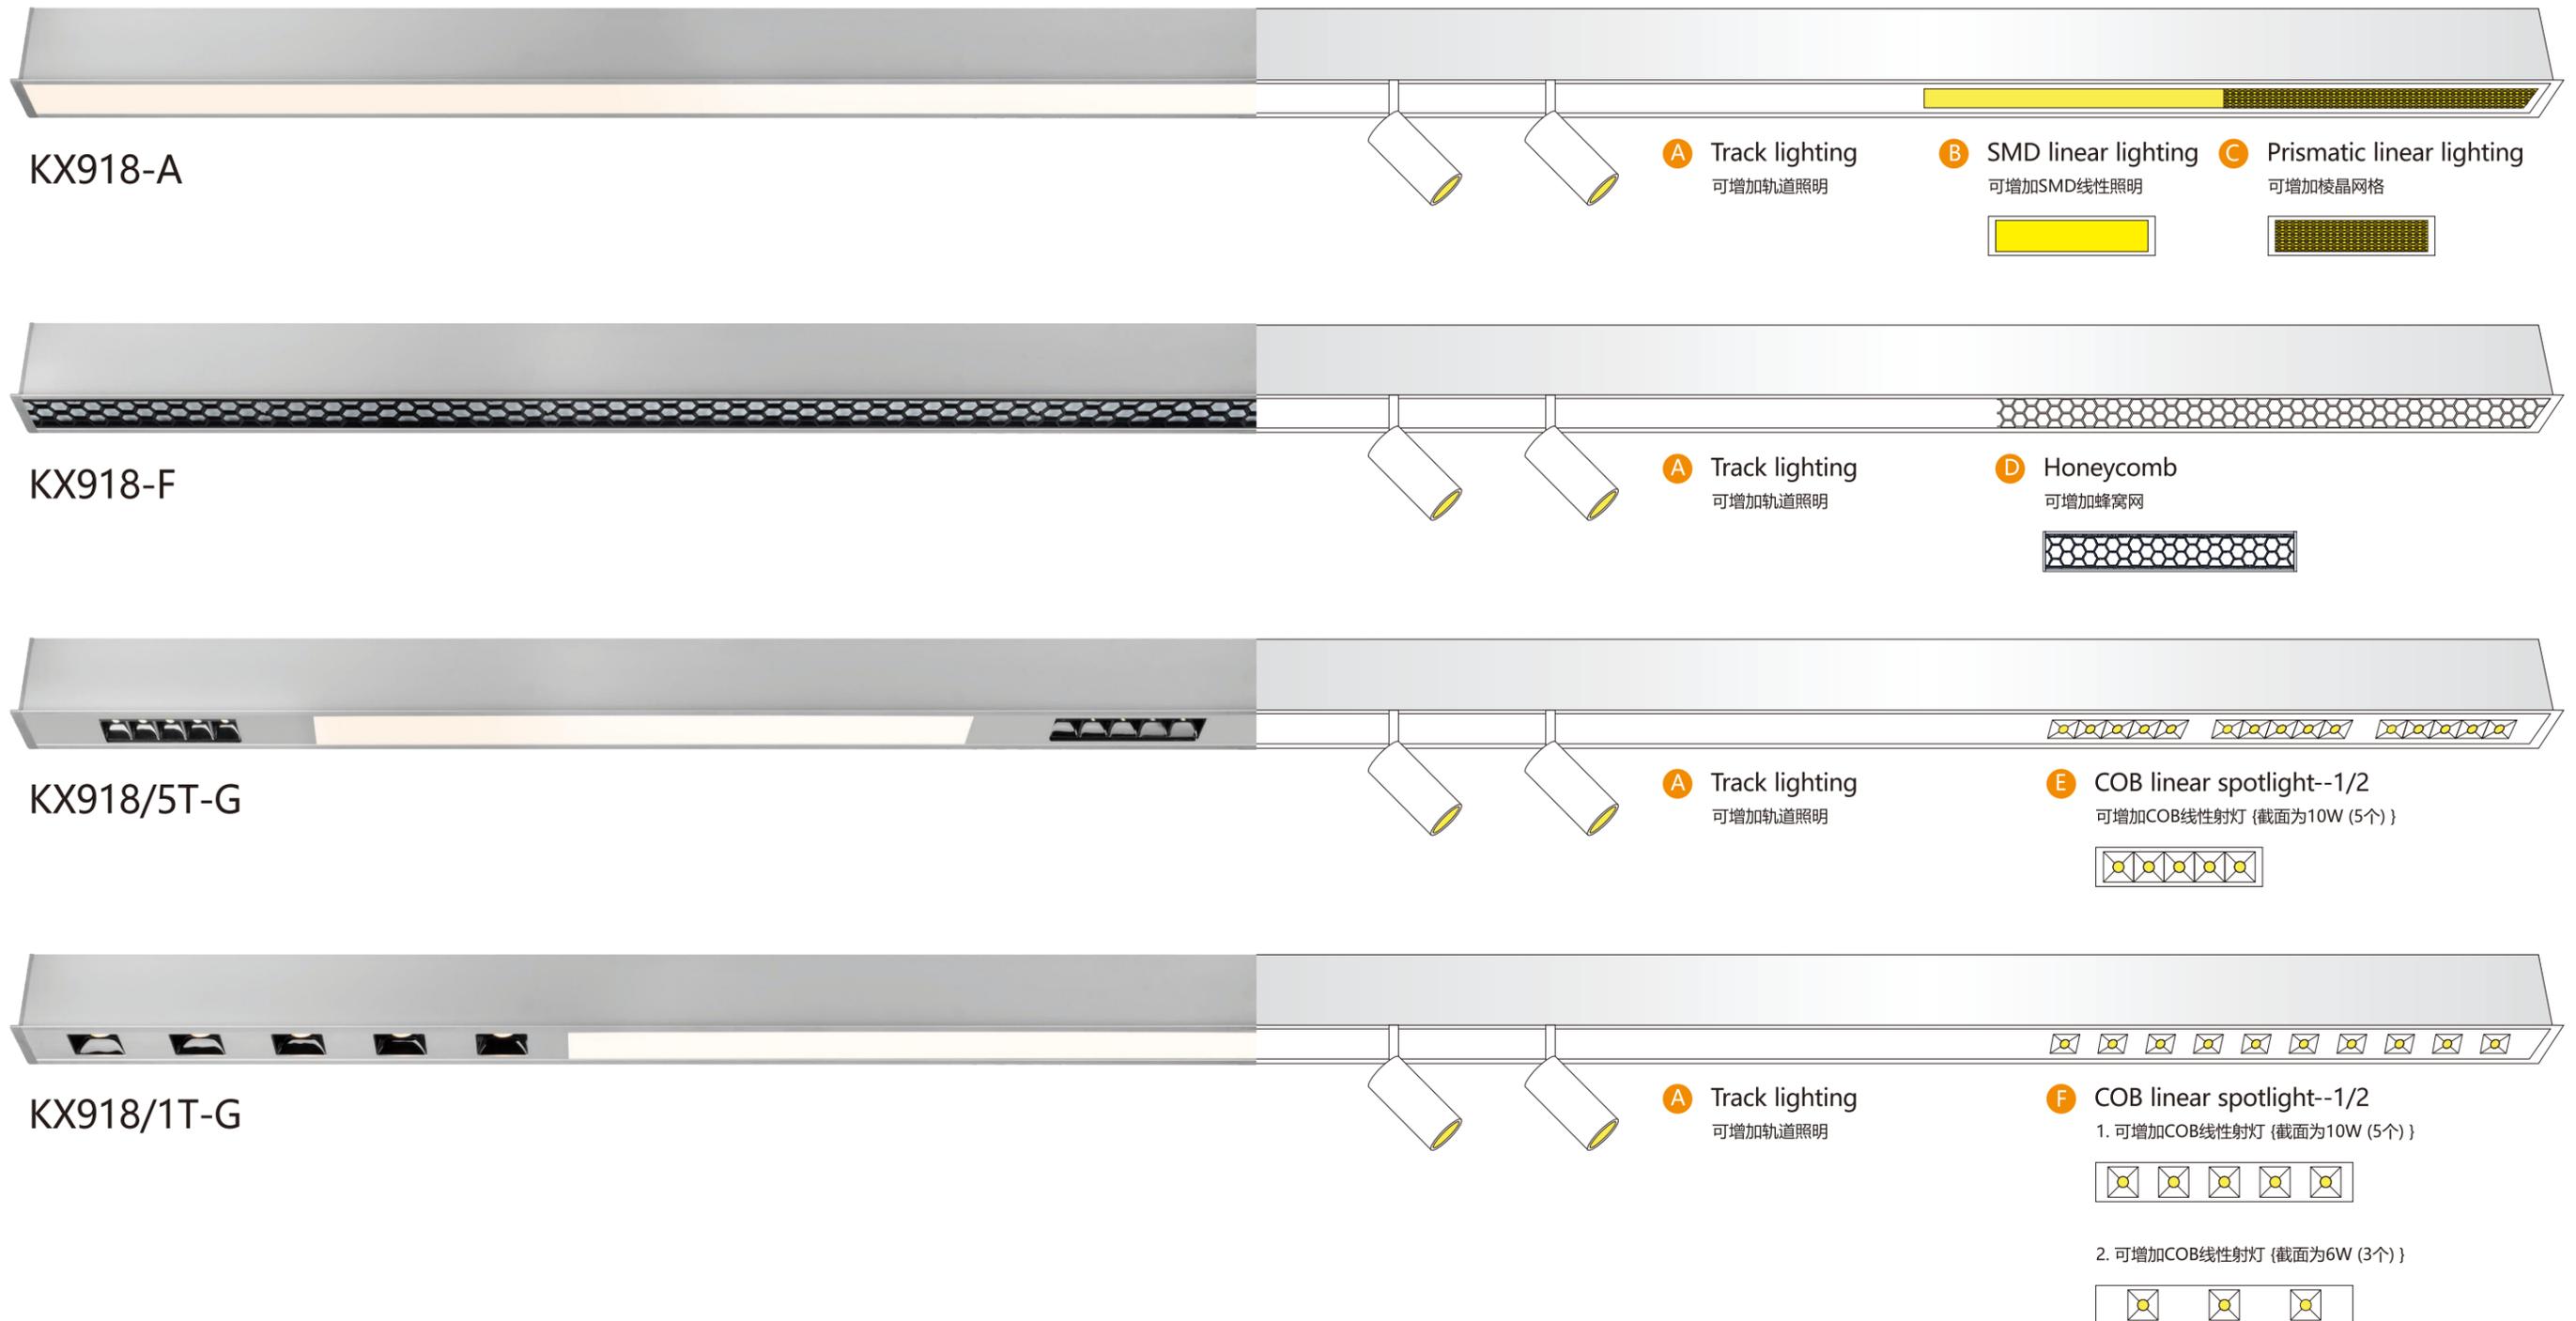




# TARA SERIES

KX14845 / KX20050

OFC照明具有灵活性，可以针对不同的用光环境做出相对应的照明方案，通过定制产品解决照明需求—无论你想要均匀洗墙还是重点照明。

OFC lighting has the flexibility to adapt to every new situation and react to changing requirements in a room - whether you want to evenly light an entire wall or accentuate a particular object.

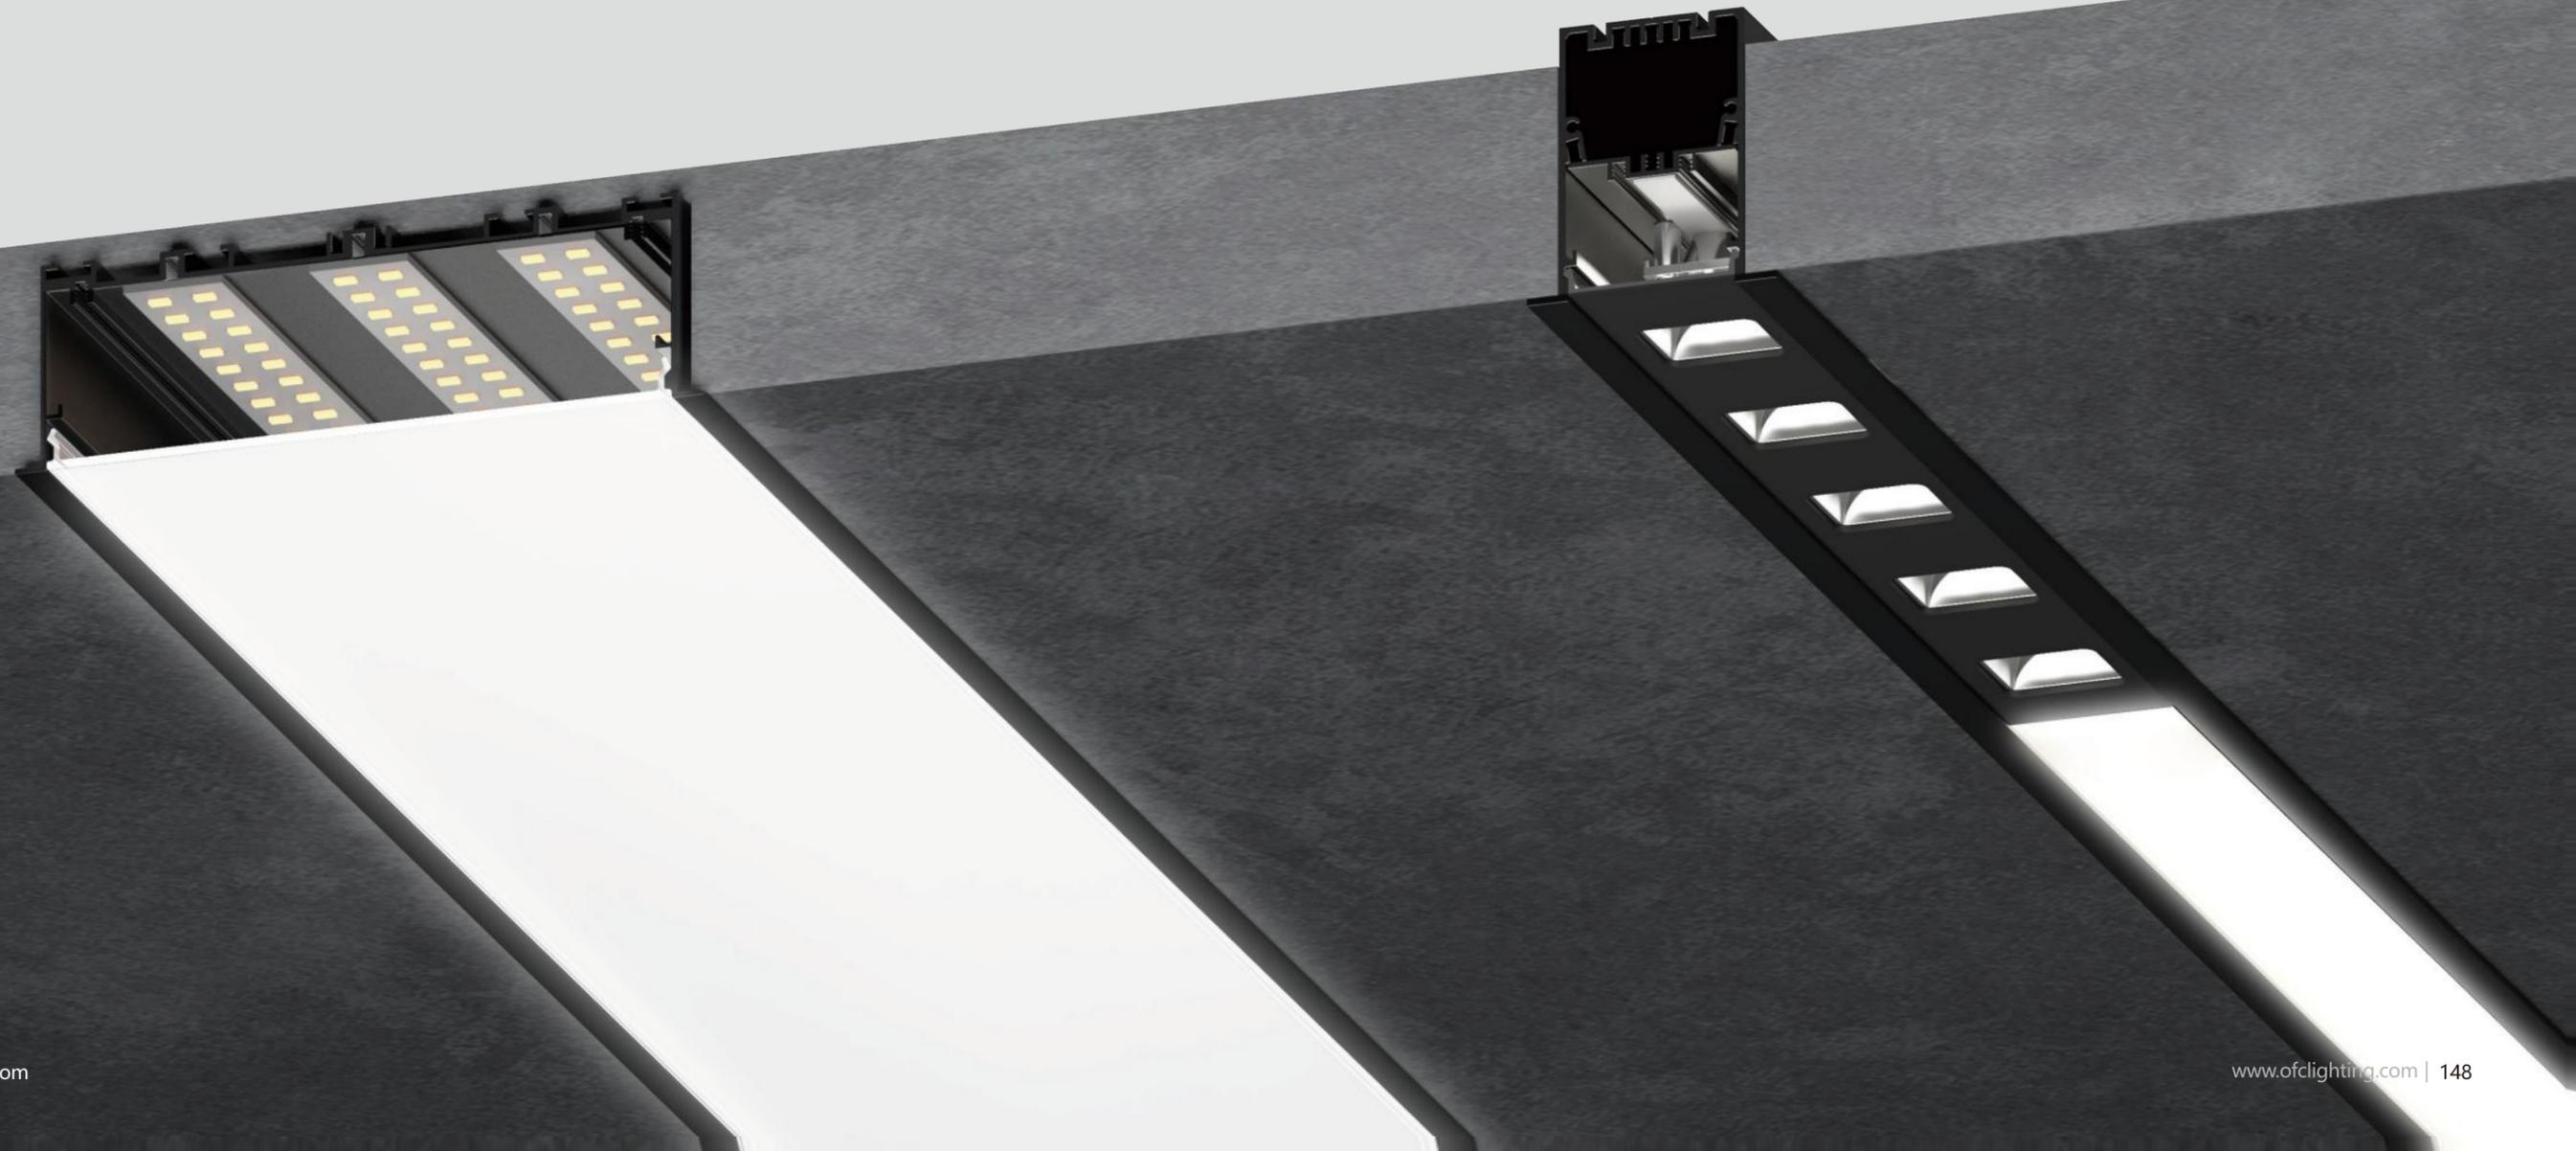

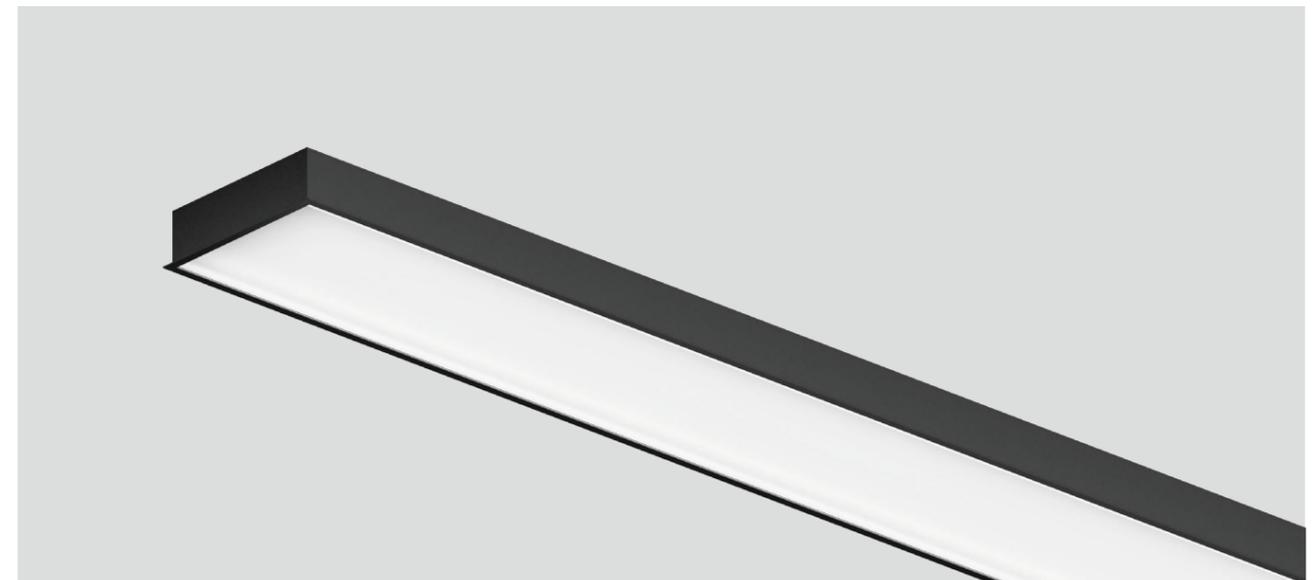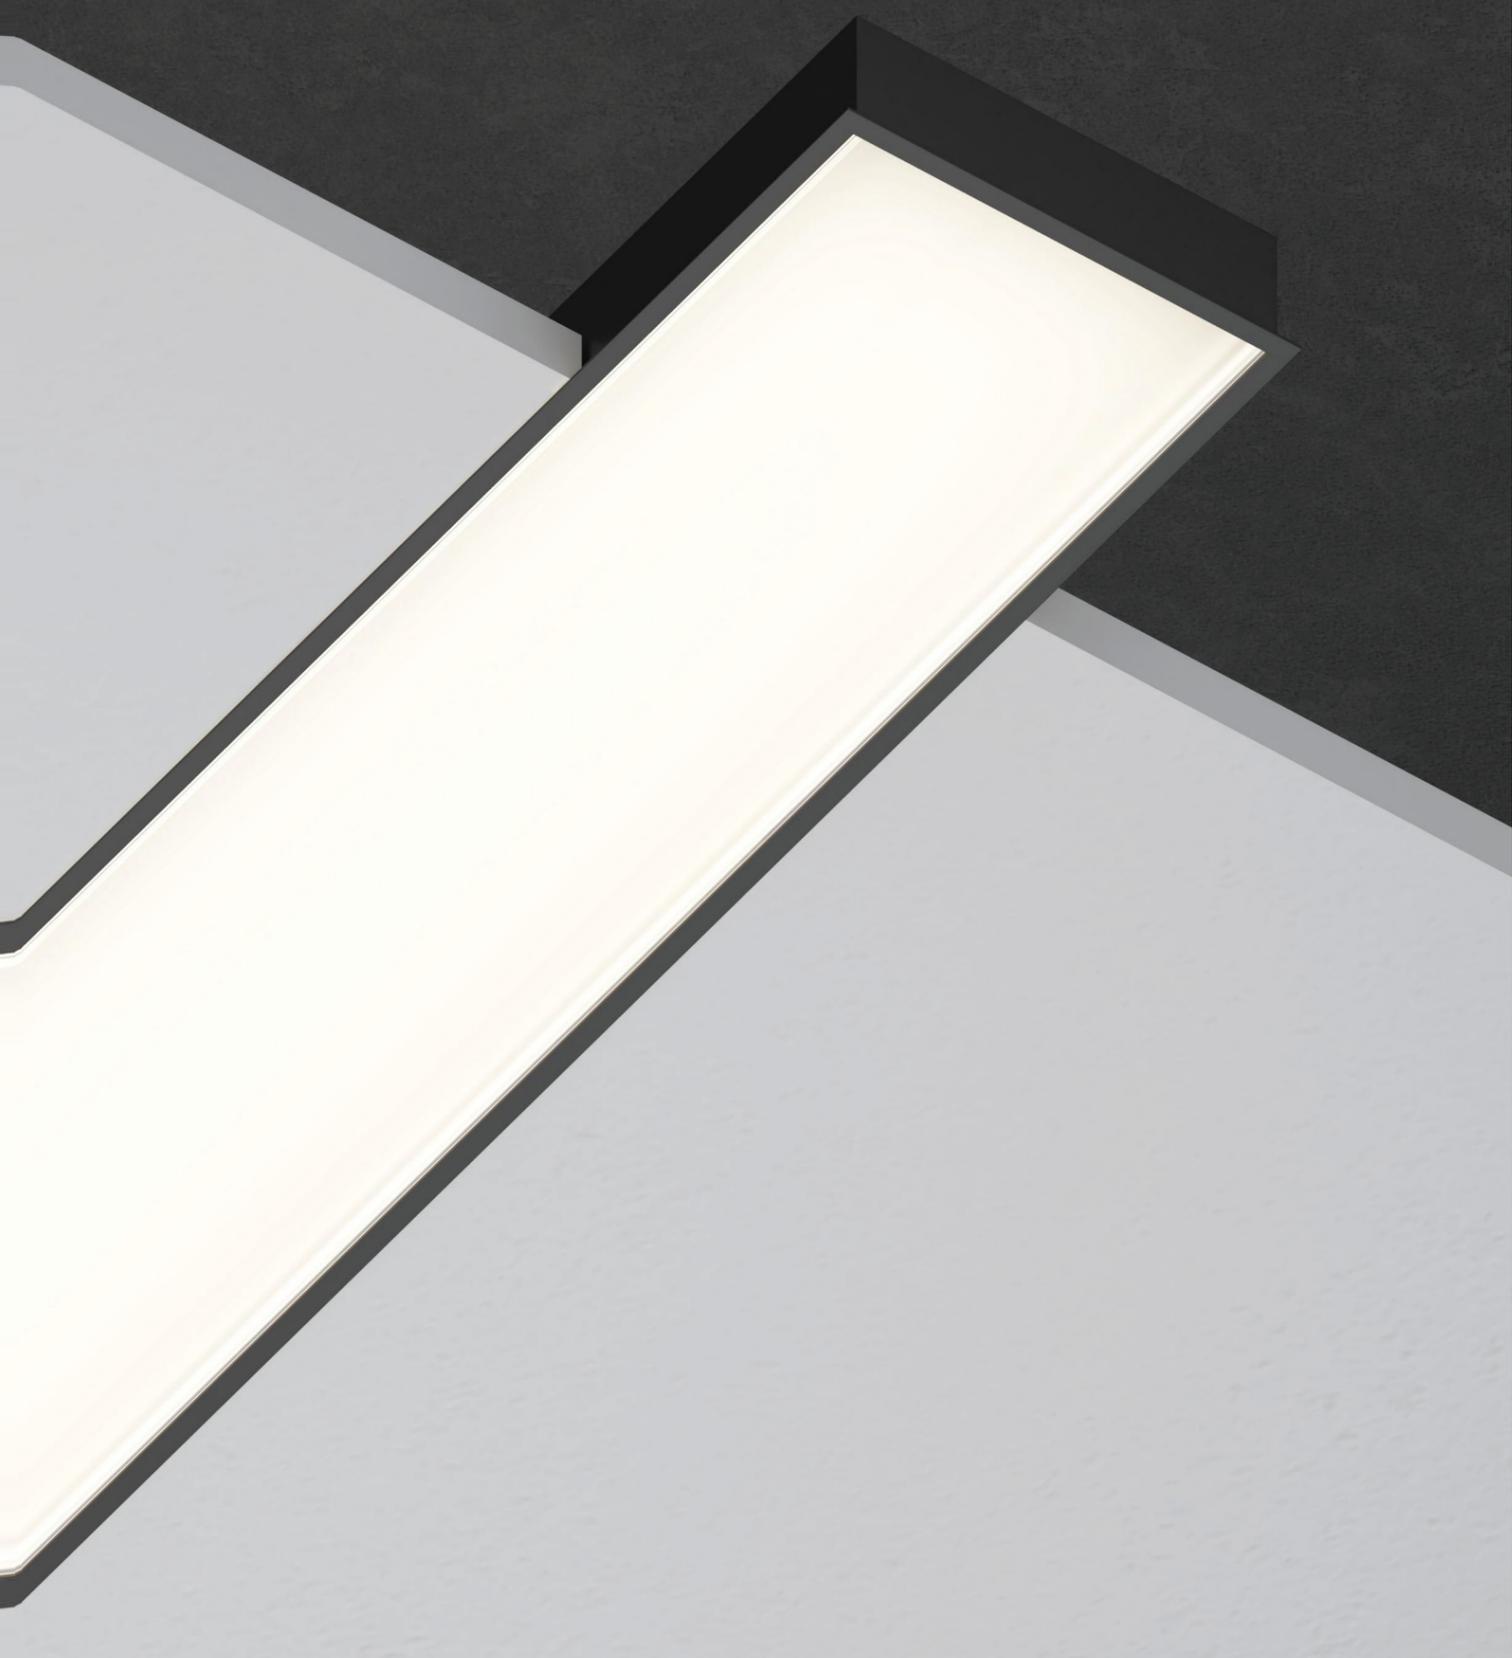

KX14845-A/KX14845-L

POWER	38W/M
FLUX	100-115 lm/W
SIZE	L×W160×H45mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

KX20050-A/KX20050-L


POWER	25W/M
FLUX	100-115 lm/W
SIZE	L×W200×H50mm
CCT	3000k/4000k/6000k
BEAM ANGLE	110°

TECHNICAL DETAILS

BODY MATERIAL	6063 Aluminum
DIFFUSER MATERIAL	PMMA
END CAP MATERIAL	Die casting aluminum
LAMP BODY COLOR	 MB MW SR SB SW WG


KX20050-A/KX20050-L

KX14845-A





KX20050-A




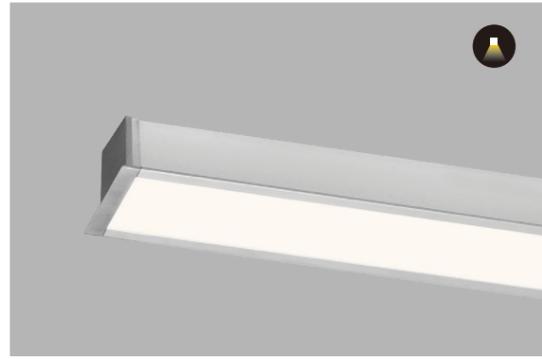



PRODUCT CODE	SIZE	POWER
KD918-A	L×W58×H66mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / SMD / Prismatic linear lighting		

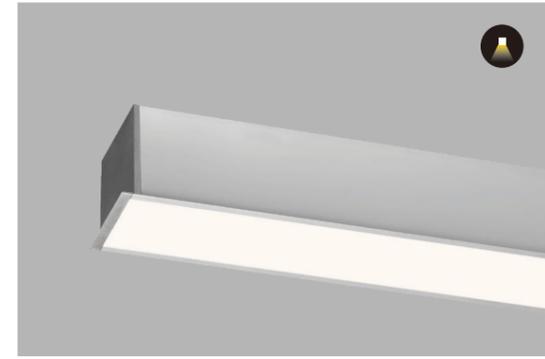


PRODUCT CODE	SIZE	POWER
KD913-A	L×W73×H82mm	25W/M
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / SMD / Prismatic linear lighting		





PRODUCT CODE	SIZE	POWER
KD918-F	L×W58×H66mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
ACCESSORIES AVAILABLE		
Track lighting / Honeycomb		

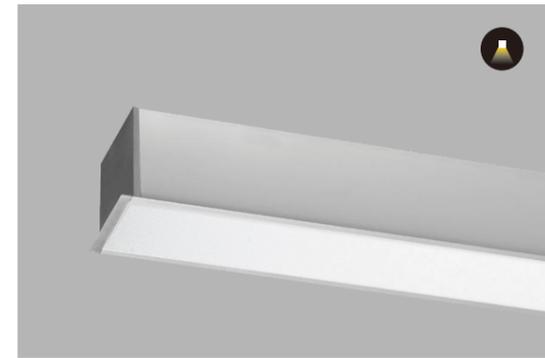


PRODUCT CODE	SIZE	POWER
KD904-F	L×W60×H82mm	25W/M
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k/6000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / Prismatic linear lighting Honeycomb		




PRODUCT CODE	SIZE	POWER
KD918/5T-G	L1200×W58×H66mm	35W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		

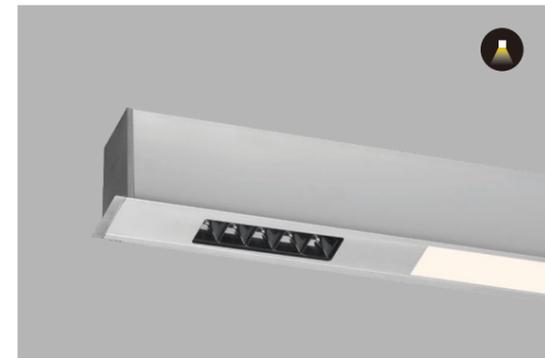


PRODUCT CODE	SIZE	POWER
KD913/5T-G	L1212×W60×H82mm	45W 55W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		




PRODUCT CODE	SIZE	POWER
KD918/1T-G	L1200×W58×H66mm	35W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		





PRODUCT CODE	SIZE	POWER
KD913/1T-G	L1212×W60×H82mm	33W 36W
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	95-105 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (3pcs)		





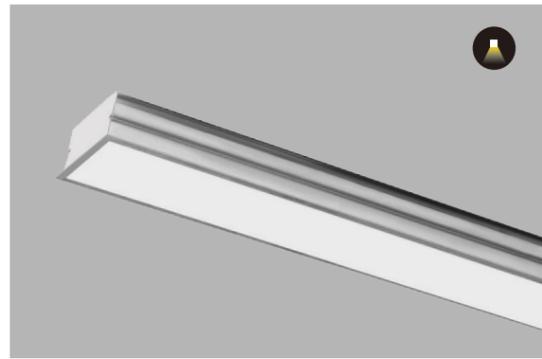

PRODUCT CODE	SIZE	POWER
KX16245	L×W160/150×H45mm	30W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	105-120 lm/W
ACCESSORIES AVAILABLE		
Track lighting / SMD / Prismatic linear lighting		

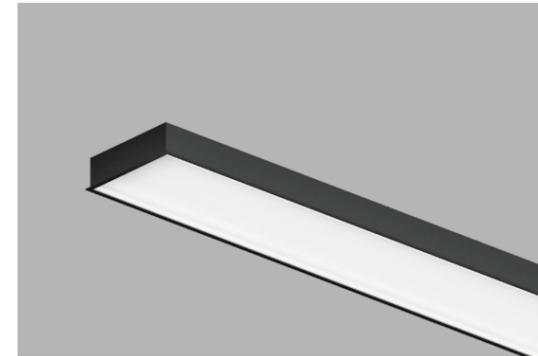



PRODUCT CODE	SIZE	POWER
KD117-A	L×W117/100×H35mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	100-115 lm/W
ACCESSORIES AVAILABLE		

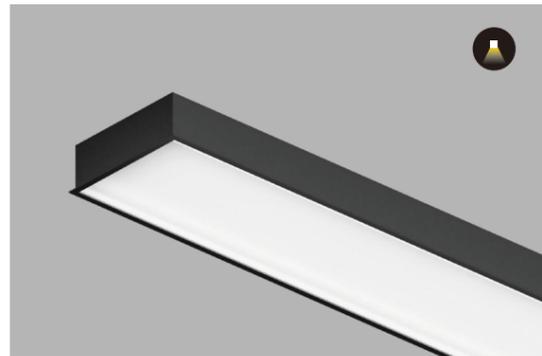



PRODUCT CODE	SIZE	POWER
KX12050	L×W136/120×H50mm	30W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	105-120 lm/W
ACCESSORIES AVAILABLE		
Track lighting / Honeycomb		





PRODUCT CODE	SIZE	POWER
KD105-A	L×W102/70×H55mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	100-115 lm/W
ACCESSORIES AVAILABLE		

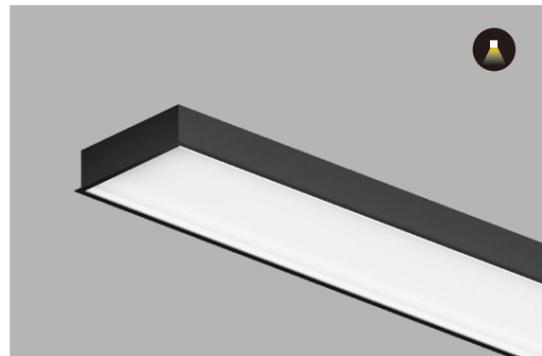



PRODUCT CODE	SIZE	POWER
KX10050	L1200×W112/98×H50mm	30W/M
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	105-120 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		

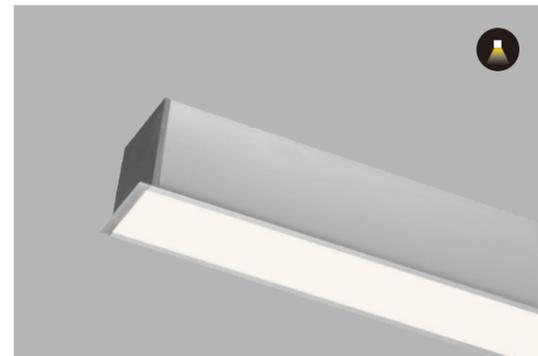


PRODUCT CODE	SIZE	POWER
KX5050	L1200×W60/50×H50mm	30W/M
BEAM ANGLE	CCT	FLUX
15°/30°/45°	3000k/4000k	105-120 lm/W
ACCESSORIES AVAILABLE		
Track lighting / COB (5pcs)		

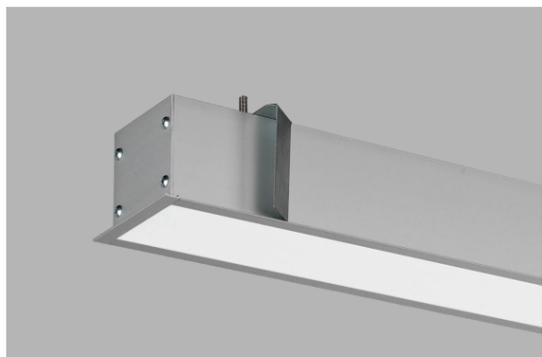


PRODUCT CODE	SIZE	POWER
KX909	L×W100/80×H80mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	100-115 lm/W
ACCESSORIES AVAILABLE		

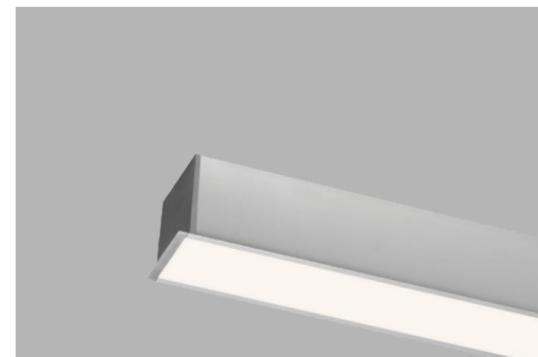


PRODUCT CODE	SIZE	POWER
Kx5035	L×W65/50×H35mm	25W/M
BEAM ANGLE	CCT	FLUX
	3000k/4000k/6000k	100-115 lm/W
ACCESSORIES AVAILABLE		






PRODUCT CODE	SIZE	POWER
KD517-A	L×W44×H3mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	80-95 lm/W
		
ACCESSORIES AVAILABLE		
/		





PRODUCT CODE	SIZE	POWER
KD617-A	L×W65×H34mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
		
ACCESSORIES AVAILABLE		
/		



PRODUCT CODE	SIZE	POWER
KD917-A	L×W88×H34mm	25W/M
BEAM ANGLE	CCT	FLUX
110°	3000k/4000k/6000k	95-105 lm/W
		
ACCESSORIES AVAILABLE		
/		

LAMP BODY COLOR: MB (Black), MW (White), SR (Silver), SB (Black), SW (Grey), WG (Wood Grain)

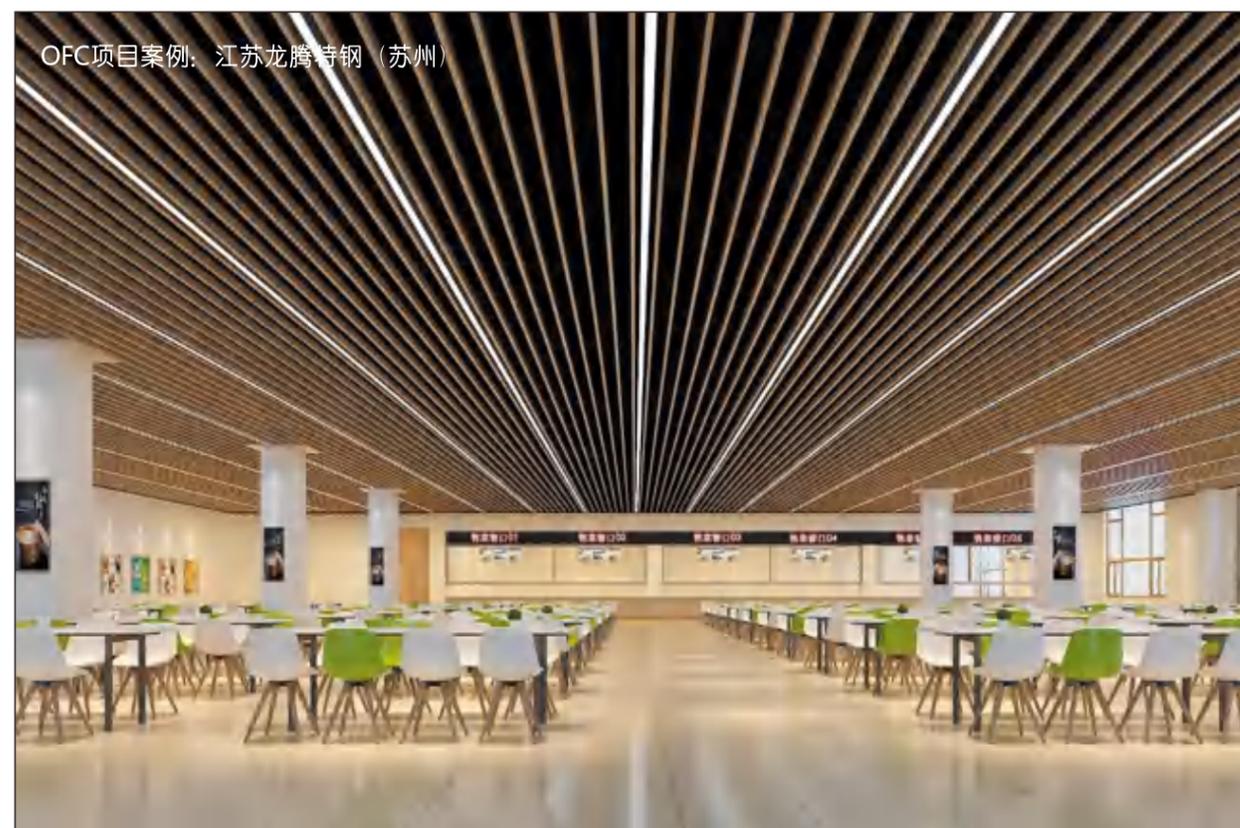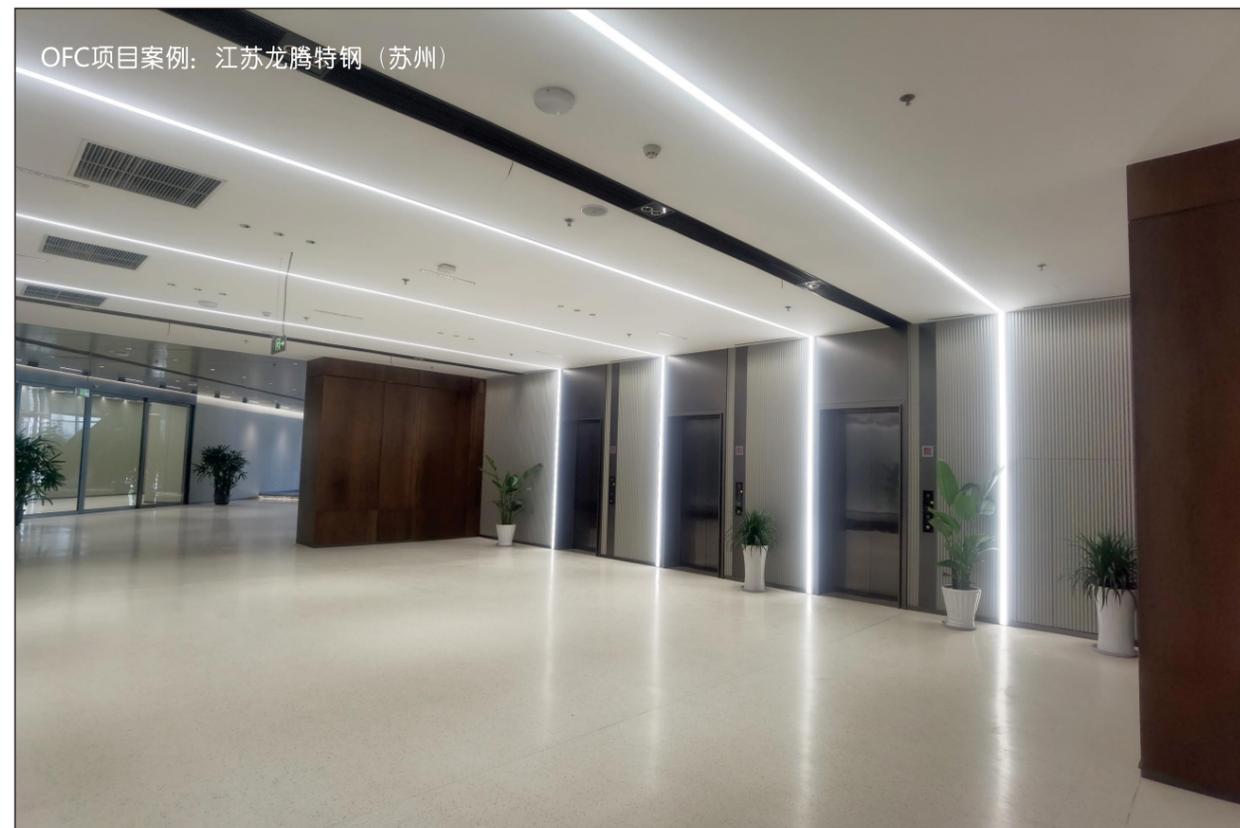

# DJANA

## 蒂嘉娜·洗墙灯

适用于机场、高铁站、商店、展厅、家庭、办公室、学校、工厂、医院、图书馆、超市、地铁、酒店、餐厅等场所。产品节能寿命长。

Suitable for airports, high-speed rail stations, shops, exhibition halls, families, offices, schools, factories, hospitals, libraries, supermarkets, subways, hotels, restaurants, etc., the product energy-saving long life.



INSTALLATION MODE





LIGHT DISTRIBUTION







蒂嘉娜系列拥有多种的安装方式，可根据需求搭配适当的洗墙照明效果，营造丰富的光影层次来展现空间独特的文化底蕴。广泛应用于酒店、会所、精品地产、商业综合体等空间。


Djana series has a variety of installation methods, can be matched according to the needs of the appropriate wall washing lighting effect, create a rich light and shadow layers to show the unique cultural heritage of the space. Widely used in hotels, clubs, boutique real estate, commercial complexes and other spaces.

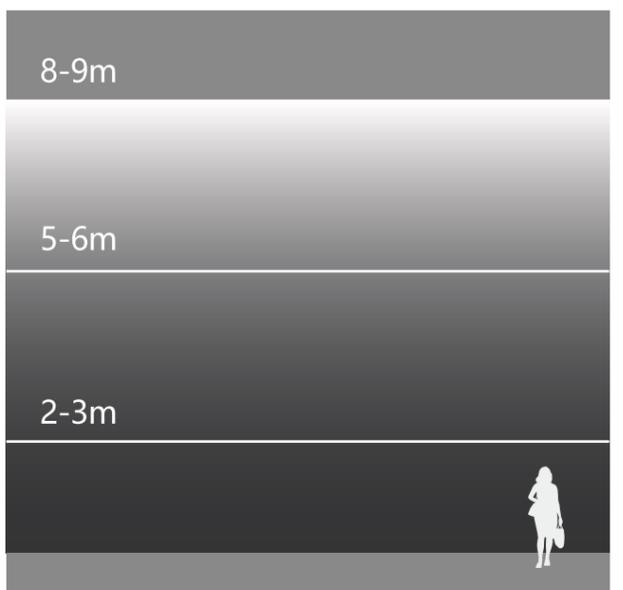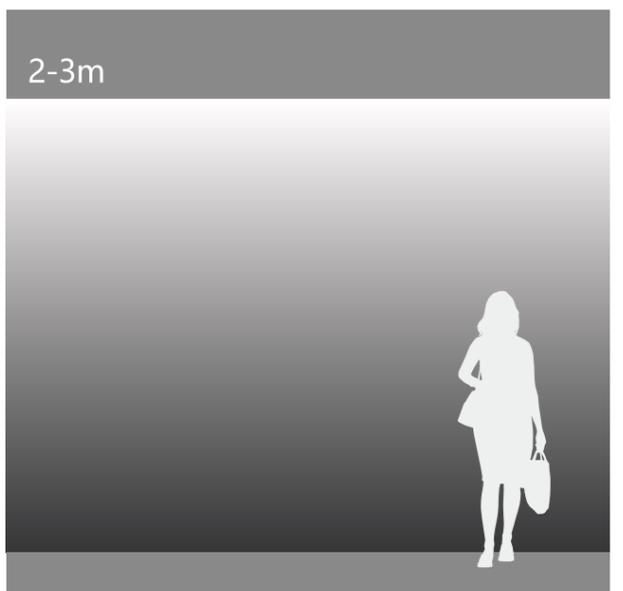


# Installation 安装方式

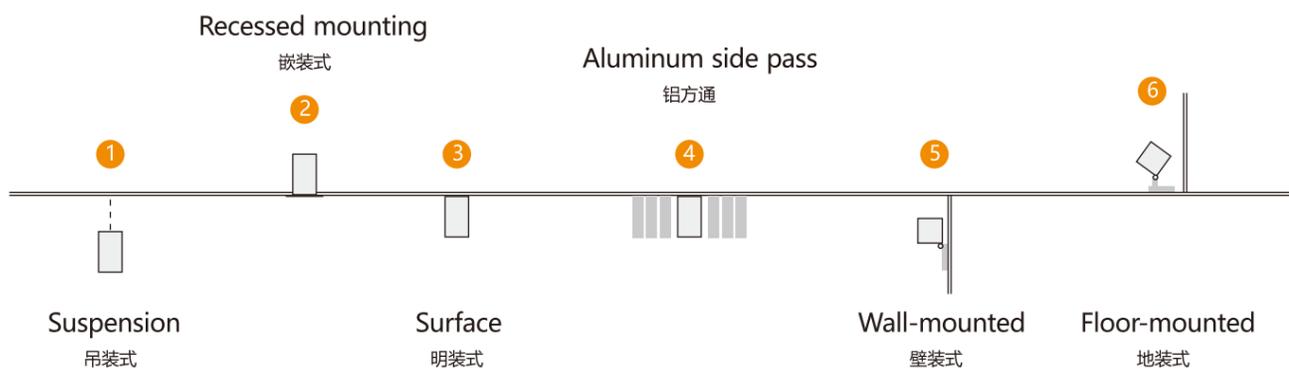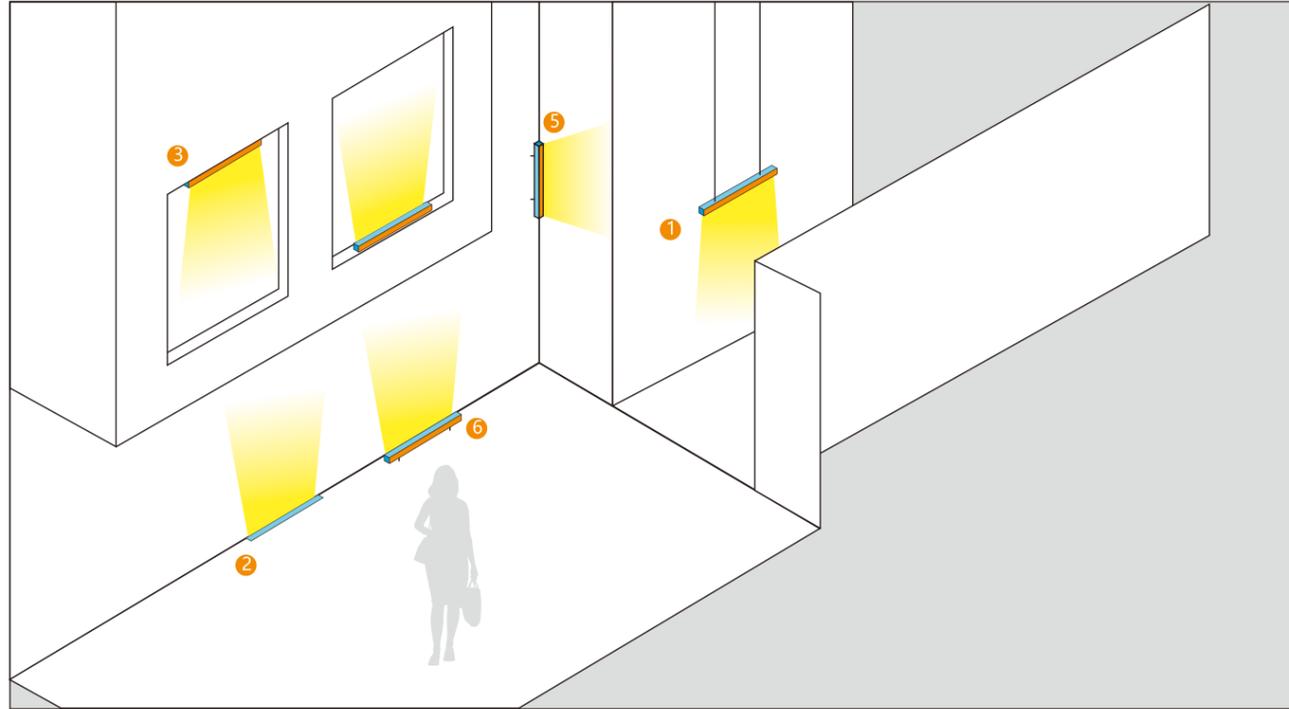


Surface  
明装式

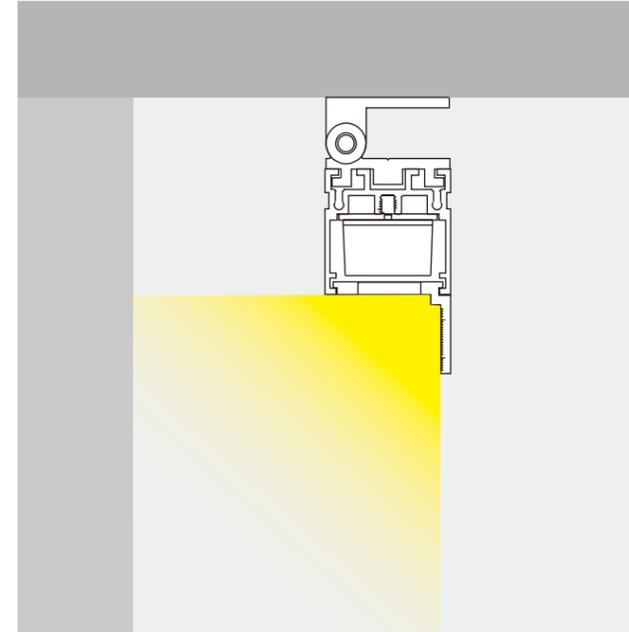


Aluminum side pass  
铝方通

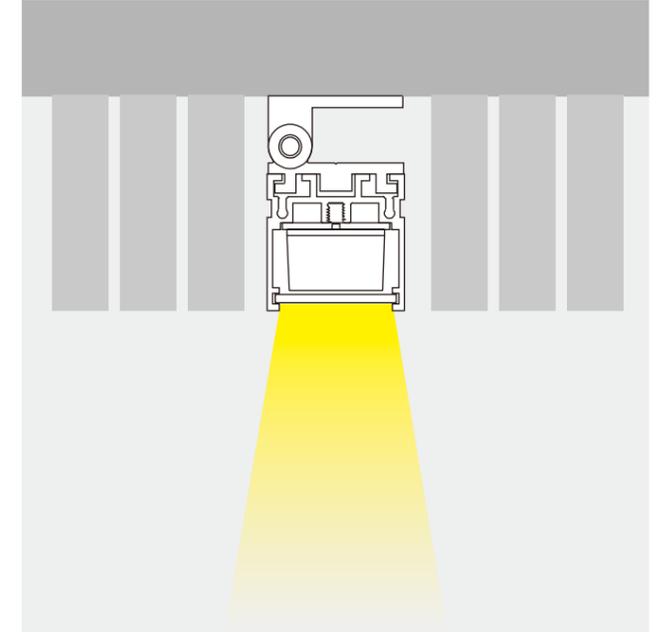


Wall-mounted  
壁装式

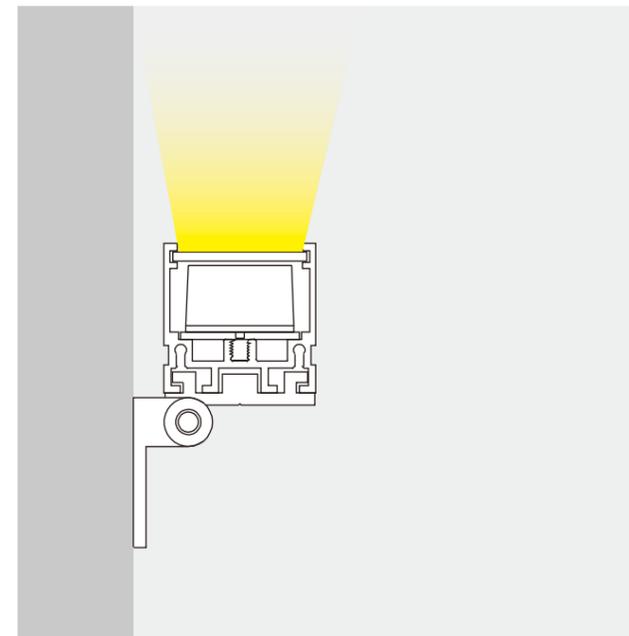


Floor-mounted  
地装式

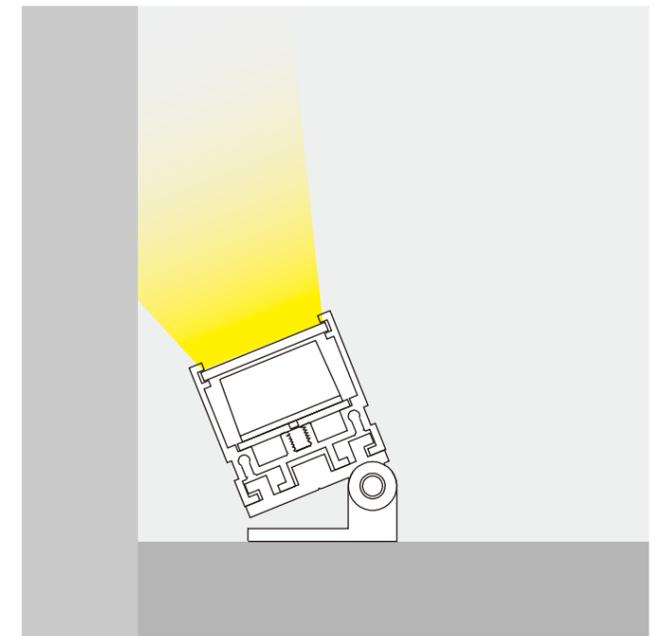


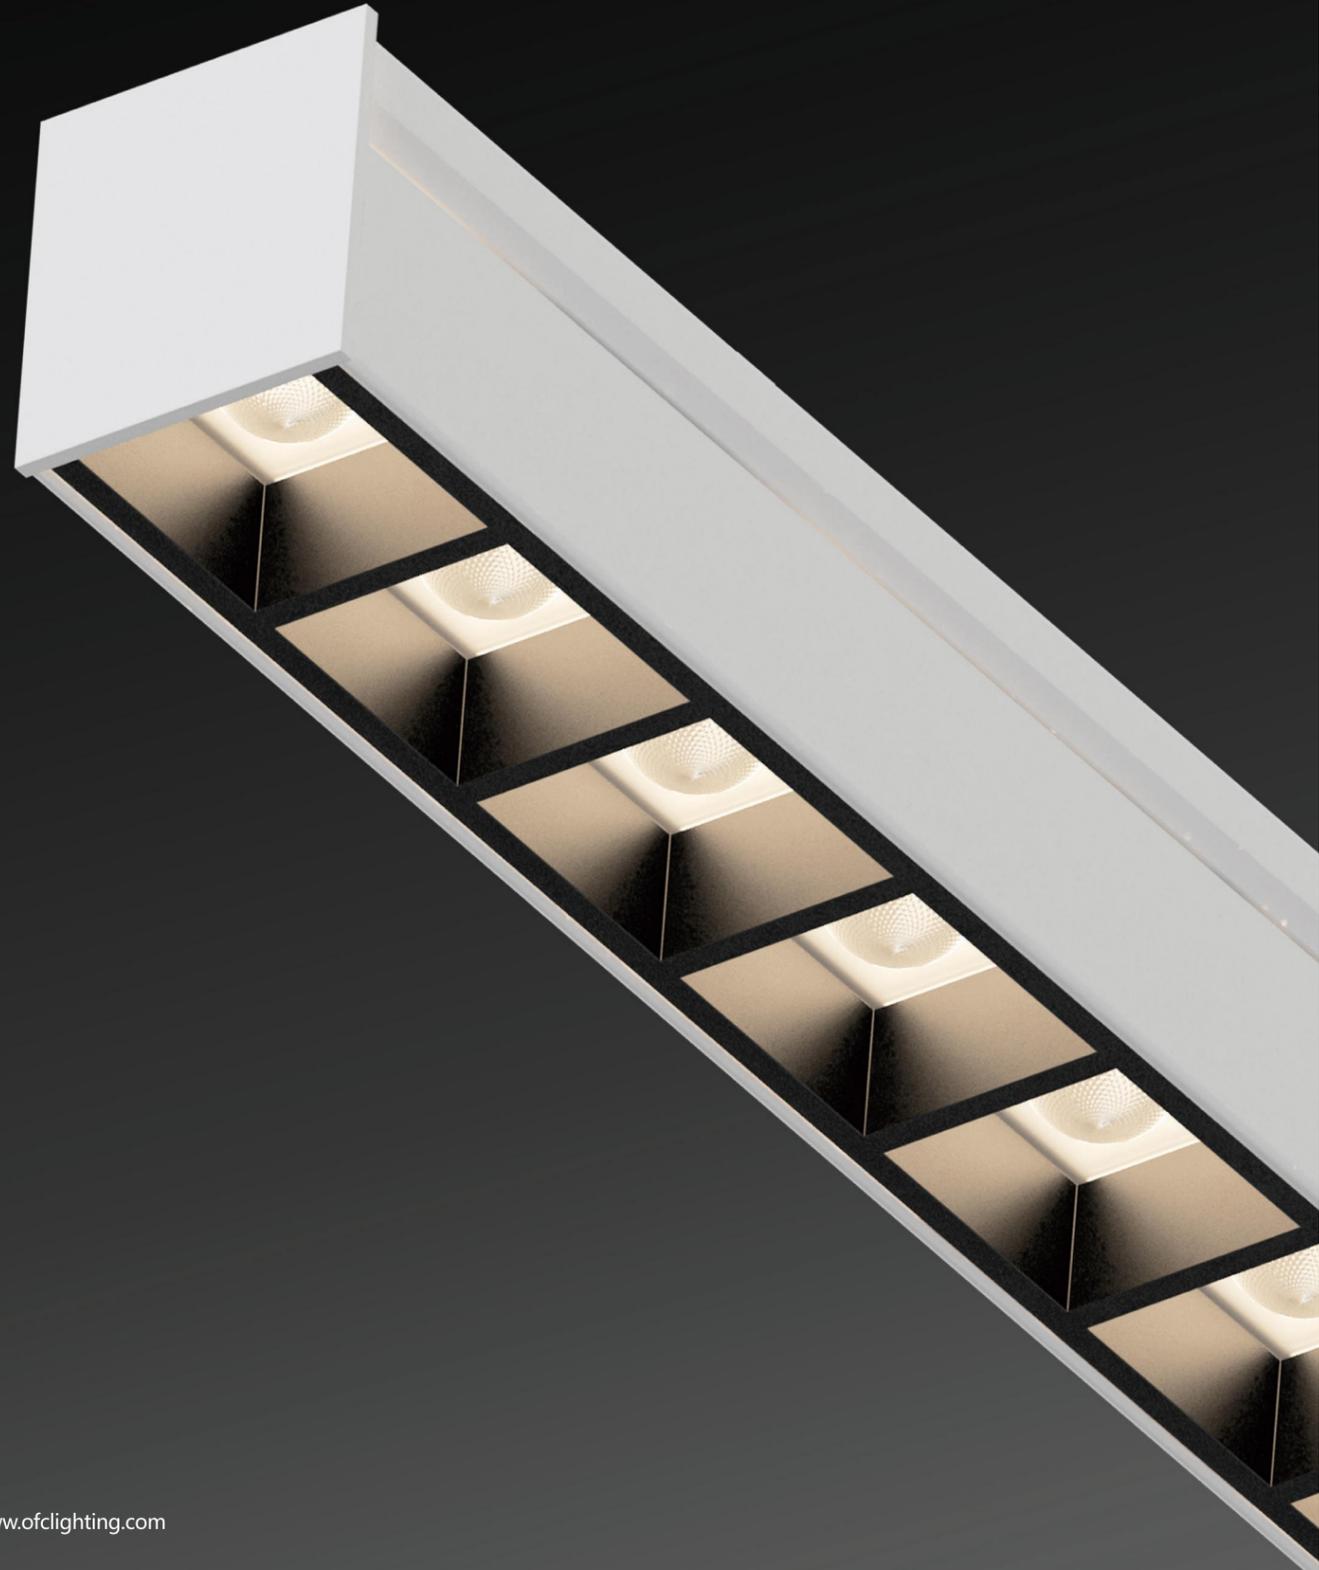

KD925-G 

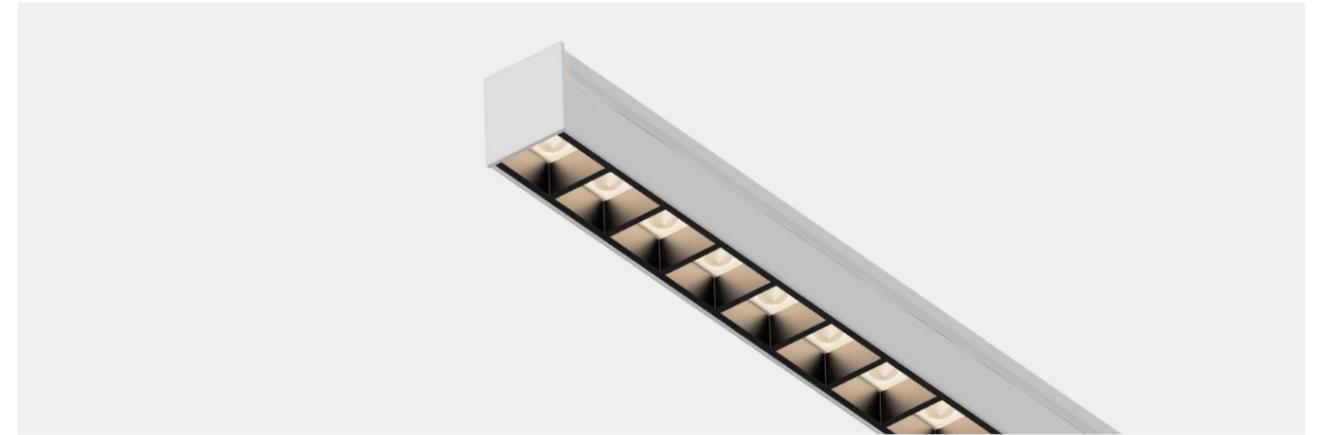


POWER	FLUX	SIZE	BEAM ANGLE
20W/M	95 lm/W	L×W21×H22mm	50°
INSTALLATION MODE	CCT		LAMP BODY COLOR
Surface	3000k/4000k		



KD925S-G 





POWER	FLUX	SIZE	BEAM ANGLE
20W/M	95 lm/W	L×W21×H38mm	50°
INSTALLATION MODE	CCT		LAMP BODY COLOR
Surface	3000k/4000k		







PRODUCT CODE	SIZE	POWER
KX923-G	L998×W60×H40.5mm	24W
	L1495×W60×H40.5mm	36W
	L1992×W60×H40.5mm	48W
BEAM ANGLE	CCT	FLUX
10°×45°/20°×33° 30°×40°/40°/60°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Recessed		

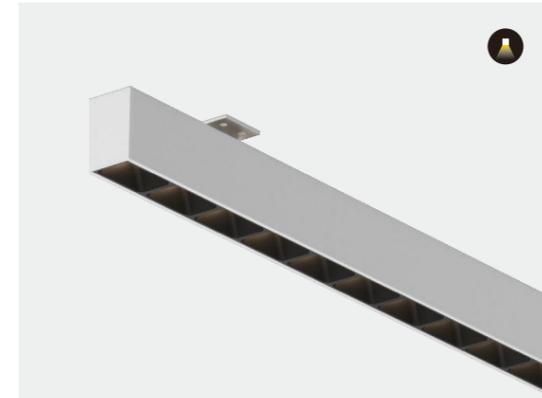

PRODUCT CODE	SIZE	POWER
KD927-G	L1002×W31×H45mm	24W
	L1499×W31×H45mm	36W
	L1996×W31×H45mm	48W
BEAM ANGLE	CCT	FLUX
15°/40°/20°×45°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Surface / Aluminum side pass / Wall-mounted Floor-mounted		





PRODUCT CODE	SIZE	POWER
KD924-G	L1002×W56.4×H80mm	24W
	L1499×W56.4×H80mm	36W
	L1996×W56.4×H80mm	48W
BEAM ANGLE	CCT	FLUX
10°×45°/20°×33° 30°×40°/40°/60°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Suspended / Recessed / Surface Aluminum side pass		




PRODUCT CODE	SIZE	POWER
KX928-G	L1002×W40×H45mm	24W
	L1509×W40×H45mm	36W
	L2007×W40×H45mm	48W
BEAM ANGLE	CCT	FLUX
15°/40°/20°×45°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Suspended / Recessed / Surface Aluminum side pass		



PRODUCT CODE	SIZE	POWER
KD926-G	L1002×W25×H40mm	24W
	L1499×W25×H40mm	36W
	L1996×W25×H40mm	48W
BEAM ANGLE	CCT	FLUX
15°/40°/20°×45°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Surface / Aluminum side pass / Wall-mounted Floor-mounted		

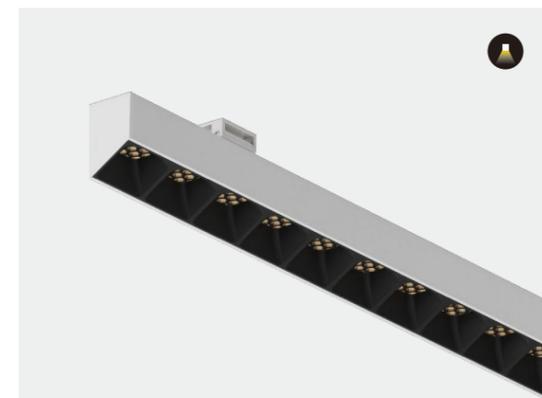

PRODUCT CODE	SIZE	POWER
KD929-G	L1002×W31×H45mm	24W
	L1499×W31×H45mm	36W
	L1996×W31×H45mm	48W
BEAM ANGLE	CCT	FLUX
15°/40°/20°×45°	3000k/4000k	90 lm/W
INSTALLATION MODE		
Surface / Aluminum side pass / Wall-mounted Floor-mounted		





# WOLF

## 沃尔夫·集成灯带

空调出风口与照明的结合，使出风口更加美观。根据不同的需要，可安装不同的功能模块，如照明、感应、消防、监控等。有双边发光、单边发光、不发光三种规格可供选择。长度和宽度均可定制，适合各种工装空间。


The combination of air conditioning outlet and lighting makes the air outlet more beautiful. According to different needs, different functional modules can be installed, such as lighting, induction, fire protection, monitoring and so on. There are two side light, single side light, non-light three specifications to choose from. Length and width can be customized to fit a variety of tooling spaces.

### INSTALLATION MODE




### LIGHT DISTRIBUTION



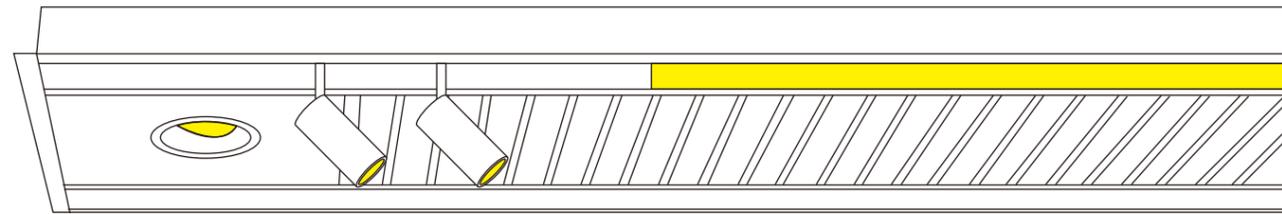


**A** Track lighting  
可增加轨道照明

**B** SMD linear lighting  
可增加SMD线性照明

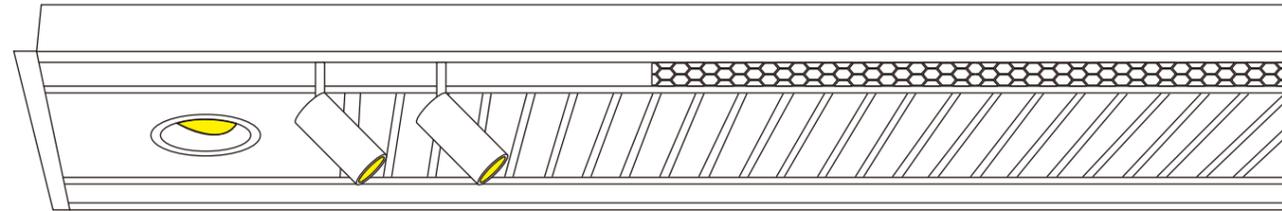



**A** Track lighting  
可增加轨道照明

**C** Honeycomb  
可增加蜂窝网

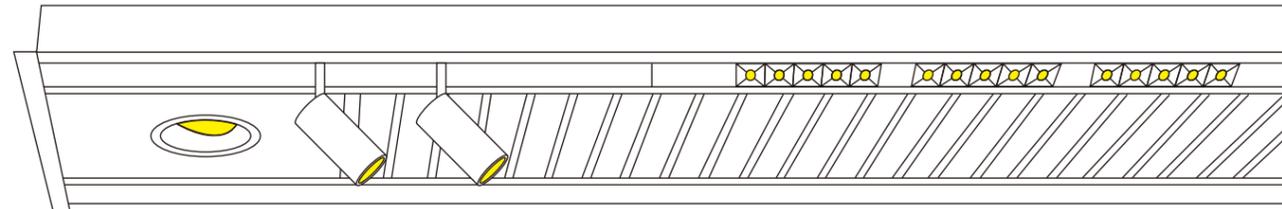

**A** Track lighting  
可增加轨道照明

**D** COB linear spotlight--1/2  
可增加COB线性射灯 (截面为10W (5个))

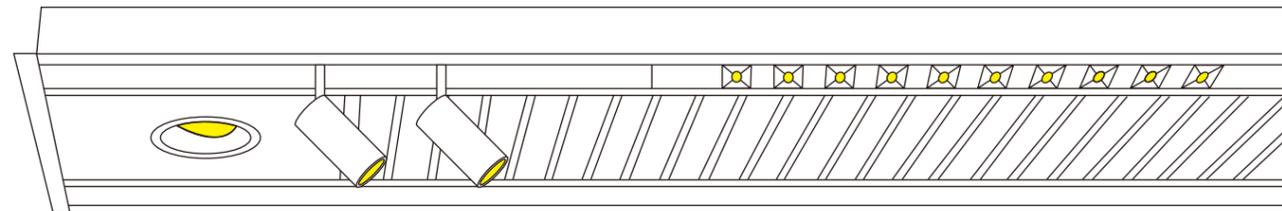

**A** Track lighting  
可增加轨道照明

**E** COB linear spotlight--1/2  
可增加COB线性射灯 (截面为10W (5个))



# Equipment replaceable 设备可替换



Alarm  
报警器



Monitoring aids  
喷淋头



Sensors  
感应器



L  
灯具

More...  
更多扩展

Smoke detector  
广播器

Smoke detector  
烟感器

Monitoring aids  
监控设备

Air purifier  
空气净化器

功能模块可根据不同需要选装不同设备，照明、感应、消防、监控等均可替换安装。

Function modules can be installed according to different needs of different equipment, lighting, induction, fire, monitoring, etc., can be replaced.



双边发光/单边发光/不发光，三种规格可选。

Bilateral luminescence / unilateral luminescence / non-luminescence, three specifications are available.

Bilateral luminescence

双边发光



Unilateral luminescence

单边发光



Non-luminescence

不发光





使用场景

适用于办公室、书房、会议室、公共建筑、图书馆等



SPOTLIGHT  
SUH SERIES



SUH苏荷  $\Phi 55\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SUH801	3W/5W/7W	100Lm/w	$\Phi 55\text{mm}$	$\Phi 63 \times \text{H}89\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K	3000K	3500K 4000K

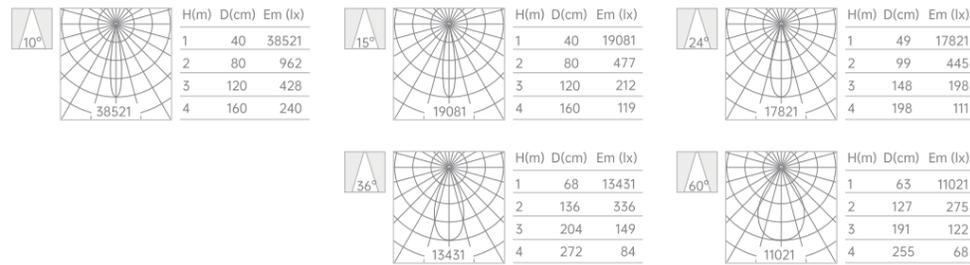

SUH苏荷  $\Phi 75\text{mm}$





Model	Power	Luminous flux	Trepanning	Size
SUH802	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 82 \times \text{H}93\text{mm}$
SUH802	12W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 82 \times \text{H}93\text{mm}$
SUH802A	15W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 82 \times \text{H}103\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K	3000K	3500K 4000K

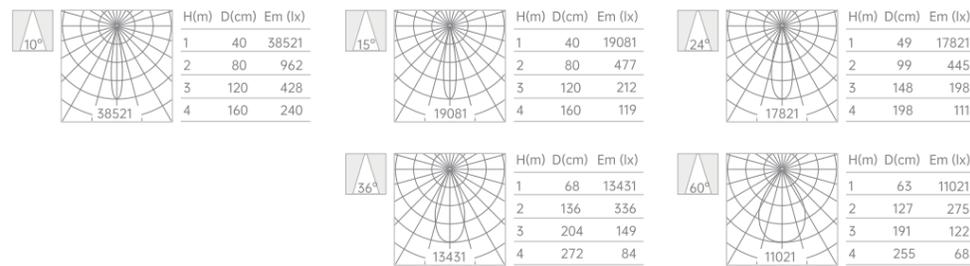

SUH苏荷  $\Phi 95\text{mm}$





Model	Power	Luminous flux	Trepanning	Size
SUH803	18W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105 \times \text{H}110\text{mm}$
SUH803	23W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105 \times \text{H}110\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K	3000K	3500K 4000K

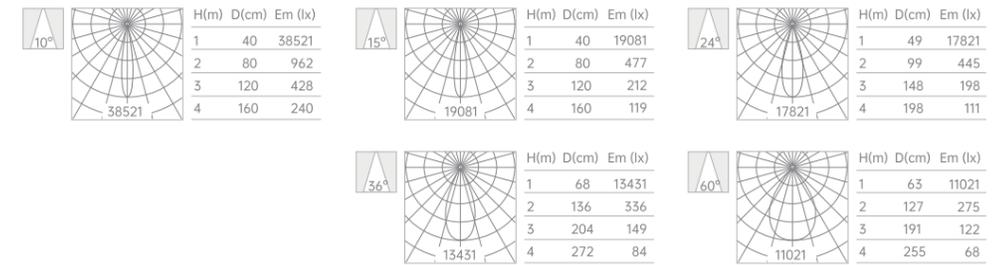


SUH苏荷  $\Phi 105\text{mm}$



Model	Power	Luminous flux	Trepanning	Size
SUH801W	3W/5W/7W	100Lm/w	$\Phi 55\text{mm}$	$\Phi 85 \times \text{H}55\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K	3000K	3500K 4000K

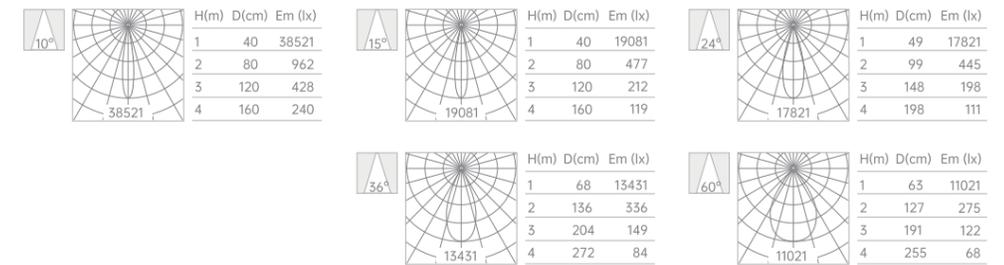


SUH苏荷  $\Phi 75\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SUH802W	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 109 \times H93\text{mm}$
	12W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 109 \times H93\text{mm}$
	15W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 109 \times H100\text{mm}$

CRI	Optic	CCT
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K 3000K 3500K 4000K

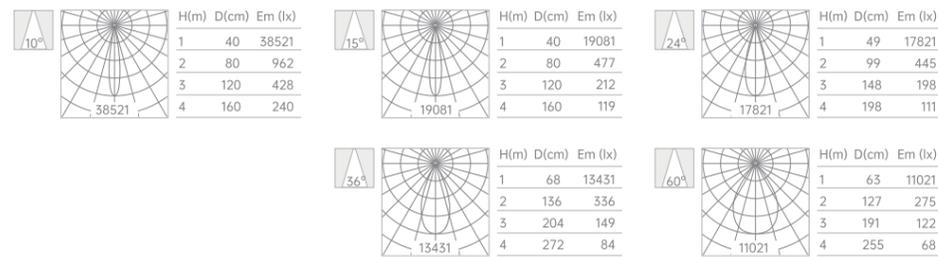


SUH苏荷  $\Phi 95\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SUH803W	18W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 133 \times H122\text{mm}$

CRI	Optic	CCT
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K 3000K 3500K 4000K

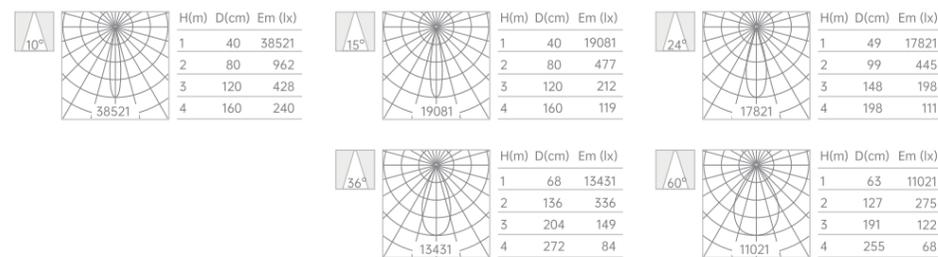


SUH苏荷  $\Phi 55/75/95\text{mm}$   
IP65



Model	Power	Luminous flux	Trepanning	Size
SUH801/IP	7W	100Lm/w	$\Phi 55\text{mm}$	$\Phi 63 \times H55\text{mm}$
SUH802/IP	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 82 \times H93\text{mm}$
SUH803/IP	18W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105 \times H110\text{mm}$


CRI	Optic	CCT
Ra $\geq 90$ Ra $\geq 98$	10°/15°/24°/36°/60°	2700K 3000K 3500K 4000K

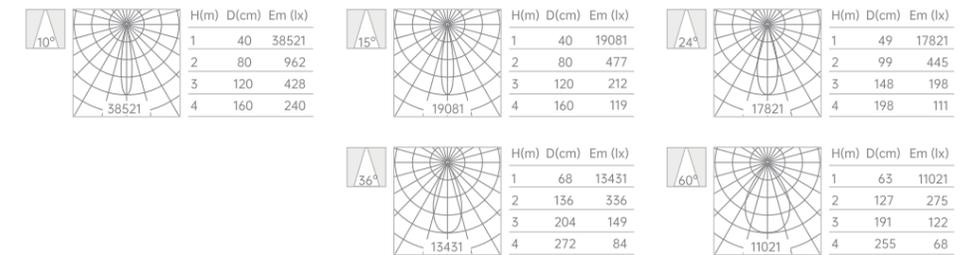

● WASHING WALL  
**SUH POLARIZED  
 SERIES**




**SUH苏荷** 偏光射灯  $\Phi 75/95\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SUH902	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 80*\text{H}93\text{mm}$
	15W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 80*\text{H}93\text{mm}$
SUH903	20W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105*\text{H}117\text{mm}$
	25W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105*\text{H}117\text{mm}$

CRI	Optic	CCT
Ra $\geq$ 90 Ra $\geq$ 98	10°/15°/24°/36°/60°	2700K 3000K 3500K 4000K


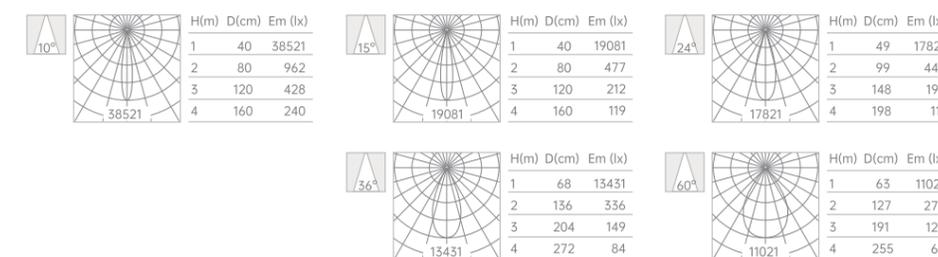


**SUH苏荷** 偏光射灯  $\Phi 75/95\text{mm}$



Model	Power	Luminous flux	Trepanning	Size
SUH902/P	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 80*\text{H}93\text{mm}$
	15W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 80*\text{H}93\text{mm}$
SUH903/P	20W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105*\text{H}117\text{mm}$
	25W	100Lm/w	$\Phi 95\text{mm}$	$\Phi 105*\text{H}117\text{mm}$

CRI	Optic	CCT
Ra $\geq$ 90 Ra $\geq$ 98	10°/15°/24°/36°/60°	2700K 3000K 3500K 4000K

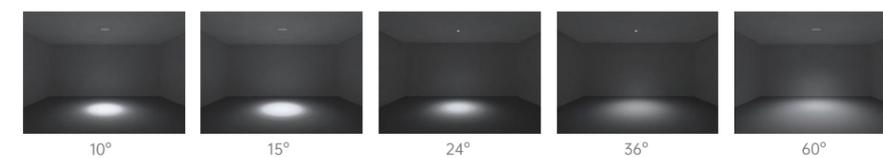
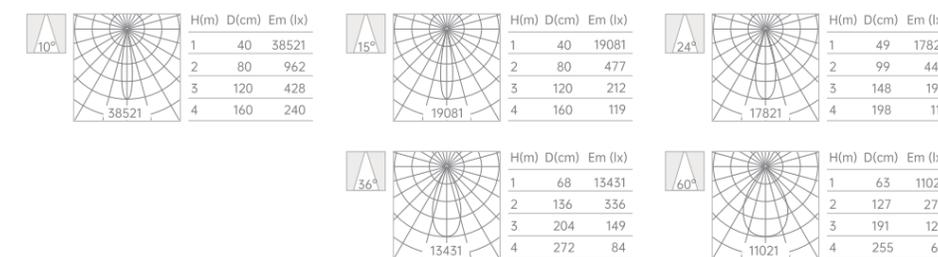




SKY天基  $\Phi 55\text{mm}$





Model	Power	Luminous flux	Trepanning	Size
SKY3011	3W/5W/7W	100Lm/w	$\Phi 55\text{mm}$	$\Phi 63 \times \text{H}75\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	15°/24°/36°/55°	2700K 3000K 3500K 4000K		

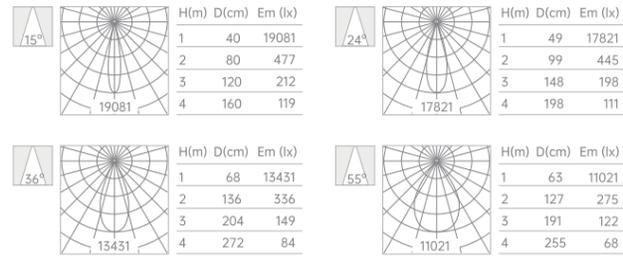

SKY天基  $\Phi 75\text{mm}$





Model	Power	Luminous flux	Trepanning	Size
SKY3012	9W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 85 \times \text{H}82\text{mm}$
	12W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 85 \times \text{H}82\text{mm}$
SKY3012A	15W	100Lm/w	$\Phi 75\text{mm}$	$\Phi 85 \times \text{H}100\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	15°/24°/36°/55°	2700K 3000K 3500K 4000K		

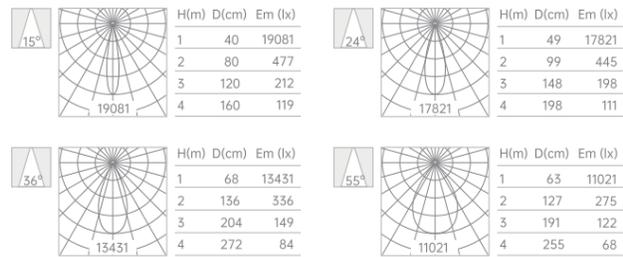

SKY天基  $\Phi 95\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SKY3013	18W	100Lm/w	$\Phi 95-100\text{mm}$	$\Phi 110 \times \text{H}120\text{mm}$
SKY3013A	23W	100Lm/w	$\Phi 95-100\text{mm}$	$\Phi 110 \times \text{H}120\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	15°/24°/36°/55°	2700K 3000K 3500K 4000K		

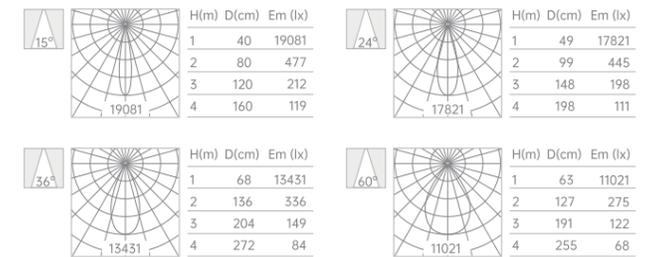


SKY天基  $\Phi 55\text{mm}$




Model	Power	Luminous flux	Trepanning	Size
SKY3011W	3W/5W/7W	100Lm/w	$\Phi 55\text{mm}$	$\Phi 83 \times \text{H}75\text{mm}$
CRI	Optic	CCT		
Ra $\geq 90$ Ra $\geq 98$	15°/24°/36°/60°	2700K 3000K 3500K 4000K		

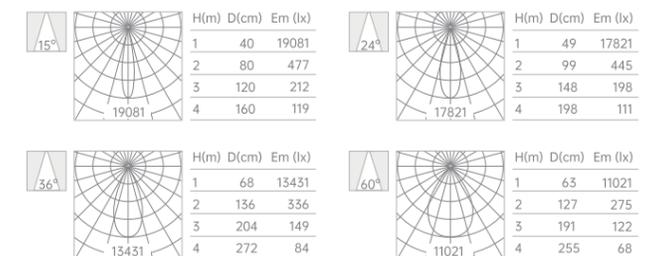


SKY天基 Φ55mm  
无边




Model	Power	Luminous flux	Trepanning	Size
SKY3012W	9W	100Lm/w	Φ75mm	Φ105*H82mm
	15W	100Lm/w	Φ75mm	Φ105*H100mm
CRI	Optic	CCT		
Ra≥90 Ra≥98	15°/24°/36°/60°	<span style="background-color: #FFD700;">2700K</span> <span style="background-color: #FFD700;">3000K</span> <span style="background-color: #FFD700;">3500K</span> <span style="background-color: #FFD700;">4000K</span>		

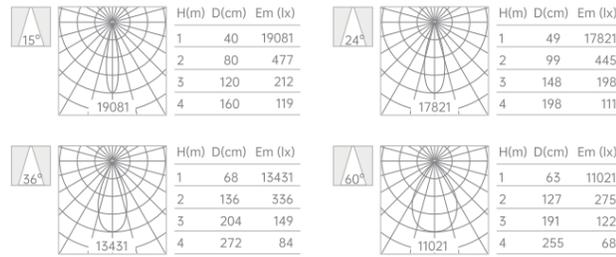


SKY天基 Φ75mm  
无边




Model	Power	Luminous flux	Trepanning	Size
SKY3013W	20W	100Lm/w	Φ95mm	Φ128*H120mm
CRI	Optic	CCT		
Ra≥90 Ra≥98	15°/24°/36°/55°	<span style="background-color: #FFD700;">2700K</span> <span style="background-color: #FFD700;">3000K</span> <span style="background-color: #FFD700;">3500K</span> <span style="background-color: #FFD700;">4000K</span>		

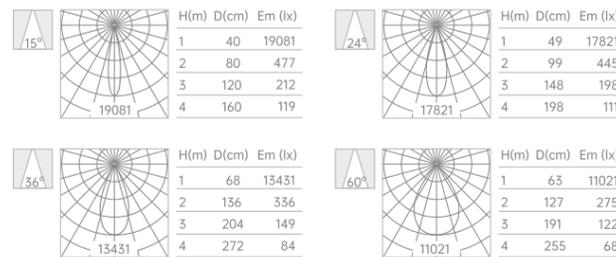

SKY天基 Φ单头55/75/95/100mm  
格栅

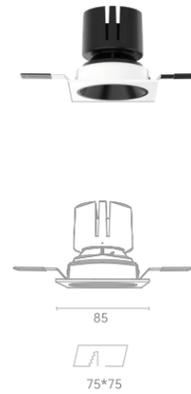


Model	Power	Luminous flux	Trepanning	Size
SKYF3011	7W	100Lm/w	W55*L55mm	65*65*H82mm
SKYF3012	9W	100Lm/w	W75*L75mm	85*85*H82mm
SKYF3012A	15W	100Lm/w	W75*L75mm	85*85*H102mm
SKYF3013	18W	100Lm/w	W100*L100mm	110*100*H110mm
CRI	Optic	CCT		
Ra≥90 Ra≥98	15°/24°/36°/55°	<span style="background-color: #FFD700;">2700K</span> <span style="background-color: #FFD700;">3000K</span> <span style="background-color: #FFD700;">3500K</span> <span style="background-color: #FFD700;">4000K</span>		

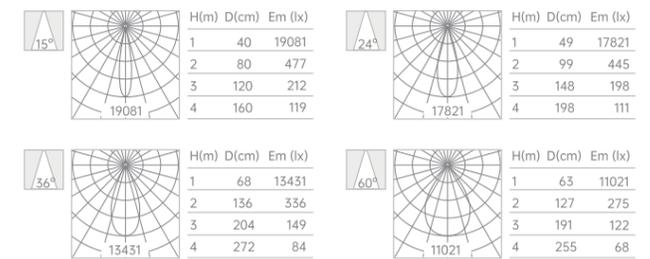


SKY天基 Φ双头55/75/100mm  
格栅



Model	Power	Luminous flux	Trepanning	Size
SKYF3021	7W*2	100Lm/w	W55*L120mm	65*129*H82mm
SKYF3022	9W*2	100Lm/w	W75*L160mm	85*172.5*H82mm
SKYF3022	15W*2	100Lm/w	W75*L160mm	85*172.5*H100mm
SKYF3023	18W*2	100Lm/w	W100*L210mm	85*223*H110mm
CRI	Optic	CCT		
Ra≥90 Ra≥98	15°/24°/36°/55°	<span style="background-color: #FFD700;">2700K</span> <span style="background-color: #FFD700;">3000K</span> <span style="background-color: #FFD700;">3500K</span> <span style="background-color: #FFD700;">4000K</span>		

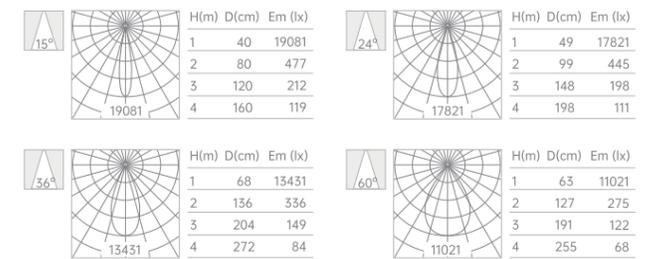


**SKY天基** Φ三头55/75mm  
格栅




Model	Power	Luminous flux	Trepanning	Size
SKYF3031	7W*3	100Lm/w	w55*L120mm	65*129*H82mm
SKYF3032	9W*3	100Lm/w	W75*L250mm	85*260*H82mm
SKYF3032	15W*3	100Lm/w	W75*L250mm	85*260*H100mm

CRI	Optic	CCT
Ra≥90 Ra≥98	15°/24°/36°/55°	<span style="background-color: orange;">2700K</span> <span style="background-color: orange;">3000K</span> <span style="background-color: orange;">3500K</span> <span style="background-color: orange;">4000K</span>

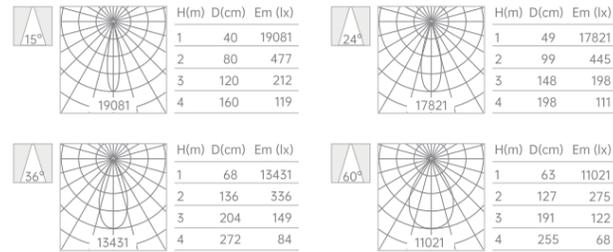



**SKY天基** Φ75/90/100/115/145/170mm  
无边



Model	Power	Luminous flux	Trepanning	Size
SKY-T502	9W	100Lm/w	Φ75mm	Φ82*H53mm
SKY-T502T	9W	100Lm/w	Φ90mm	Φ96*H58mm
SKY-T503	12W	100Lm/w	Φ100mm	Φ106*H63mm
SKY-T504	18W	100Lm/w	Φ115mm	Φ130*H75mm
SKY-T505	24W	100Lm/w	Φ145mm	Φ155*H76mm
SKY-T506	35-40W	100Lm/w	Φ170mm	Φ185*H83mm

CRI	Optic	CCT
Ra≥90 Ra≥98	60°	<span style="background-color: orange;">2700K</span> <span style="background-color: orange;">3000K</span> <span style="background-color: orange;">3500K</span> <span style="background-color: orange;">4000K</span> <span style="background-color: orange;">5000K</span>



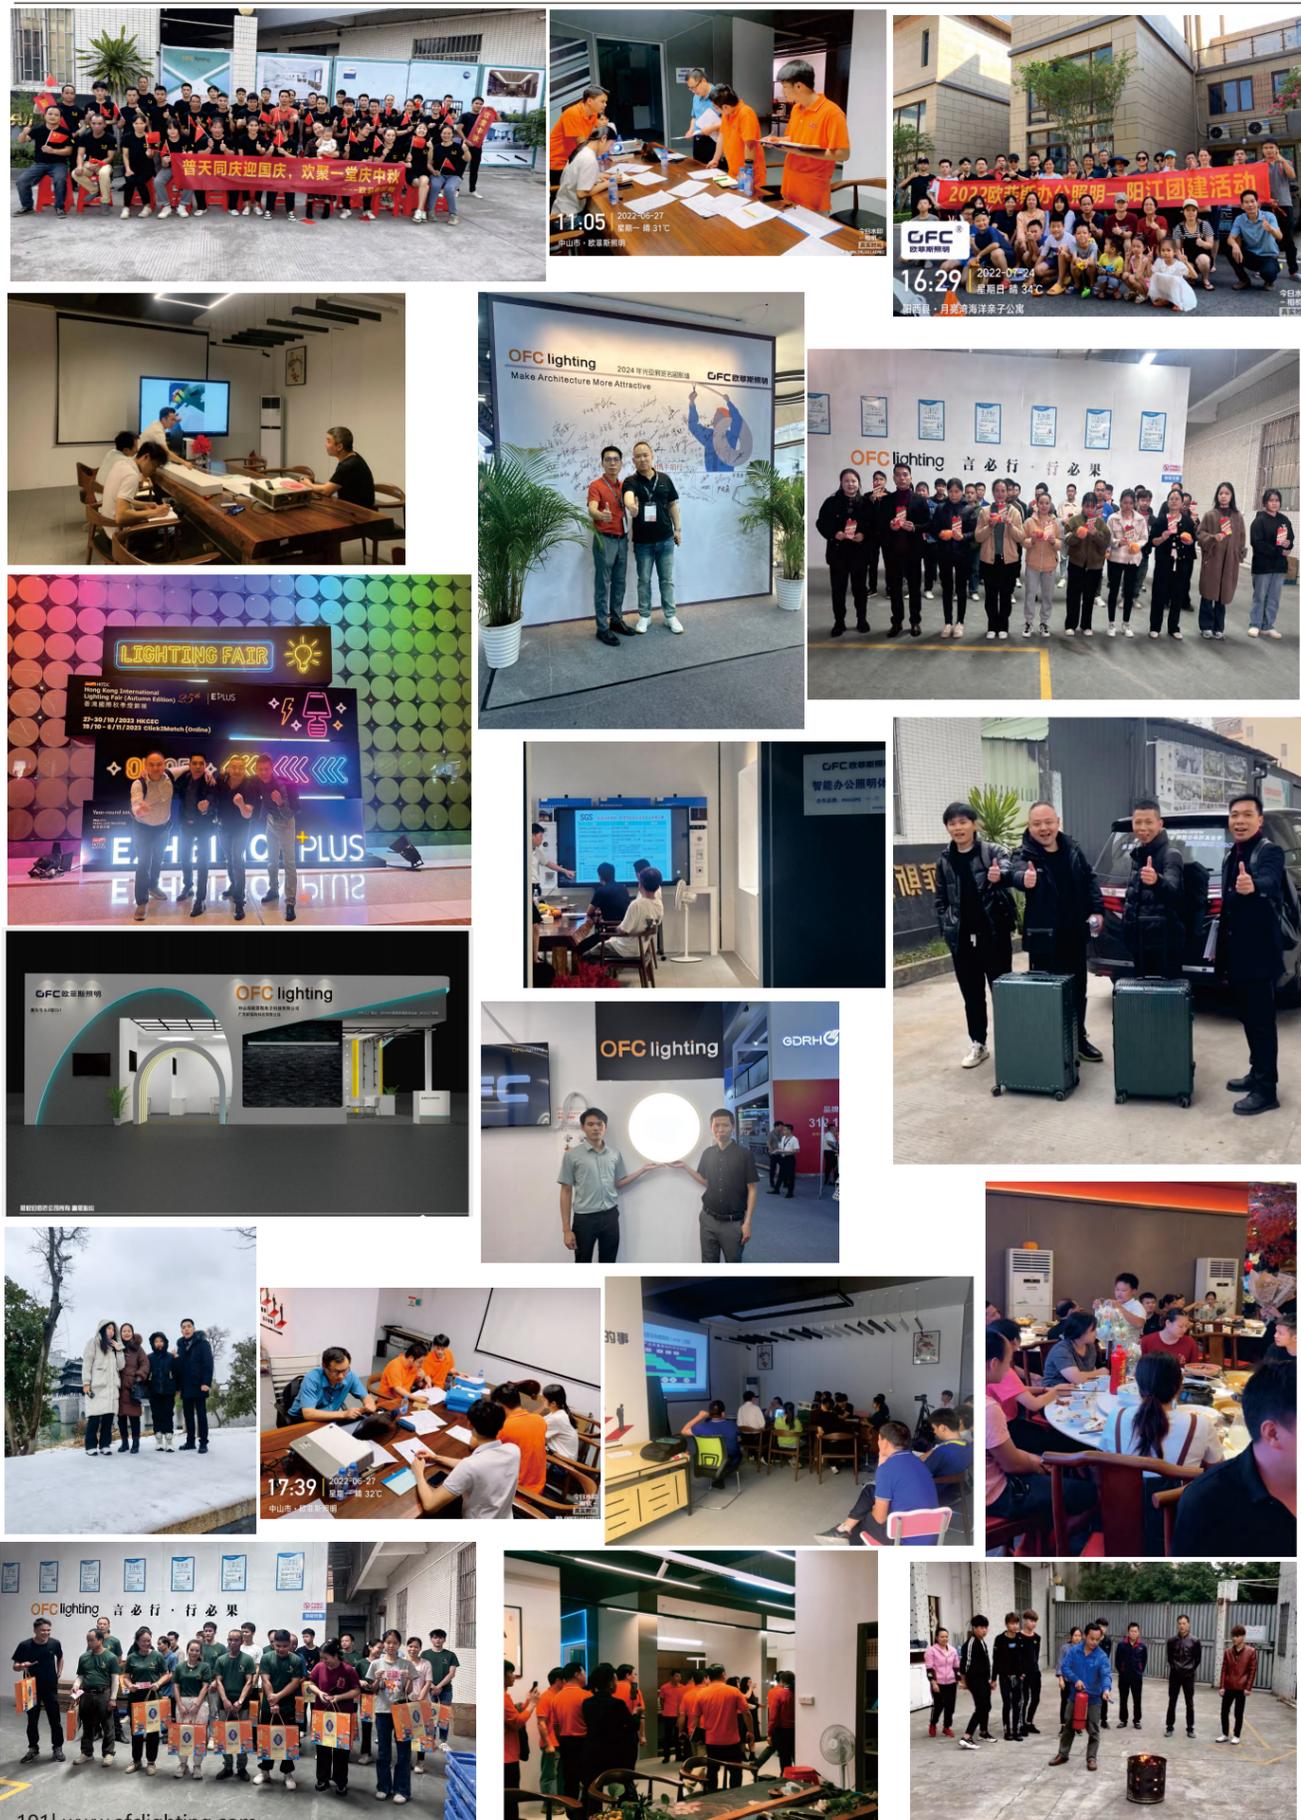





西安交通大学  
XI'AN JIAOTONG UNIVERSITY




湖南中联重科  
总部项目

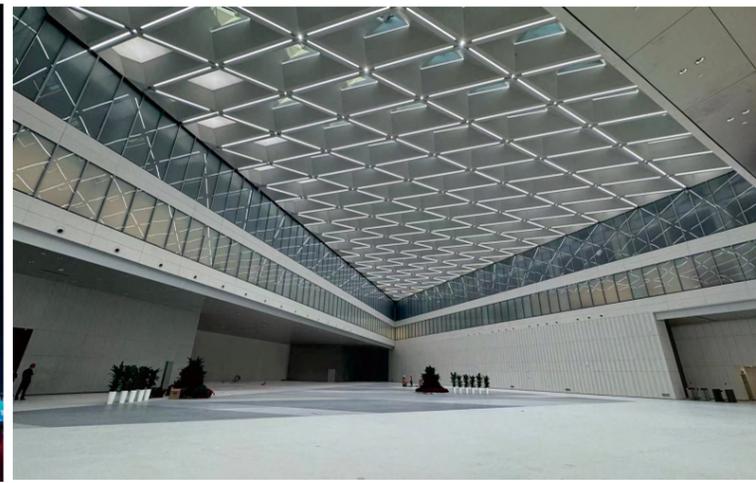

中国卫星网络集团总部 (雄安)

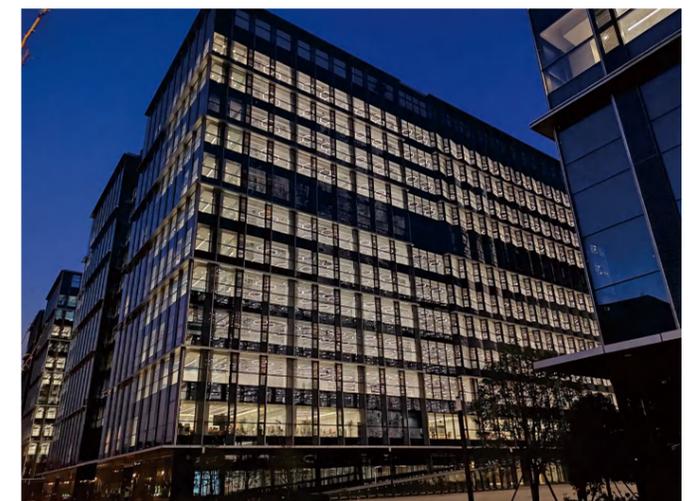

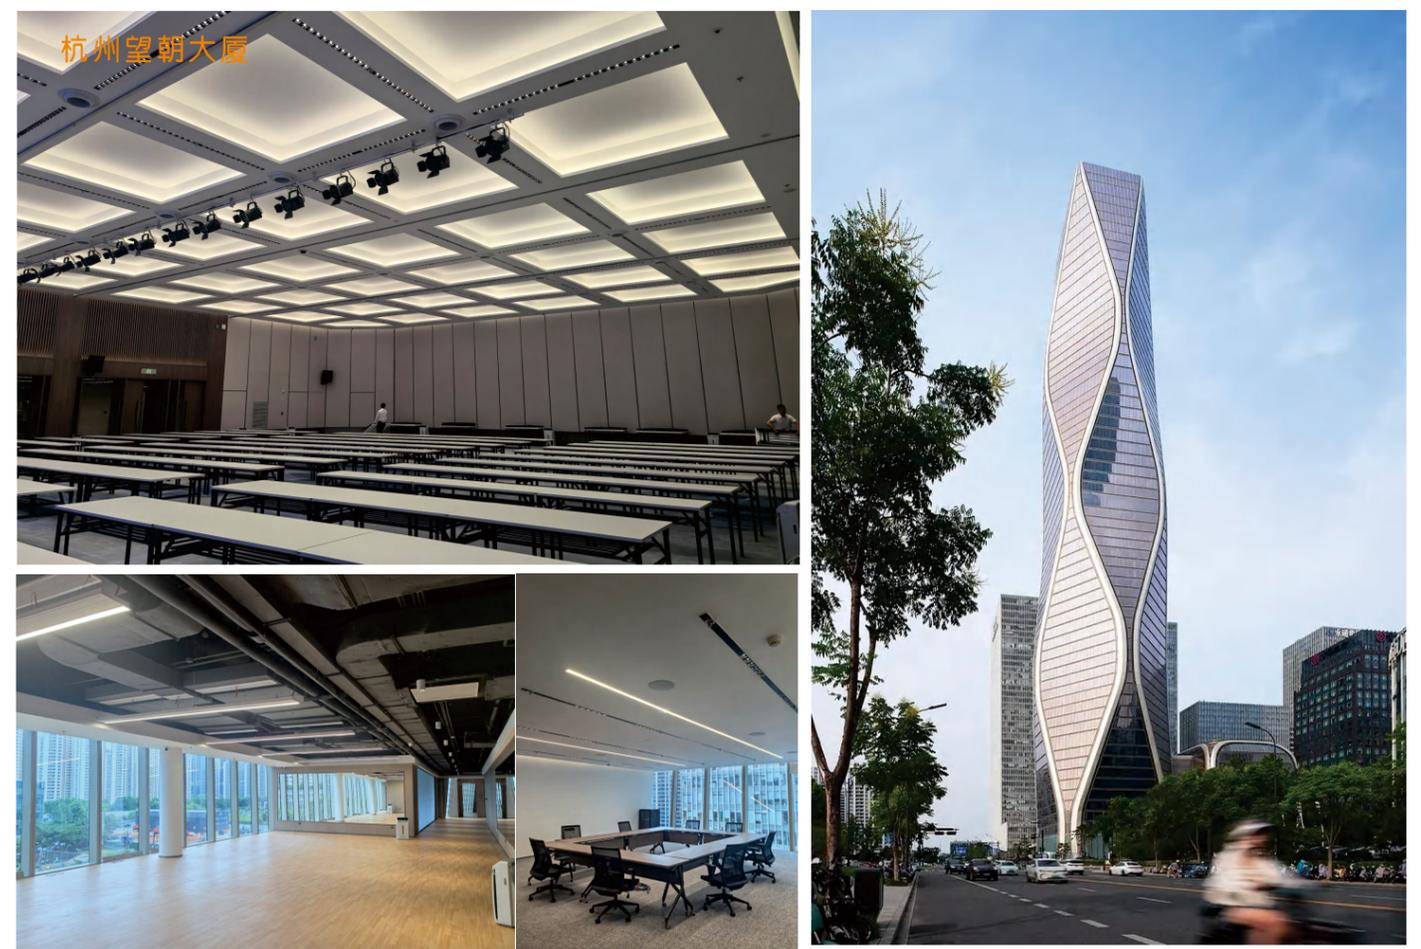

集成灯带+灯具应用 (异形)



集成灯带+灯具应用 (异形)



江西高校出版社 (南昌)

